




### FERTILISER & LIME SPREADERS \*NEW\* - 2000 SERIES

- Eight model range – 7m3 to 19.3m3
- Hydraulic Drive Only
- ISOBUS Interface
- Single & Twin Belt Models
- Section Control (14 Sections)
- Load Cells Options – ISOBUS & Monitor
- Positive Drive Floor Belt
- 12 – 36 mtr Spreading
- Incorporated Stainless Steel – Key Areas
- Full Stainless-Steel Options
- Adjustable Rear Spreading Deck
- Headland Border Control
- Single & Tandem Axle Models
- Hydraulic Wind Deflector Curtains
- Optional Equipment Available




### FERTILISER & LIME SPREADERS - AS SERIES

- Eight model range – 3.2m3 to 15m3
- Hydraulic Drive & Ground Drive Options
- ISOBUS or ISOCAN Interface
- Single Floor Belt Models Only
- Auto On/Off
- Load Cells Options – ISOBUS & Monitor
- 12 – 36 mtr Spreading
- Incorporated Stainless Steel – Key Areas
- Full Stainless-Steel Options
- Headland Border Control
- Single & Tandem Axle Models
- Hydraulic Wind Deflector Curtains
- Optional Equipment Available

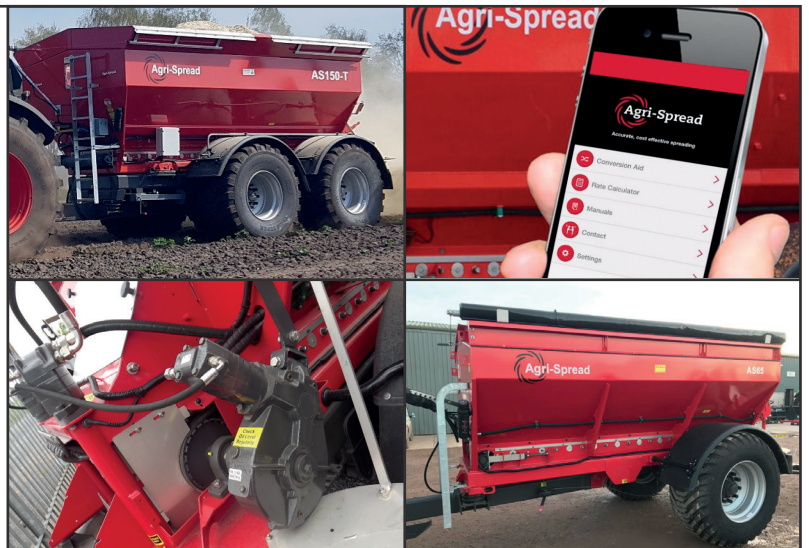



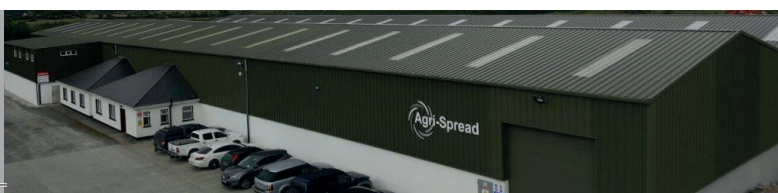

### VERTICAL BEATER SPREADER - VB PRO SERIES

- Six model range – 6m3 to 12m3 Single Axle
- Hydraulic Variable Floor Chain Drive
- Twin 16mm Chain Floor System & Single Lats
- Slurry Door - Standard
- Wide Angle 1000 PTO - Standard
- Mudguards - Option
- Rear Rotor Hood Canopy - Option
- Rate Controller – Option
- Slurry Door Indicator - Option
- Sprung Drawbar - Option
- Weight Cells - Option
- ISOBUS - Option
- Air/Hydraulic Brake Options
- Extension Options – Steel or Wood
- Dynamically Balanced Vertical Beaters 420 RPM
- Optional Equipment & Tyres Available



### Agri-Spread International

 Coolnaha, Ballyhaunis,  
Co. Mayo, Ireland.  
 +353 9496 31808

 terry@agrispread.com  
 www.agrispread.com

**FERTILIZER & LIME SPREADER SPECIFICATIONS - 2000 SERIES**

MODEL	AS265	AS285	AS2100	AS2120	AS2130T	AS2150T	AS2200T	AS2220T
BIN LENGTH (MM)	3330	3630	3630	4228	4640	4640	5632	5632
BIN WIDTH (MM)	2245	2245	2245	2245	2245	2245	2245	2245
LOADING HEIGHT (LOADS CELLS), (MM)	2560	2560	2800	2800	2710	2985	2870	3133
CAPACITY, (M <sup>3</sup> )	7	7.6	9.2	10.7	12.4	14.7	15.1	19.3
LIME CAPACITY HEAPED, (TONNES)	9.2	11.9	13.5	14.5	17.5	19.5	23.3	25
TYRES	600/55-26.5	600/65-30.5	600/65-30.5	600/65-30.5	600/55-26.5	600/55-26.5	650/65-30.5	650/65-30.5
AXLE TRACK WIDTH, (M)	2 or 3	2 or 3	2 or 3	2 or 3	2 or 3	2 or 3	2 or 3	2 or 3
SPRUNG DRAWBAR	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
HOPPER MESH	25mm	25mm	25mm	25mm	25mm	25mm	25mm	25mm
DRIVE SYSTEM	Hydraulic Drive	Hydraulic Drive	Hydraulic Drive	Hydraulic Drive	Hydraulic Drive	Hydraulic Drive	Hydraulic Drive	Hydraulic Drive
RATE CONTROLLER TYPE	ISOBUS	ISOBUS	ISOBUS	ISOBUS	ISOBUS	ISOBUS	ISOBUS	ISOBUS
SECTION CONTROL - TWIN BELT 14 SECTIONS	Option	Option	Option	Option	Option	Option	Option	Option
HYDRAULIC BRAKES	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
ROLL OVER COVER	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

**FERTILIZER & LIME SPREADER SPECIFICATIONS - AS SERIES**

MODEL	AS35	AS55	AS65	AS85	AS100	AS120	AS130-T	AS150-T
BIN LENGTH (MM)	3000	3000	3600	3600	3600	4223	4624	4624
BIN WIDTH (MM)	1800	2000	2000	2250	2250	2250	2244	2244
LOADING HEIGHT (LOADS CELLS), (MM)	N/A	2250	2250	2610	2800	2800	2725	3000
CAPACITY, (M <sup>3</sup> )	3.2	5	6	7.4	9.2	10.6	11.6	15
LIME CAPACITY HEAPED, (TONNES)	5.3	7.6	9.2	12.5	14	15.5	17.5	19.5
TYRES	550/60-22.5	550/60-22.5	600/55-26.5	650/65-30.5	650/60-30.5	650/65-30.5	600/55-26.5	600/60-26.5
AXLE CROSS SECTION, (MM)	1x80SQ	1x80SQ	1x120SQ	1x150SQ	1x150SQ	1x150SQ	2x ø127	2x ø127
AXLE TRACK WIDTH, (M)	2 or 3	2 or 3	2 or 3	2 or 3	2 or 3	2 or 3	2 or 3	2 or 3
SPRUNG DRAWBAR	Optional	Optional	Yes	Yes	Yes	Yes	Yes	Yes
HOPPER MESH GALVANISED	25mm	25mm	25mm	25mm	25mm	25mm	25mm	25mm
LAND DRIVE & HYD DRIVE (SINGLE BELT)	Land Drive & Hyd Drive	Land Drive & Hyd Drive	Land Drive & Hyd Drive	Land Drive & Hyd Drive	Land Drive & Hyd Drive	Land Drive & Hyd Drive	Land Drive & Hyd Drive	Land Drive & Hyd Drive
RATE CONTROLLER TYPE	Land Drive & ISOBUS	Land Drive & ISOBUS	Land Drive & ISOBUS	Land Drive & ISOBUS	Land Drive & ISOBUS	Land Drive & ISOBUS	Land Drive & ISOBUS	Land Drive & ISOBUS
HYDRAULIC BRAKES	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
ROLL OVER COVER	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

**VERTICAL BEATER MANURE SPREADER SPECIFICATIONS - VBS SERIES**

MODEL	Pro - 6000		Pro - 9000		Pro - 10000		Pro - 10000 COMPACT		Pro - 11000		Pro - 12000		AS26000 TANDEM AXLE		
CAPACITY (tons)	6		9		10		10		11		12		26		
VOLUME - LEVEL FILLED (m <sup>3</sup> )	5.7		8.6		9.6		9.6		10.4		11.8		20		
VOLUME - LEVEL EXTENSION (m <sup>3</sup> )	7.3		10.7		12.9		12.9		12.7		14.3		N/A		
VOLUME - MAX. HEAPED (m <sup>3</sup> )	9.9		15.2		17		17		17.3		19.5		26		
STANDARD WHEELS	460/85 R38		520/85 R38		520/85 R38		520/85 R38		520/85 R38		580/70 R38		650/55 26.5		
AXLE BEAM (mm)	90 x 90		120 x 120		120 x 120		120 x 120		120 x 120		120 x 120		2 x 150mm		
AXLE STUD / BRAKE SIZE (mm)	8 stud/400 x 80		10 Stud/406 x120		10 Stud/406 x120		10 Stud/406 x120		10 Stud/406 x120		10 Stud/406 x120		10 stud/420 x 180		
NO. OF FLOOR CHAINS / CHAIN SIZE	2/16 mm Grade 80		2/16 mm Grade 80		2/16 mm Grade 80		2/16 mm Grade 80		2/16 mm Grade 80		2/16 mm Grade 80		2 x 20mm Grade 80		
FLOOR SHAFT DIAMETER (mm)	50 High tensile		50 High tensile		50 High tensile		50 High tensile		50 High tensile		50 High tensile		60 High tensile		
PTO INPUT (RPM)	1000		1000		1000		1000		1000		1000		1000		
POWER REQUIREMENT (hp)	85		100		100		100		115		130		225		
UNADEN WEIGHT (kg)	4,180		4580		5080		4650		4890		5190		11,400kg		
MEASUREMENTS (mm/ft)	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	
	OVERALL LENGTH	6,060	19' 9"	7010	23'	7610	25' 2"	6425	21'	7090	23' 2"	7660	25' 1"	10470	34' 4"
	OVERALL HEIGHT	2690	8' 8"	2945	9' 7"	2945	10' 1"	3075	10'	3135	10' 7"	3135	10' 3"	3590	11' 9"
	LOADING HEIGHT	2020	6' 6"	2275	7' 5"	2220	7' 3"	2430	8'	2420	7' 9"	2465	8'	3205	10' 6"
	REAR OVERHANG	1670	5' 5"	1900	6' 3"	1900	6' 3"	1775	5' 8"	1900	6' 3"	1900	6' 3"	2545	8' 4"
	INTERNAL LENGTH	3950	12' 9"	4900	16'	5500	18' 2"	4345	14' 2"	4950	16' 2"	5550	18' 2"	7225	23' 8"
	INTERNAL HEIGHT	875	2' 10"	1050	3' 5"	1050	3' 5"	1250	4' 1"	1250	4' 1"	1250	4' 1"	1460	4' 9"
	OVERALL WIDTH	2810	9' 2"	2870	9' 4"	2870	9' 2"	2930	9' 6"	2870	9' 4"	2930	9' 6"	2926/3676	9' 7"/ 12' 1"
LOADING WIDTH	2000	6' 6"	2100	6' 11"	2100	6' 11"	2510	8' 2"	2200	7' 3"	2200	7' 3"	2060	6' 9"	
INTERNAL WIDTH	1500	4' 9"	1500	4' 9"	1500	4' 9"	1500	4' 9"	1500	4' 9"	1500	4' 9"	1820	6'	

**Other Options Available (Range, Model & Specification Dependent) – Discuss with Dealer:**

- Load Cells
- ISOBUS
- Air/Hyd Brakes
- Steering Axle
- Tyre Options
- Hydraulic Drive
- Rear Bumper/Drawbar
- Salt/Sand Kits
- Work Lights
- Border Control
- Extensions
- Stainless Steel
- Rate Controllers
- Hyd/Electric Covers
- Mudguards
- Lime Booms & Chains
- Hitch Options
- Fert/Lime Disks


**Agri-Spread International**

Coolnaha, Ballyhaunis,  
Co. Mayo, Ireland.

+353 9496 31808

@ terry@agrispread.com

www.agrispread.com