

TRACTORS RANGE



FERRARI

language



THE MOST COMPREHENSIVE RANGE.

The range of **FERRARI** specialist tractors consists of high-performance machines that are extremely reliable and multi-functional, compact in size and very easy to manoeuvre.

The structural characteristics with a short wheelbase and a low centre of gravity, combined with the powerful engines, make **FERRARI** tractors indispensable in cultivating rows, vineyards, fruit groves, greenhouses and in mowing forage in hilly or mountainous areas, in addition to being highly appreciated by municipalities for greens maintenance, cleaning streets and removing snow.

Fitted with homologated cabs, **FERRARI** tractors stand out for their comfortable, practical and welcoming driving position. Ergonomic design, functionality and safety are also mixed in an original and exclusive way.



FERRARI is a brand of **BCS Group**, a leading multinational in the mechanisation industry that designs and manufactures agricultural machinery and garden machinery, machines for independent electricity production and for mobile welding.

The **BCS Group** relies on three manufacturing plants in Italy which are ISO 9001 certified and it boasts distributors and sales branches in all continents.



DT RANGE

Power up to 35 HP

RAPTOR 40 06

LOW RANGE

Power up to 35 HP

CROMO K30|K40 10

CROMO K40 SDT RS 12

MIDDLE RANGE

Power up to 56 HP

CROMO K60 16

COBRAM 60 18

COBRAM V65 20

HIGH RANGE

Power up to 98 HP

THOR V80|V95 24

THOR L80|K105 26

VEGA V80|V95 28

VEGA L80|K105 30

VEGA SDT V80|V95 32

VEGA SDT L80|K105 34



DT RANGE

Power 35 HP



RAPTOR 40

Monodirectional tractors with differentiated wheels.

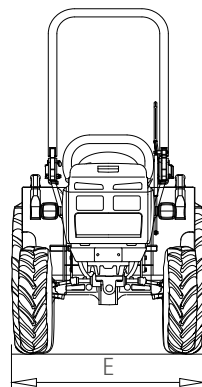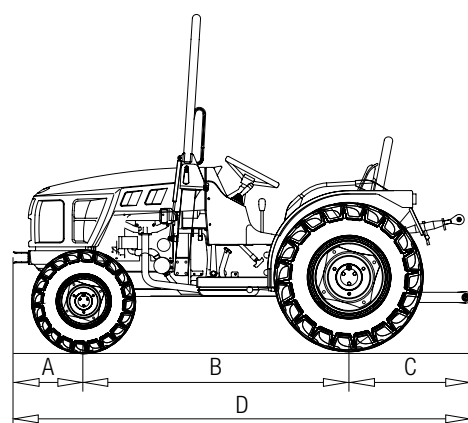

DIMENSIONS:

mm	A	B	C	D	E (min/max)
RAPTOR 40	424	1553	730	2707	1033 / 1513

ENGINE:

RAPTOR 40: Kohler engine, 4 cylinders, 35 HP

TRANSMISSION AND GEARBOX:

Rigid frame with steering wheels
 24 speeds synchronized gearbox (12 FWD and 12 REV) with synchronized reverser
 4-wheel drive with disengageable front axle
 Rear axle with epicyclic reduction units

PTO AND HYDRAULIC SYSTEM:

PTO, independent from the gearbox, 540 rpm and synchronized with forwarding speeds
 High performing hydraulic system (flow rate 21,7 l/min)
 Lifting capacity 700 kg

ACTIVE AND PASSIVE SAFETY:

Multidisc brakes in oil bath
 Rear differential lock

DRIVING POSITION:

Hydrostatic steering

WEIGHT WITH ROLL-BAR:

1100 kg

MAIN OPTIONAL:

Under-belly PTO at 2000 rpm
 Rear lift with position and draft control
 Front lift with front and under-belly PTO at 2000 rpm
 Front weights and weights for rear wheels


LOW RANGE

Power up to 35 HP



CROMO K30 | K40

Monodirectional isodiametric tractors.

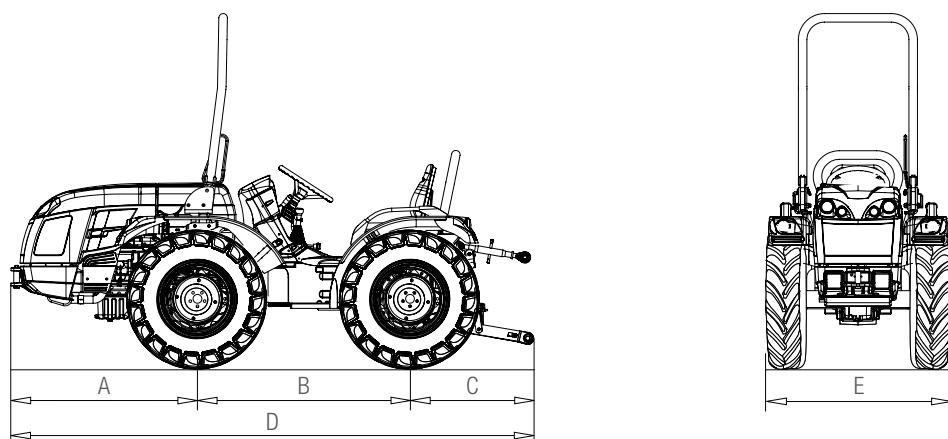

DIMENSIONS:

mm	A	B	C	D	E [AR min/max]	E [RS min/max]
CROMO K30	985	1200	705	2890	989 / 1391	1069 / 1391
CROMO K40	1055	1200	705	2960	989 / 1391	1069 / 1391

VERSIONS:

With central articulation (AR) or with steering wheels (RS)

ENGINE:

CROMO K30: Kubota engine, 3 cylinders, 25 HP

CROMO K40: Kubota engine, 4 cylinders, 35 HP

TRANSMISSION AND GEARBOX:

OS-Frame transmission

12 speeds gearbox (8 FWD + 4 REV) with easy connection

4-wheel drive, permanent

PTO AND HYDRAULIC SYSTEM:

PTO 540 rpm and synchronized with forwarding speeds

High performing hydraulic system (flow rate 16,5 l/min)

Lifting capacity 1050 kg

ACTIVE AND PASSIVE SAFETY:

Service brakes, drum type

Front and rear differential lock

DRIVING POSITION:

Hydrostatic steering

WEIGHT WITH ROLL-BAR:

AR version: 1040 kg [Cromo K30] - 1060 kg [Cromo K40]

RS version: 1060 kg [Cromo K30] - 1080 kg [Cromo K40]

MAIN OPTIONAL:


Independent rear PTO at 540 rpm with electro-hydraulic control, multi-disc oil-bath clutch and synchronized with the gearbox (only for Cromo K40 RS)

Weights for wheels

CROMO SDT RS K40



Monodirectional tractors with short wheelbase and differentiated wheels.

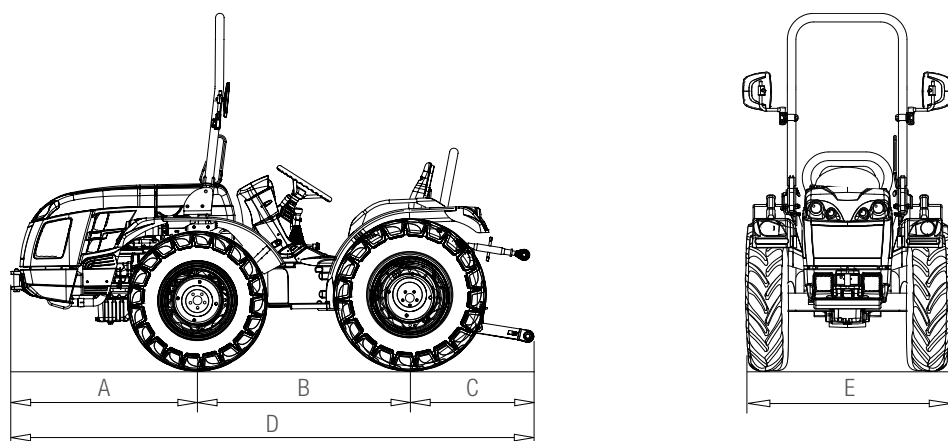

DIMENSIONS:

mm	A	B	C	D	E min/max
CROMO K40 SDT RS	985	1200	775	3025	1062 / 1394

VERSIONS:

With steering wheels (RS)

ENGINE:

CROMO K40 SDT RS: Kubota engine, 4 cylinders, 35 HP

TRANSMISSION AND GEARBOX:

OS-Frame transmission

12 speeds gearbox (8 FWD + 4 REV) with easy connection

4-wheel drive, permanent

PTO AND HYDRAULIC SYSTEM:

PTO 540 rpm and synchronized with forwarding speeds

High performing hydraulic system (flow rate 16,5 l/min)

Lifting capacity 1050 kg

ACTIVE AND PASSIVE SAFETY:

Service brakes, drum type

Front and rear differential lock

DRIVING POSITION:

Hydrostatic steering

WEIGHT WITH ROLL-BAR:

1120 kg

MAIN OPTIONAL:

Independent rear PTO at 540 rpm with electro-hydraulic control, multi-disc oil-bath clutch and synchronized with the gearbox

Weights for wheels


MIDDLE RANGE

Power up to 56 HP



CROMO K60

Isodiametric tractors, monodirectional or reversible.

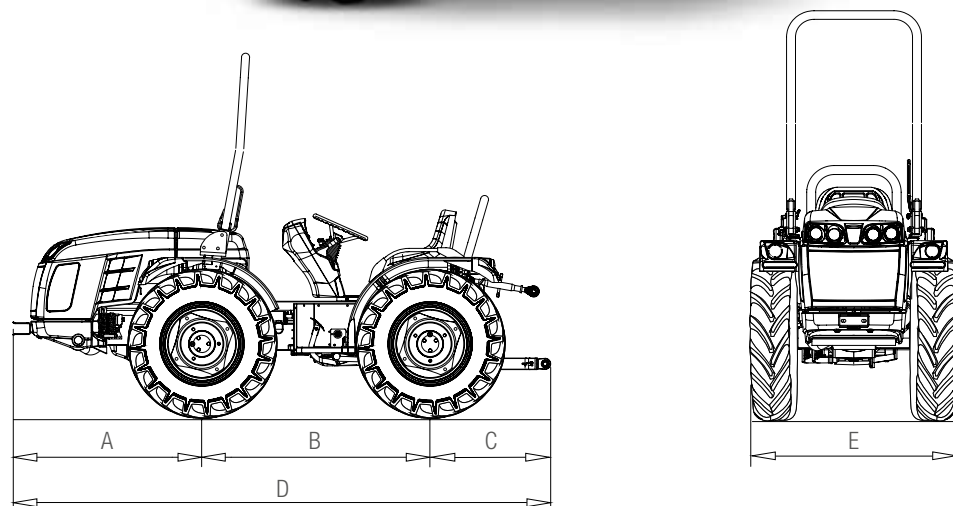

DIMENSIONS:

mm	A	B	C	D	E [AR min/max]	E [RS min/max]	E [MT min/max]
CROMO K60	1150	1390	730	3270	1006 / 1438	1211 / 1643	1491 / 1602

VERSIONS:

With central articulation (AR), with steering wheels (RS) or configured in haymaking version (MT)

ENGINE:

CROMO K60: Kubota engine with counter-balance shafts, 4 cylinders, 48 HP

TRANSMISSION AND GEARBOX:

OS-Frame transmission

24 speeds synchronized gearbox (12 FWD + 12 REV) with synchronized reverser

Multidisc, in oil bath 'Long life' clutch

4-wheel drive, permanent

Axles with epicyclic reduction units

PTO AND HYDRAULIC SYSTEM:

Independent PTO at 540/540E rpm with electro-hydraulic control, multi-disc oil-bath clutch and synchronized with the gearbox

Hydraulic system with double circuit and independent pumps (flow rate 22.1 + 16.8 l/min)

Lifting capacity 1510 kg

ACTIVE AND PASSIVE SAFETY:

Multidisc brakes in oil bath

Front and rear differential lock

DRIVING POSITION:

Hydrostatic steering

Reversible version with driving platform suspended on silent-block and twin pedals

WEIGHT WITH ROLL-BAR:

AR version: 1560 kg

RS version: 1580 kg

MT version: 1650 kg (with semi-cabin)

MAIN OPTIONAL:

Rear lift with position and draft control

Hydraulic system with oversize pump (flow rate 33.1 l/min) and heat exchanger

Hydraulic suspension with Dual Floating System (only for Cromo K60 RS Reversible and standard for MT version)


Joystick with electronic control

Homologated cabs

Front weights and weights for wheels

COBRAM 60

Isodiametric tractors, monodirectional or reversible.

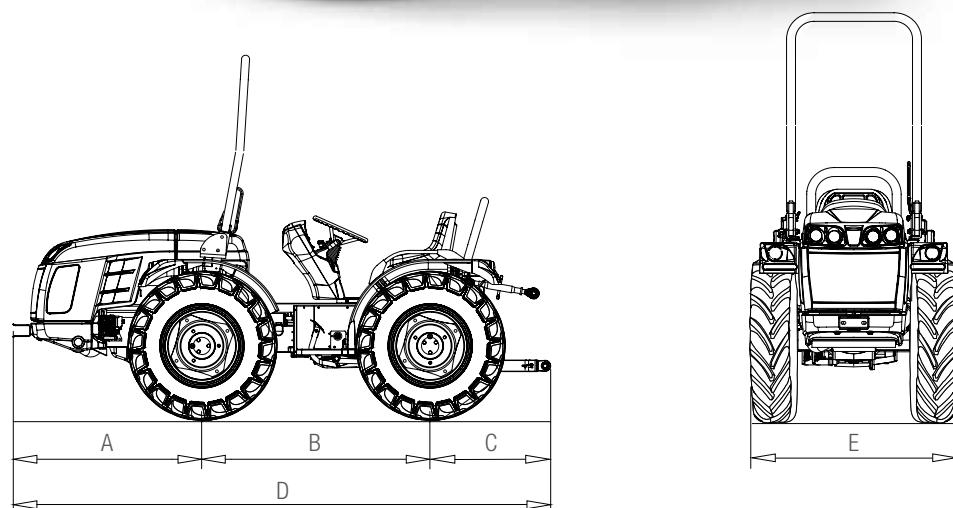

DIMENSIONS:

mm	A	B	C	D	E (AR min/max)	E (RS min/max)
COBRAM 60	1157	1340	779	3276	1006 / 1438	1211 / 1643

VERSIONS:

With central articulation (AR) or with steering wheels (RS)

ENGINE:

COBRAM 60: Kohler engine with counter-balance shafts, 4 cylinders, 49 HP

TRANSMISSION AND GEARBOX:

OS-Frame transmission

24 speeds synchronized gearbox (12 FWD + 12 REV) with synchronized reverser

Multidisc, in oil bath 'Long life' clutch

4-wheel drive, permanent

Axles with epicyclic reduction units

PTO AND HYDRAULIC SYSTEM:

Independent PTO at 540 rpm with electro-hydraulic control, multi-disc oil-bath clutch and synchronized with the gearbox

Hydraulic system with double circuit and independent pumps (flow rate 25.6 + 15.3 l/min)

Lifting capacity 1200 kg

ACTIVE AND PASSIVE SAFETY:

Multidisc brakes in oil bath

Front and rear differential lock

DRIVING POSITION:

Hydrostatic steering

Reversible version with rotating platform and twin pedals

WEIGHT WITH ROLL-BAR:

AR version: 1510 kg

RS version: 1520 kg

MAIN OPTIONAL:

Rear lift with position and draft control

Hydraulic suspension with accumulator (only for Cobram 60 RS Reversible)

Front weights and weights for wheels

COBRAM V65


Isodiametric tractors, monodirectional or reversible.

FERRARI

FOR NON-EC
COUNTRIES
ONLY

21

GAMMA MEDIA

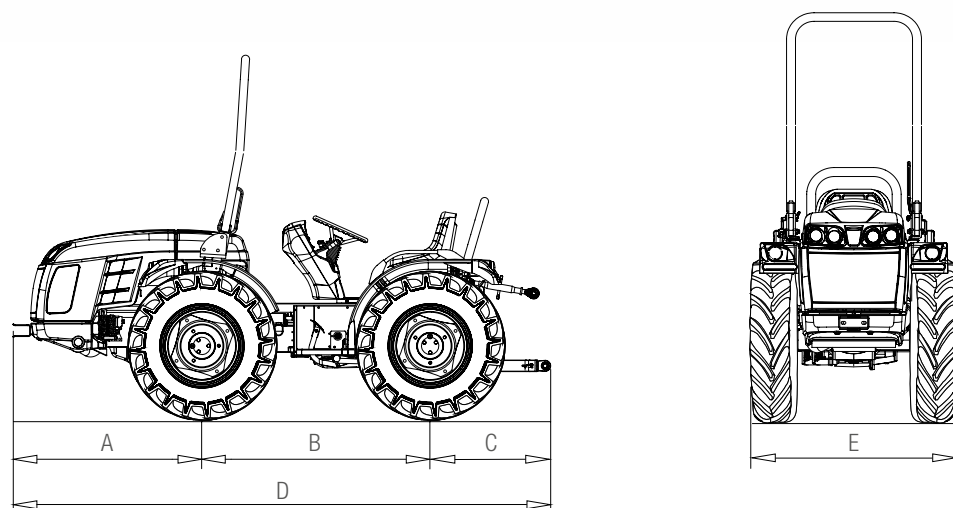

DIMENSIONS:

mm	A	B	C	D	E (AR min/max)	E (RS min/max)
COBRAM V65	1150	1390	730	3270	1006 / 1438	1211 / 1643

VERSIONS:

With central articulation (AR) or with steering wheels (RS)

ENGINE:

COBRAM V65: VM engine, 3 cylinders, 56 HP

TRANSMISSION AND GEARBOX:

OS-Frame transmission

24 speeds synchronized gearbox (12 FWD + 12 REV) with synchronized reverser

Multidisc, in oil bath 'Long life' clutch

4-wheel drive, permanent

Axles with epicyclic reduction units

PTO AND HYDRAULIC SYSTEM:

Independent PTO at 540/540E rpm with electro-hydraulic control, multi-disc oil-bath clutch and synchronized with the gearbox

Hydraulic system with double circuit and independent pumps (flow rate 24.8 + 18.9 l/min)

Lifting capacity 1510 kg

ACTIVE AND PASSIVE SAFETY:

Multidisc brakes in oil bath

Front and rear differential lock

DRIVING POSITION:

Hydrostatic steering

Reversible version with driving platform suspended on silent-block and twin pedals

WEIGHT WITH ROLL-BAR:

AR version: 1540 kg

RS version: 1560 kg

MAIN OPTIONAL:

Rear lift with position and draft control

Hydraulic system with oversize pump (flow rate 37.2 l/min) and heat exchanger

Hydraulic suspension with Dual Floating System (only for Cobram V65 RS Reversible)

Joystick with electronic control

Self Cleaning System

Homologated cabs

Front weights and weights for wheels

HIGH RANGE

Power up to 98 HP



THOR V80|V95


Isodiametric tractors, monodirectional or reversible.

FERRARI

FOR NON-EC
COUNTRIES
ONLY

25

HIGH RANGE

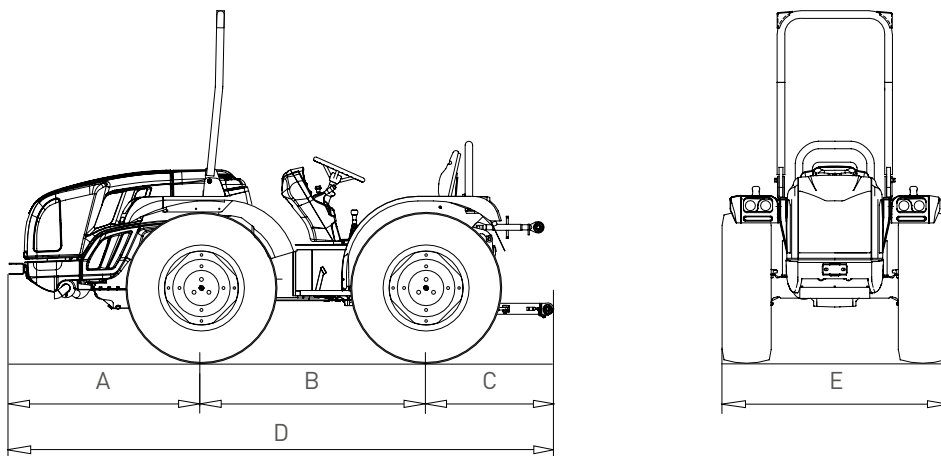

DIMENSIONS:

mm	A	B	C	D	E (AR min/max)	E (RS min/max)
THOR V80	1250	1450	850	3550	1125/1707	1291/1961
THOR V95						

VERSIONS:

With central articulation (AR) or with steering wheels (RS)

ENGINE:

THOR V80: VM engine with counter-balance shafts, 4 cylinders, 73 HP

THOR V95: VM engine with counter-balance shafts, 4 cylinders, 91 HP

TRANSMISSION AND GEARBOX:

OS-Frame transmission

32 speeds synchronized gearbox (16 FWD + 16 REV) with synchronized reverser

Multidisc, in oil bath 'Long life' clutch

4-wheel drive, permanent

Axles with epicyclic reduction units

PTO AND HYDRAULIC SYSTEM:

Independent PTO at 540/540E rpm with electro-hydraulic control, multi-disc oil-bath clutch and synchronized with the gearbox

Hydraulic system with double circuit, independent pumps and heat exchanger (flow rate 28.5 + 28.5 l/min)

Lifting capacity 2300 kg

ACTIVE AND PASSIVE SAFETY:

Multidisc brakes in oil bath

Front and rear differential lock

DRIVING POSITION:

Hydrostatic steering

Reversible version with rotating platform and twin pedals

WEIGHT WITH ROLL-BAR:

AR version: 1950 kg

RS version: 2000 kg

MAIN OPTIONAL:

PTO 540/1000 rpm

Rear lift with position and draft control

Hydraulically controlled upper link and tie rod link arm

Front lift

Self Cleaning System



Hydraulic system with oversize pump (flow rate 49 l/min)

Hydraulic suspension with accumulator (only for RS version)

Front weights and weights for wheels

THOR L80 | K105

Isodiametric tractors, monodirectional or reversible.

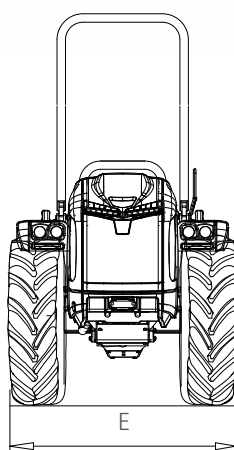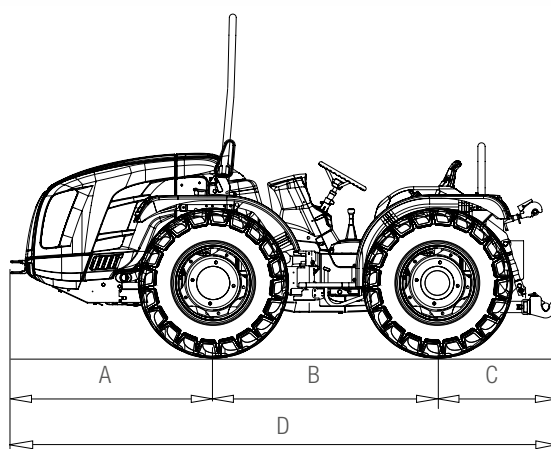

DIMENSIONS:

mm	A	B	C	D	E (AR min/max)	E (RS min/max)
THOR L80	1348	1450	927	3725	1125/1707	1291/1961
THOR K105						

VERSIONS:

With central articulation (AR) or with steering wheels (RS)

ENGINE:

THOR L80: Kohler engine with counter-balance shafts, 4 cylinders, 75 HP

THOR K105: Kubota engine with counter-balance shafts, 4 cylinders, 98 HP

TRANSMISSION AND GEARBOX:

OS-Frame transmission

32 speeds synchronized gearbox (16 FWD + 16 REV) with synchronized reverser

Multidisc, in oil bath 'Long life' clutch

4-wheel drive, permanent

Axles with epicyclic reduction units

PTO AND HYDRAULIC SYSTEM:

Independent PTO at 540/540E rpm with electro-hydraulic control, multi-disc oil-bath clutch and synchronized with the gearbox

Hydraulic system with double circuit, independent pumps and heat exchanger (flow rate 33 + 30 l/min)

Lifting capacity 2300 kg

ACTIVE AND PASSIVE SAFETY:

Multidisc brakes in oil bath

Front and rear differential lock

DRIVING POSITION:

Hydrostatic steering

Reversible version with rotating platform and twin pedals

WEIGHT WITH ROLL-BAR:

AR version: 2090 kg (Thor L80) - 2150 kg (Thor K105)

RS version: 2090 kg (Thor L80) - 2150 kg (Thor K105)

MAIN OPTIONAL:

PTO 540/1000 rpm

Rear lift with position and draft control

Hydraulically controlled upper link and tie rod link arm

Front lift

Hydraulic system with oversize pump (flow rate 49 l/min)

Hydraulic suspension with accumulator (only for RS version)

Front weights and weights for wheels

VEGA V80 | V95



Reversible isodiametric tractors.

FERRARI

FOR NON-EC
COUNTRIES
ONLY

29

HIGH RANGE

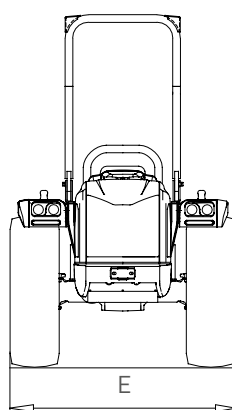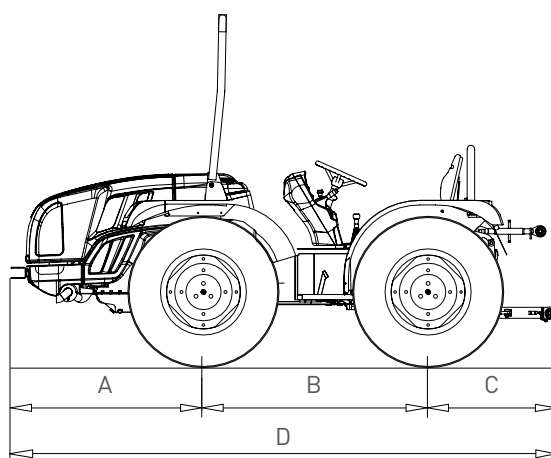

DIMENSIONS:

mm	A	B	C	D	E (AR min/max)	E (RS e DS min/max)	E (MT min/max)
VEGA V80	1260	1495	850	3605	1127 / 1487	1291 / 1961	1697 / 1961
VEGA V95							

VERSIONS:

With central articulation (AR), with steering wheels (RS), Dualsteer® (DS) or configured in haymaking version (MT)

ENGINE:

VEGA V80: VM engine with counter-balance shafts, 4 cylinders, 73 HP

VEGA V95: VM engine with counter-balance shafts, 4 cylinders, 91 HP

TRANSMISSION AND GEARBOX:

OS-Frame transmission

32 speeds synchronized gearbox (16 FWD + 16 REV) with synchronized reverser

Multidisc, in oil bath 'Long life' clutch

4-wheel drive with front wheel disengagement

Axles with epicyclic reduction units

PTO AND HYDRAULIC SYSTEM:

Independent PTO at 540/540E rpm with electro-hydraulic control, multi-disc oil-bath clutch and synchronized with the gearbox

Hydraulic system with double circuit, independent pumps and heat exchanger (flow rate 28.5 + 28.5 l/min)

Lifting capacity 2300 kg

ACTIVE AND PASSIVE SAFETY:

4 multidisc brakes in oil bath with hydrostatic control

Independent Brake-off parking brake

Front and rear differential lock, simultaneously or rear only

DRIVING POSITION:

Hydrostatic steering

Exclusive double steering system for Dualsteer® version

Reversible driving position with platform suspended on silent block and suspended pedals mounted on rotating control column

WEIGHT WITH ROLL-BAR:

AR version: 2180 kg

RS version: 2170 kg

DS version: 2250 kg

MT version: 2260 kg (with semi-cabin)

MAIN OPTIONAL:

PTO 540/1000 rpm (standard for MT version)

Rear lift with position and draft control

Hydraulically controlled upper link and tie rod link arm

Front lift

Hydraulic system with oversize pump (flow rate 49 l/min)

Joystick with electronic control


Self Cleaning System

Homologated cabs

Front weights and weights for wheels

VEGA L80 | K105

Reversible isodiametric tractors.

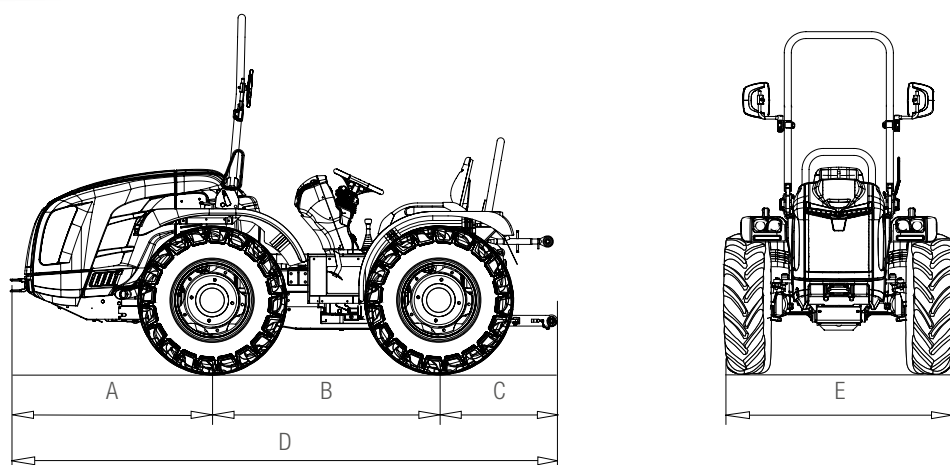

DIMENSIONS:

mm	A	B	C	D	E (AR min/max)	E (RS e DS min/max)	E (MT min/max)
VEGA L80	1348	1495	932	3775	1127/1603	1291/1961	1697/1961
VEGA K105							

VERSIONS:

With central articulation (AR), with steering wheels (RS), Dualsteer® (DS) or configured in haymaking version (MT)

ENGINE:

VEGA L80: Kohler engine with counter-balance shafts, 4 cylinders, 75 HP

VEGA K105: Kubota engine with counter-balance shafts, 4 cylinders, 98 HP

TRANSMISSION AND GEARBOX:

OS-Frame transmission

32 speeds synchronized gearbox (16 FWD + 16 REV) with synchronized reverser

Multidisc, in oil bath 'Long life' clutch

4-wheel drive with front wheel disengagement

Axles with epicyclic reduction units

PTO AND HYDRAULIC SYSTEM:

Independent PTO at 540/540E rpm with electro-hydraulic control, multi-disc oil-bath clutch and synchronized with the gearbox

Hydraulic system with double circuit, independent pumps and heat exchanger (flow rate 33 + 30 l/min)

Lifting capacity 2300 kg

Hydraulic suspension and Dual Floating System (only for MT version)

ACTIVE AND PASSIVE SAFETY:

4 multidisc brakes in oil bath with hydrostatic control

Independent Brake-off parking brake

Front and rear differential lock, simultaneously or rear only

DRIVING POSITION:

Hydrostatic steering

Exclusive double steering system for Dualsteer® version

Reversible driving position with platform suspended on silent block and suspended pedals mounted on rotating control column

WEIGHT WITH ROLL-BAR:

AR version: 2240 kg (Volcan L80) - 2300 kg (Volcan K105)

RS version: 2320 kg (Volcan L80) - 2380 kg (Volcan K105)

DS version: 2390 kg (Volcan L80) - 2450 kg (Volcan K105)

MT version: 2420 kg (Volcan L80) - 2410 kg (Volcan K105) with semi-cabin

MAIN OPTIONAL:

Electro-hydraulic power shuttle EasyDrive®

PTO 540/1000 rpm (standard for MT version)

Rear lift with position and draft control

Hydraulically controlled upper link and tie rod link arm

Front lift

Hydraulic system with oversize pump (flow rate 49 l/min)

Joystick with electronic control

Homologated cabs

Front weights and weights for wheels

VEGA SDT V80|V95


Monodirectional tractors with short wheelbase and differentiated wheels.

FERRARI

FOR NON-EC
COUNTRIES
ONLY

33

HIGH RANGE

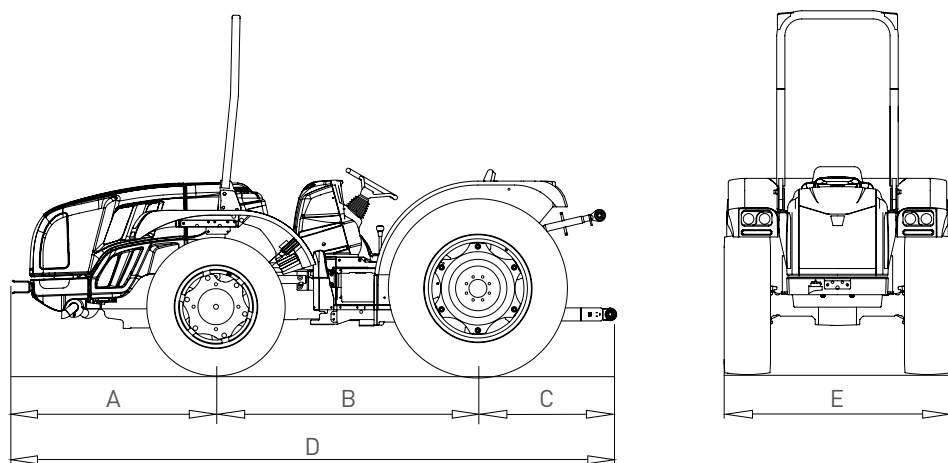

DIMENSIONS:

	A	B	C	D	E (RS min/max)	E (DS min/max)
VEGA SDT V80	1260	1607	850	3923	1358 / 1865	1358 / 1865
VEGA SDT V95						

VERSIONS:

With steering wheels (RS) or Dualsteer® (DS)

ENGINE:

VEGA SDT V80: VM engine with counter-balance shafts, 4 cylinders, 73 HP

VEGA SDT V95: VM engine with counter-balance shafts, 4 cylinders, 91 HP

TRANSMISSION AND GEARBOX:

OS-Frame transmission

32 speeds synchronized gearbox (16 FWD + 16 REV) with synchronized reverser

Multidisc, in oil bath 'Long life' clutch

4-wheel drive with front wheel disengagement

Front axle with epicyclic reduction units and rear axle with cascade reduction units

PTO AND HYDRAULIC SYSTEM:

Independent PTO at 540/540E rpm with electro-hydraulic control, multi-disc oil-bath clutch and synchronized with the gearbox

Hydraulic system with double circuit, independent pumps and heat exchanger (flow rate 28.5 + 28.5 l/min)

Lifting capacity 2700 kg

ACTIVE AND PASSIVE SAFETY:

4 multidisc brakes in oil bath with hydrostatic control

Front and rear differential lock, simultaneously or rear only

DRIVING POSITION:

Hydrostatic steering

Exclusive double steering system for Dualsteer® version

Driving position with platform suspended on silent-block

WEIGHT WITH ROLL-BAR:

RS version: 2400 kg

DS version: 2400 kg

MAIN OPTIONAL:

PTO 540/1000 rpm

Rear lift with position and draft control

Hydraulically controlled upper link and tie rod link arm

Front lift

Hydraulic system with oversize pump (flow rate 49 l/min)

Joystick with electronic control

Independent Brake-off parking brake

Self Cleaning System


Homologated cabs

24" rear wheels

Front weights and weights for wheels

VEGA SDT L80 | K105

Monodirectional tractors with short wheelbase and differentiated wheels.

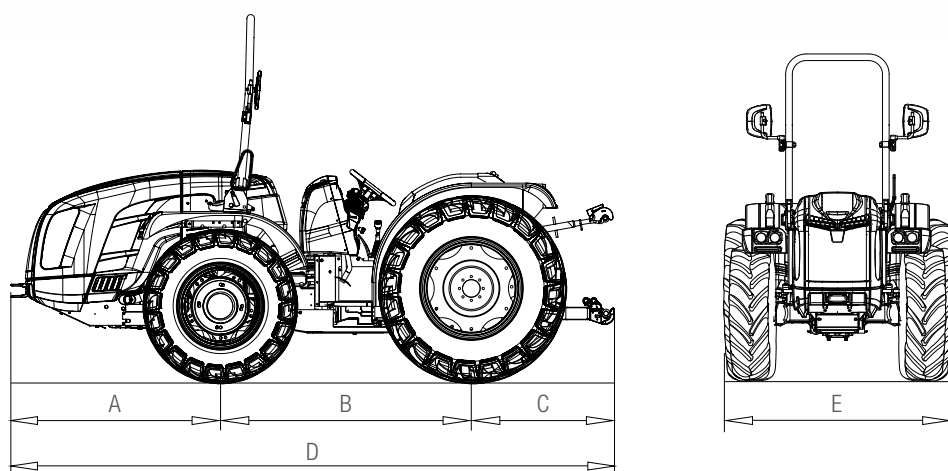

DIMENSIONS:

	A	B	C	D	E (RS min/max)	E (DS min/max)
VEGA SDT L80	1348	1607	968	3923	1363 / 1878	1363 / 1878
VEGA SDT K105						

VERSIONS:

With steering wheels (RS) or Dualsteer® (DS)

ENGINE:

VEGA SDT L80: Kohler engine with counter-balance shafts, 4 cylinders, 75 HP
 VEGA SDT K105: Kubota engine with counter-balance shafts, 4 cylinders, 98 HP

TRANSMISSION AND GEARBOX:

OS-Frame transmission
 32 speeds synchronized gearbox (16 FWD + 16 REV) with synchronized reverser
 Multidisc, in oil bath 'Long life' clutch
 4-wheel drive with front wheel disengagement
 Front axle with epicyclic reduction units and rear axle with cascade reduction units

PTO AND HYDRAULIC SYSTEM:

Independent PTO at 540/540E rpm with electro-hydraulic control, multi-disc oil-bath clutch and synchronized with the gearbox
 Hydraulic system with double circuit, independent pumps and heat exchanger (flow rate 33 + 30 l/min)
 Lifting capacity 2700 kg

ACTIVE AND PASSIVE SAFETY:

4 multidisc brakes in oil bath with hydrostatic control
 Front and rear differential lock, simultaneously or rear only

DRIVING POSITION:

Hydrostatic steering
 Exclusive double steering system for Dualsteer® version
 Driving position with platform suspended on silent-block

WEIGHT WITH ROLL-BAR:

RS version: 2460 kg (Vega SDT L80) - 2520 kg (Vega SDT K105)
 DS version: 2520 kg (Vega SDT L80) - 2570 kg (Vega SDT K105)

MAIN OPTIONAL:

Electro-hydraulic power shuttle EasyDrive®
 PTO 540/1000 rpm
 Rear lift with position and draft control
 Hydraulically controlled upper link and tie rod link arm
 Front lift
 Hydraulic system with oversize pump (flow rate 49 l/min)
 Joystick with electronic control
 Independent Brake-off parking brake
 Compact cabin, pressurised and homologated cat. 4
 24" rear wheels
 Front weights and weights for wheels

THE SERVICES



SPARE PARTS

A complete range of original spare parts, guaranteed directly by the manufacturer.



ASSISTANCE

A team of specialists, well prepared and available to assure an efficient and resolving service.



WARRANTY

A precise certainty for the customer's satisfaction:
2-year warranty included in the price.



LUBRICANTS

We recommend to use the original PowerLube lubricants.



M A D E I N I T A L Y



BCS S.p.A.

Viale Mazzini, 161 - 20081 Abbiategrasso (Milano)
Tel. +39 02 94821 - Fax +39 02 94960800 - info@bcs-ferrari.it

www.ferrariagri.it

