


TECHNICAL SPECIFICATIONS					
<b>EQUIPMENT TYPE</b>	Vertical Chiller				
<b>TEMPERATURE RANGE</b>	<table border="1"> <tr> <td>AMBIENT</td> <td>16   61 / 30   86 °C / °F</td> </tr> <tr> <td>INNER*</td> <td>0 °C / 8 °C 32 °F / 46,4 °F</td> </tr> </table>	AMBIENT	16   61 / 30   86 °C / °F	INNER*	0 °C / 8 °C 32 °F / 46,4 °F
AMBIENT	16   61 / 30   86 °C / °F				
INNER*	0 °C / 8 °C 32 °F / 46,4 °F				
<b>VOLUME GROSS   NET</b>	67 L (2,4 ft <sup>3</sup> ) 54 L (1,9 ft <sup>3</sup> )				
EXTERNAL DIMENSIONS					
<b>HEIGHT</b>	830 mm				
<b>DEPTH</b>	507 mm				
<b>WIDTH</b>	460 mm				
INTERNAL DIMENSIONS					
<b>HEIGHT</b>	503 mm				
<b>DEPTH</b>	378 mm				
<b>WIDTH</b>	352 mm				
<b>INFO</b>					
<b>LID/DOOR TYPE</b>	Door - Glass				
<b>TOTAL DISPLAY AREA</b>	0,18 m <sup>2</sup>				
<b>INTERNAL COATING</b>	Plastified Metal Sheet				
<b>CLIMATE CLASS</b>	3M1				
<b>FREEZING CAPACITY</b>	N.A.				

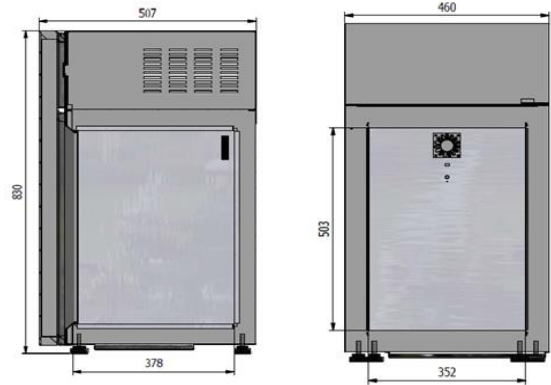

ENERGETIC FEATURES	
<b>VOLTAGE / FREQUENCY</b>	220-240V / 50Hz
<b>NOMINAL CURRENT</b>	0,78 A
<b>POWER</b>	180 W
<b>CONSUMPTION</b>	1,1 kWh/24hr
<b>ENERGY EFFICIENCY</b>	N.A.
<b>NOISE LEVEL</b>	<55 dB
ACCESSORIES	
<b>BASKETS</b>	2
<b>DIVIDER</b>	0
<b>SHELVES</b>	0
<b>WATER DRAIN</b>	Yes
<b>THERMOMETER</b>	Yes-digital
<b>LOCK</b>	No

COMPONENTS	
<b>COMPRESSOR</b>	Embraco
<b>CONDENSER</b>	Ventilated
<b>THERMOSTAT</b>	Dixell - Digital
<b>REFRIGERANT</b>	R290
<b>EVAPORATOR</b>	Hidden
<b>LIGHT</b>	LED

PACKING LIST	
PACKING DIMENSIONS	
<b>HEIGHT</b>	905 mm
<b>DEPTH</b>	645 mm
<b>WIDTH</b>	590 mm
WEIGHT	
<b>EQUIPAMENT</b>	44 kg
<b>EQUIPAMENT + PACKGING</b>	56 kg

Approved by: Rui Ribeiro

07/08/2020

This leaflet is merely informative, subject to changes in technical data and typographical errors, and may not be used as a contractual document.

\*Temperature on steady state, at the load line, with empty and closed equipment, at the correspondent climatic class ambient conditions.

EXPEDITION			
CAPACITY	20'	40' HC	45'   TRUCK
	72	160	176