


TECHNICAL SPECIFICATIONS	
<b>EQUIPMENT TYPE</b>	Mobiling
<b>TEMPERATURE RANGE</b>	AMBIENT +16 °C / +30 °C INNER* ≤ -16 °C up to 7h ≤ 3,2 °F up to 7h
<b>GROSS   NET VOLUME</b>	125 L (4,4 ft <sup>3</sup> ) 110 L (3,9 ft <sup>3</sup> )
EXTERNAL DIMENSIONS	
<b>HEIGHT</b>	1140 mm
<b>DEPTH</b>	2300 mm
<b>WIDTH</b>	920 mm
INTERNAL DIMENSIONS	
<b>HEIGHT</b>	530 mm
<b>DEPTH</b>	500 mm
<b>WIDTH</b>	500 mm
INFO	
<b>LID/DOOR TYPE</b>	Lid - Opaque
<b>TOTAL DISPLAY AREA</b>	N.A.
<b>INTERNAL COATING</b>	Pre Painted Metal Sheet
<b>CLIMATE CLASS</b>	4L1
<b>FREEZING CAPACITY</b>	N.A.

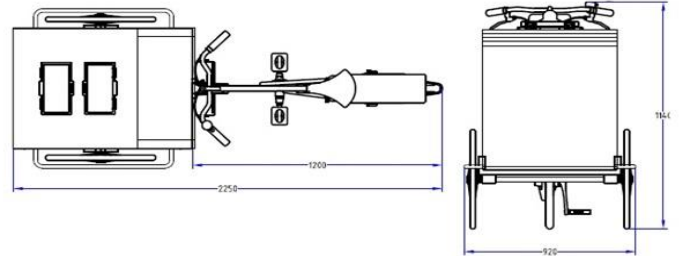

ENERGETIC FEATURES	
<b>VOLTAGE / FREQUENCY</b>	220-240V / 50Hz
<b>NOMINAL CURRENT</b>	1,17 A
<b>POWER</b>	242 W
<b>CONSUMPTION</b>	2,15 kWh/24hr
<b>ENERGY EFFICIENCY</b>	N.A.
<b>NOISE LEVEL</b>	<56 dB
ACCESSORIES	
<b>BASKETS</b>	0
<b>DIVIDER</b>	0
<b>SHELVES</b>	0
<b>WATER DRAIN</b>	No
<b>THERMOMETER</b>	Yes - Analog
<b>LOCK</b>	Yes

COMPONENTS	
<b>COMPRESSOR</b>	Embraco
<b>CONDENSER</b>	Ventilated
<b>THERMOSTAT</b>	Danfoss - Analog
<b>REFRIGERANT</b>	R290
<b>EVAPORATOR</b>	Hidden
<b>LIGHT</b>	-

PACKING LIST	
PACKING DIMENSIONS	
<b>HEIGHT</b>	N.A.
<b>DEPTH</b>	N.A.
<b>WIDTH</b>	N.A.
WEIGHT	
<b>EQUIPAMENT</b>	120 kG
<b>EQUIPAMENT + PACKGING</b>	N.A.

Approved by: Rui Ribeiro

07/04/2019

This leaflet is merely informative, subject to changes in technical data and typographical errors, and may not be used as a contractual document.

\*Temperature on steady state, at the load line, with empty and closed equipment, at the correspondent climatic class ambient conditions.

©All Rights Reserved

Document uncontrolled after issuance

\*\*Consumption up to 12 hours of continuous operation

EXPEDITION			
CAPACITY	20'	40'	45'   TRUCK
	5	24	26