

**2017**  
**2018**  
PRODUCTS



**FIND THE RIGHT  
PRODUCT FOR YOU...  
WITH ANDERSON!**



# TABLE OF CONTENTS

## SMARTMIX™ VERTICAL TMR MIXER

WHAT SETS US APART	6
A280 SINGLE AUGER VERTICAL TMR MIXER	10
A380 SINGLE AUGER VERTICAL TMR MIXER	11
A520 TWIN AUGER VERTICAL TMR MIXER	12
A700 TWIN AUGER VERTICAL TMR MIXER	13
A950 TRIPLE AUGER VERTICAL TMR MIXER	14
A1230 TRIPLE AUGER VERTICAL TMR MIXER	15
M600 TWIN AUGER SELF-PROPELLED TMR MIXER	16
M800 TWIN AUGER SELF-PROPELLED TMR MIXER	17

## BALE PROCESSORS

WHAT SETS US APART	20
PRO-CHOP 150	22

## SELF-LOADING BALE CARRIER

WHAT SETS US APART	26
STACKPRO7200 SQUARE BALE SELF-LOADING CARRIER AND STACKER	29
TRB1000 ROUND BALE SELF-LOADING CARRIER	30
TRB1400 ROUND BALE SELF-LOADING CARRIER	31
TRB2000 ROUND BALE SELF-LOADING CARRIER	32
TSR3450 SQUARE BALE SELF-LOADING CARRIER	33

## WRAPTOR™ ALL-IN-ONE

WHAT SETS US APART	36
WRAPTOR™	38

## INLINE BALE WRAPPERS

WHAT SETS US APART	42
NWS660	44
IFX660 XTRACTOR™	45
HYBRID X XTRACTOR™	46
EVOLUTION XTRACTOR™	47

## SINGLE BALE WRAPPERS

WHAT SETS US APART	50
RB200	53
RB400	54
RB500	55
RB580	56
RB600	57
RB680	58
780SB	59


## ACCESSORIES

BALE GRABBERS	61
---------------	----


## TECHNICAL SPECIFICATIONS

SMARTMIX™ (VERTICAL TMR MIXER)	64
BALE BLOWER	67
SELF-LOADING TRAILERS	68
BALE LOADING CAPACITY AND SPEED	69
INLINE WRAPPERS	70
INDIVIDUAL WRAPPERS	71
WRAPTOR™, TRAILER AND INLINE WRAPPER	72

# INNOVATION AT THE CORE OF OUR BUSINESS

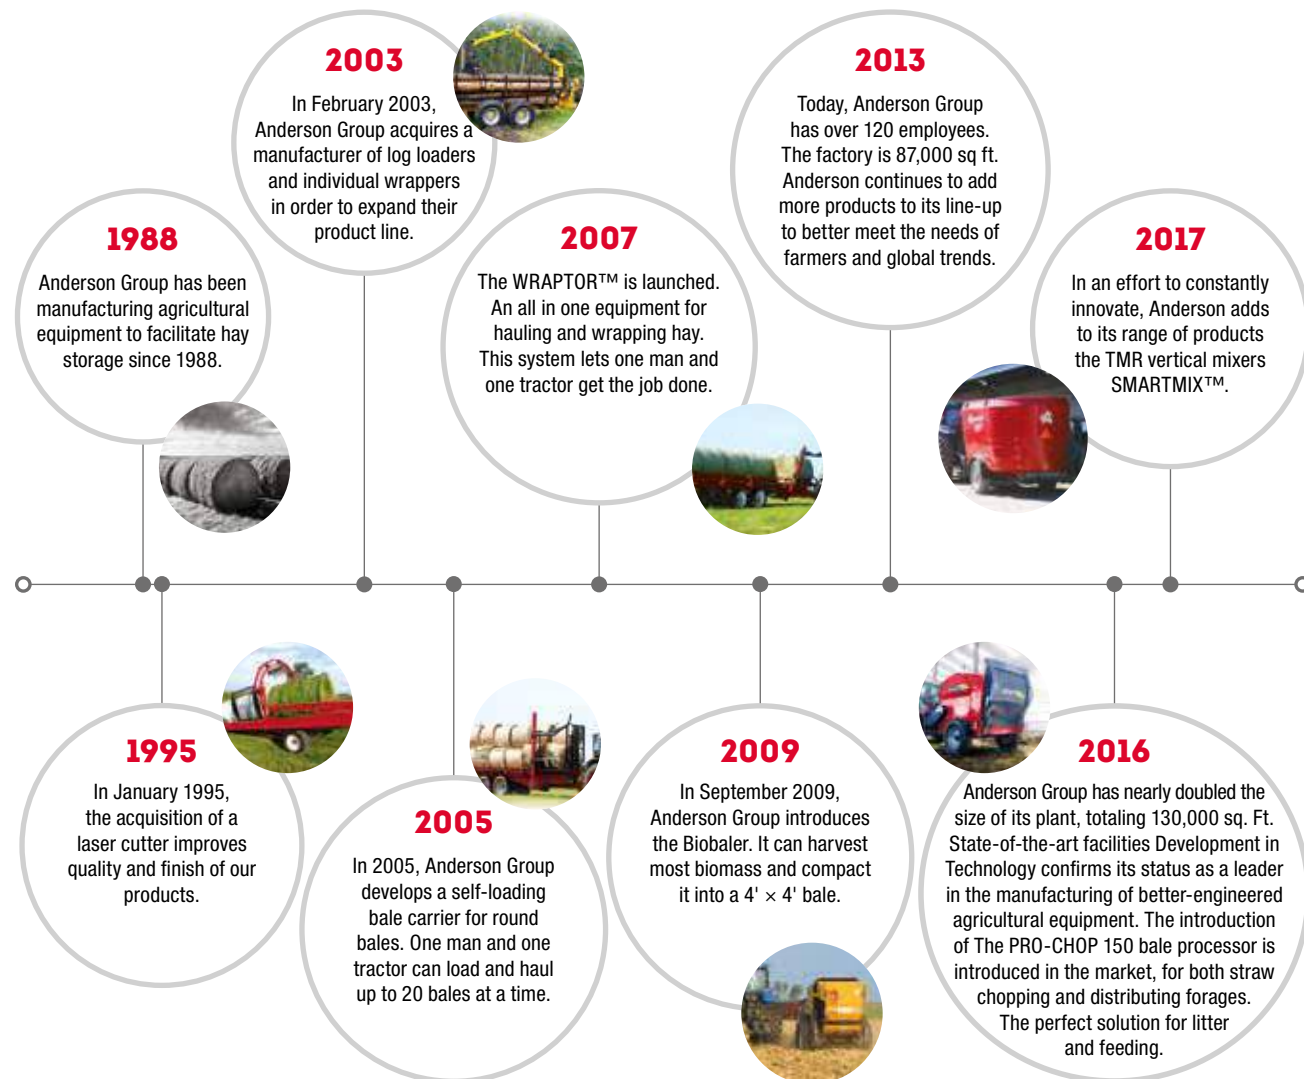


## ANDERSON WORLDWIDE

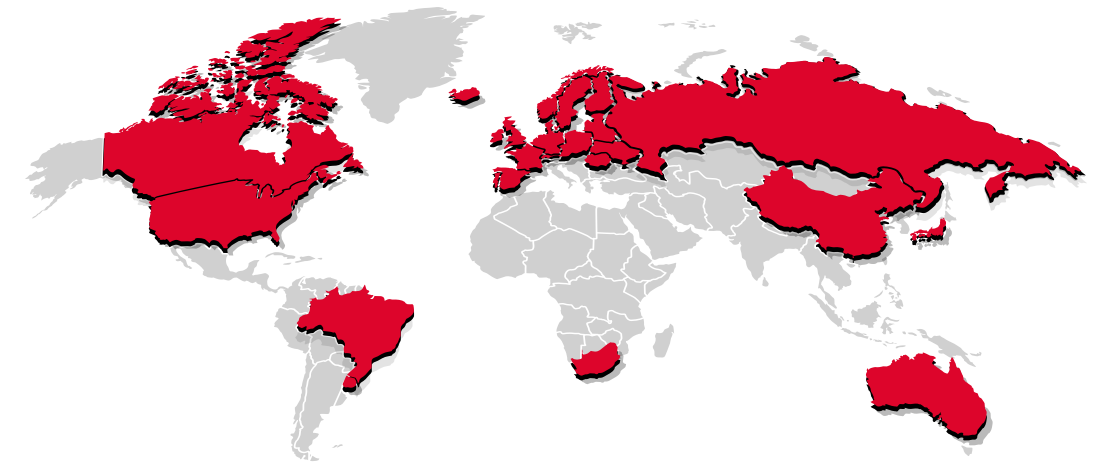

**ONLY ANDERSON OFFERS YOU BETTER-THOUGHT-OUT AGRICULTURAL SOLUTIONS TO DO MORE AND MORE EASILY.**

### COMPLETE SOLUTIONS FOR SMARTER FARMS:



**INNOVATIVE,  
RELIABLE AND  
HEAVY DUTY**



**SMARTMIX™**

# WHAT SETS US APART SMARTMIX™

SMARTMIX™

## DG500 INDICATOR



The universal programmable weighing computer (standard on all pulled type models) allows the storage of data as well as the programming of recipes and distribution sequences.

- The operator can edit the names of the components, distribution points and program in his own language.
- Programs can be placed by TOTAL or NUMBER OF COWS.
- The change of ALL WEIGHT or NUMBER OF COWS can be placed before the beginning of the execution, in order to have a program that is always in conformity with the needs of the animal.
- Possibility of programming 24 recipes, each with a maximum of 48 components and 48 distribution points.
- Compatible with DTM software.
- Dual LCD that allows a better user interface with clear operator messages.



## DTM SUITE SOFTWARE

DTM suite software is a feed management control system for your farm. It enables you to manage and control all feeding operations. Track history of loading and unloading including working time, acquire data about refusal for each group program components and recepies all that from your computer and transfer them to the mixer.

## SMART CONTROL

**SMART CONTROL** is a programmable wireless device for the management of the hydraulic and weighing functions of the TMR.

Optional on all Anderson pulled type models, this remote control allows to engage and display wirelessly the weighing system and control the hydraulic functions. During the loading phase the operator can use the SMART CONTROL on the loader to control in real time weight information: recipe/components/actual weight. During the feeding the SMART CONTROL can be used in the tractor. It is also possible to control wireless all hydraulic functions of the distribution phase: open/close discharge doors, activation of the belt. No more standing outside in the rain to setup your mix rations, you can now do it from the comfort of your tractor cab or even your home! All scale and hydraulic functionality at the palm of your hand.



## INDUSTRY'S FIRST HYDRAULICALLY CONTROLLED TRUE-CUT™, RESTRICTION BLADE SYSTEM

Anderson introduces the first ever wireless remote controlled hydraulic restriction blades. The hydraulic function allows the operator to engage and disengage the blades during the mixing process reducing overall mixing time up to 22% and more importantly, preserving the integrity of the ingredients like forages and corn silage. When fully engaged (8 inches) it speeds up long fiber processing by up to 50% (compared with when it is partially engaged) once the fiber is processed in accordance with the requirements of the recipe, the blades can be disengaged eliminating risks of over processing the other ingredients. Ensures full control of your cows assimilation of its feed = increasing milk production by 5% with same cost of feed.

## ADVANTAGES OF THE TRI-CUT™ AUGERS

Anderson's unique triangular position of the blade around the auger allows processing quickly any type of bales (even frozen) and speed-up the flow of material.

While being efficient on braking down bales, the spiral shaped augers 1, 2 or 3 depending on the model allow to pick up and elevate the material vertically, thus creating the "up and down" effect. The rotation of the auger gives the "front to back" effect in the cycle. This creates the best upward movement of the feed through the middle combined with the downward movement of the feed along the rolled tub wall creating the best mix every time.

## BENEFITS OF A ROLLED TUB

We designed our tubs with rolled walls (not bent) giving them the following advantages:



1. Better material flow in a rolled and smooth tank avoiding restriction around the auger. Therefore the feed naturally mixes and expansion effect is amplified.
2. The HP power required for a mix is reduced to a minimum. The flared and smooth shape makes for a homogeneous mixture faster.
3. The design of the walls being rolled naturally reinforces the tub giving it a longer life span.

Anderson tungsten reversible and adjustable cutting knives last about 3 times longer than major competitor with a rockwell of 45.

Carbide treated tungsten knives for longevity and self-sharpening properties.

Our cutting blades are also reinforced to avoid breaking in frozen conditions or when processing frozen bales giving you the best of both worlds = strength and longevity.

The 2 sweeping dispensers ensure a faster and more consistent discharge when mix is done and ready to be fed.



# THE PERFECT MIX

SMARTMIX™



1

Rolled sidewalls (not bent) for better flow of material, avoiding restriction around auger and naturally increase sturdiness.

2

Industry's first hydraulic TRUE-CUT™ restrictor blades gives the operator the ability to disengage the restrictor blade during the mixing process without leaving the tractor seat, preventing all risks of overprocessing feed, especially forages.

3

Reinforced tub floor provides longevity of the tub and also to the weighing load cells by equalizing the weight uniformly.

4

SMART CONTROL remote system is a portable wireless device for the integrated management of the hydraulic and weighing functions of the TMR (offered as an option).



5

Tungsten carbide knives that sharpen automatically.

TRI-CUT™ auger with 2-position adjustable and reversible knives (10 standard) and 2 sweeping dispensers ensuring a 30% faster and more consistent discharge. The triangular position of the knives give flat edges to the auger, processing quickly bales and speeding up flow material around the auger.

6

The programmable weighing computer DG500 comes standard on all our pulled type models. It allows the storage and programming of data and distribution sequences.

7

Optional 2 speed gearbox available, allows to be used with smaller less powerful tractors.



8

Discharge options: side trap discharge, front conveyor, bi-directional conveyor, rear commodity door.

9

## THE IMPORTANCE OF THE GRADE OF STEEL USED IN MANUFACTURING OUR MIXERS

All Anderson mixers are manufactured from high abrasion resistant steel plates, which gives them great resistance to wear even over the years. The floor of the mixer is made of AR400 and its side walls are made of steel AR235.

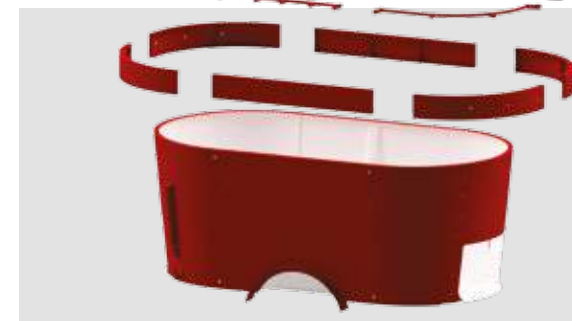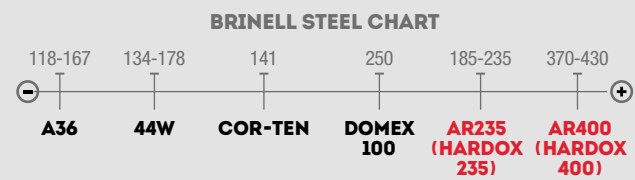

Extend tub wall longevity and capacity by reinforcing the complete structure with the steel capacity extensions (6", 12", 18") (A). Avoid rubber extension that crack and the replacement cost involved with them year after year. Also available, hay retention ring.

## A280

### SINGLE AUGER VERTICAL TMR MIXER

The Anderson A280 single auger mixers have been developed for farms where the footprint of the machines is an important factor. These mixers are compact and highly maneuverable. The rear axle has been integrated to offer overall a very low height and perfect maneuvering. These low tubs easily find their place on farms with low ceilings.



### FEATURES AND OPTIONS

1. Capacity 282 cu<sup>3</sup> to 367 cu<sup>3</sup>
2. Reinforced tub floor provides longevity of the tub and also to the load cells by equalizing the weight uniformly.
3. TRI-CUT™, auger with 2-position adjustable and reversible knives (10 standard) and 2 sweeping dispensers ensuring a 30% faster and more consistent discharge.
4. Side trap discharge designed with a sloped floor. Optional magnet can be installed as well. Side trap can also be equip with inclined conveyor.
5. Carbide treated self-sharpening tungsten knives.
6. Industry's first hydraulic TRUE-CUT™ restrictor blades allows the operator to engage and disengage during the mixing process preventing all risks of overprocessing feed.
7. The DG500 indicator is a universal, programmable weighing indicator for recipes, dispensing and data storage. It guarantees an extremely precise weighing thanks to the protected load cells and strategically located under the tank. Compatible with the DTM suite.
8. 3-point scale system.
9. Rolled side walls (not bent) for better flow of material, avoiding restriction around auger and naturally increased sturdiness.
10. SMART CONTROL remote control (optional) provides you full wireless control to: customize weighing system and recipe, hydraulics, speed of belt etc.

SMARTMIX™		A280
CAPACITY	Capacity – Without extension / with 6" / 12" / 18"	282 / 310 / 338 / 367 pi <sup>3</sup> 8 / 8,8 / 9,5 / 10,4 m <sup>3</sup>
	Total height – Without extension / with 6" / 12" / 18"	8' 1" / 8' 7" / 9' 1" / 9' 7" (2,47 m) / (2,64 m) / (2,8 m) / (2,9 m)
	Number of augers (10 adjustable and reversible knives/auger)	1
	PTO HP required (41 RPM on auger)	70 HP
	PTO HP required with 2 speed gearbox (27 RPM on auger)	N/A
Discharge options		Side trap
SPECIFICATIONS	PTO drive/input	540 RPM
	Metal thickness, tub floor (AR400 grade metal)*	5/8" (1,5 cm)
	Metal thickness, tub walls (AR235 grade metal)*	1/4" (0,6 cm)
	Metal thickness of the auger (AR400 grade metal)*	5/8" (1,5 cm)
	Weighing computer system	DG500 standard (SMART CONTROL optional)
TRUE-CUT™ restrictor blades		Standard

\* Details and technical specifications of the metal, see pages 8 and 9.



## A380

### SINGLE AUGER VERTICAL TMR MIXER

The Anderson pull type single auger A380 mixer will meet today's needs for high output and intensive use. It has been developed for farms where the footprint of the machine is an important factor. These mixers are compact and highly maneuverable.




### FEATURES AND OPTIONS

1. Capacity 380 pi<sup>3</sup> à 490 pi<sup>3</sup>.
2. Reinforced tub floor provides longevity of the tub and also to the load cells by equalizing the weight uniformly.
3. TRI-CUT™, auger with 2-position adjustable and reversible knives (10 standard) and 2 sweeping dispensers ensuring a 30% faster and more consistent discharge.
4. Discharge options: Side trap or front conveyor.
5. Carbide treated self-sharpening tungsten knives.
6. Industry's first hydraulic TRUE-CUT™ restrictor blades allows the operator to engage and disengage during the mixing process preventing all risks of overprocessing feed.
7. The DG500 indicator is a universal, programmable weighing indicator for recipes, dispensing and data storage. It guarantees an extremely precise weighing thanks to the protected load cells and strategically located under the tank. Compatible with the DTM suite.
8. 3-point scale system.
9. Rolled side walls (not bent) for better flow of material, avoiding restriction around auger and naturally increased sturdiness.
10. SMART CONTROL remote control (optional) provides you full wireless control to: customize weighing system and recipe, hydraulics, speed of belt etc.
11. Optional 2 speed gearbox.

SMARTMIX™		A380
CAPACITY	Capacity – Without extension / with 6" / 12" / 18"	380 / 416 / 453 / 490 pi <sup>3</sup> 10,8 / 11,8 / 12,8 / 13,8 m <sup>3</sup>
	Total height – Without extension / with 6" / 12" / 18"	8' 4" / 8' 10" / 9' 4" / 9' 10" (2,54 m) / (2,68 m) / (2,84 m) / (3 m)
	Number of augers (10 adjustable and reversible knives/auger)	1
	PTO HP required (41 RPM on auger)	85 HP
	PTO HP required with 2 speed gearbox (27 RPM on auger)	60 HP
Discharge options		Side trap or front conveyor
SPECIFICATIONS	PTO drive/input	540 RPM
	Metal thickness, tub floor (AR400 grade metal)*	5/8" (1,5 cm)
	Metal thickness, tub walls (AR235 grade metal)*	1/4" (0,6 cm)
	Metal thickness of the auger (AR400 grade metal)*	5/8" (1,5 cm)
	Weighing computer system	DG500 standard (SMART CONTROL optional)
TRUE-CUT™ restrictor blades		Standard

\* Details and technical specifications of the metal, see pages 8 and 9.

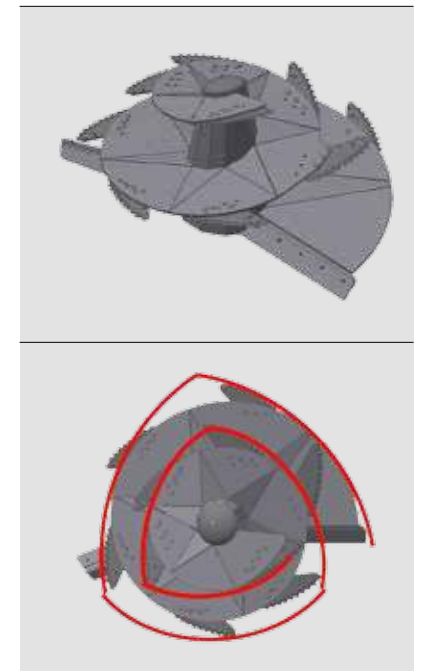



## A520

### TWIN AUGER VERTICAL TMR MIXER

The Anderson pull type A520 twin auger mixer has the ability to mix the widest variety of ingredients. Process large amount of hay, even complete square and round bales of baleage. Available with several discharge options. What ever you rations are designed to increase milk production of dairy cows or minimize variation in feed for each group you feed, vertical mixer will help optimize the dry matter and nutrient intake of your herd.




### FEATURES AND OPTIONS

1. Capacity 520 pi<sup>3</sup> à 666 pi<sup>3</sup>.
2. Reinforced tub floor provides longevity of the tub and also to the load cells by equalizing the weight uniformly.
3. TRI-CUT™, auger with 2-position adjustable and reversible knives (10 standard) and 2 sweeping dispensers ensuring a 30% faster and more consistent discharge.
4. Discharge options: Side trap or front conveyor.
5. Carbide treated self-sharpening tungsten knives.
6. Industry's first hydraulic TRUE-CUT™ restrictor blades allows the operator to engage and disengage during the mixing process preventing all risks of overprocessing feed.
7. The DG500 indicator is a universal, programmable weighing indicator for recipes, dispensing and data storage. It guarantees an extremely precise weighing thanks to the protected load cells and strategically located under the tank. Compatible with the DTM suite.
8. 3-point scale system.
9. Rolled side walls (not bent) for better flow of material, avoiding restriction around auger and naturally increased sturdiness.
10. SMART CONTROL remote control (optional) provides you full wireless control to: customize weighing system and recipe, hydraulics, speed of belt etc.
11. Optional 2 speed gearbox.

## A700

### TWIN AUGER VERTICAL TMR MIXER

The pull type twin auger A700 mixer is designed for intensive daily use. These mixers are adaptable depending on the configuration of the operation and the type of farming. The solution for every size farm.

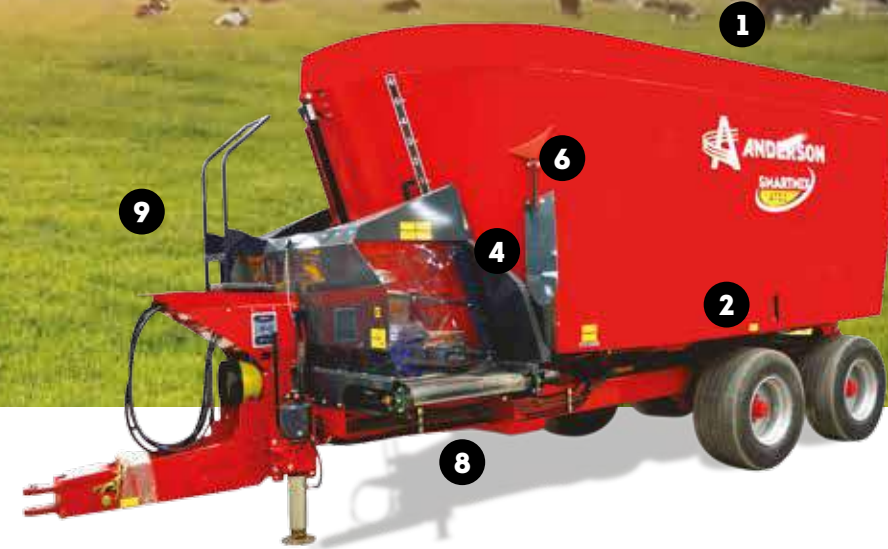

### FEATURES AND OPTIONS

1. Capacity 695 pi<sup>3</sup> à 897 pi<sup>3</sup>.
2. Reinforced tub floor provides longevity of the tub and also to the load cells by equalizing the weight uniformly.
3. TRI-CUT™, auger with 2-position adjustable and reversible knives (10 standard) and 2 sweeping dispensers ensuring a 30% faster and more consistent discharge.
4. Discharge options: Side trap or front conveyor.
5. Carbide treated self-sharpening tungsten knives.
6. Industry's first hydraulic TRUE-CUT™ restrictor blades allows the operator to engage and disengage during the mixing process preventing all risks of overprocessing feed.
7. The DG500 indicator is a universal, programmable weighing indicator for recipes, dispensing and data storage. It guarantees an extremely precise weighing thanks to the protected load cells and strategically located under the tank. Compatible with the DTM suite.
8. 4-point scale system.
9. Rolled side walls (not bent) for better flow of material, avoiding restriction around auger and naturally increased sturdiness.
10. SMART CONTROL remote control (optional) provides you full wireless control to: customize weighing system and recipe, hydraulics, speed of belt etc.
11. Optional 2 speed gearbox.


	SMARTMIX™	A520
<b>CAPACITY</b>	Capacity – Without extension / with 6" / 12" / 18"	520 / 568 / 617 / 666 pi <sup>3</sup> 14,7 / 16 / 17,5 / 18,8 m <sup>3</sup>
	Total height – Without extension / with 6" / 12" / 18"	8' 6" / 9' / 9' 6" / 10' (2,59 m) / (2,74 m) / (2,89 m) / (3 m)
	Number of augers (10 adjustable and reversible knives/auger)	2
	PTO HP required (41 RPM on auger)	100 HP
	PTO HP required with 2 speed gearbox (27 RPM on auger)	65 HP
	Discharge options	Side trap or front conveyor
<b>SPECIFICATIONS</b>	PTO drive/input	540 RPM
	Metal thickness, tub floor (AR400 grade metal)*	5/8" (1,5 cm)
	Metal thickness, tub walls (AR235 grade metal)*	1/4" (0,6 cm)
	Metal thickness of the auger (AR400 grade metal)*	5/8" (1,5 cm)
	Weighing computer system	DG500 standard (SMART CONTROL optional)
	TRUE-CUT™ restrictor blades	Standard



\* Details and technical specifications of the metal, see pages 8 and 9.

	SMARTMIX™	A700
<b>CAPACITY</b>	Capacity – Without extension / with 6" / 12" / 18"	695 / 762 / 829 / 897 pi <sup>3</sup> 19,7 / 21,6 / 23,5 / 25,4 m <sup>3</sup>
	Total height – Without extension / with 6" / 12" / 18"	9' 2" / 9' 8" / 10' 2" / 10' 8" (2,8 m) / (2,95 m) / (3,01 m) / (3,25 m)
	Number of augers (10 adjustable and reversible knives/auger)	2
	PTO HP required (41 RPM on auger)	120 HP
	PTO HP required with 2 speed gearbox (27 RPM on auger)	85 HP
	Discharge options	Side trap or front conveyor
<b>SPECIFICATIONS</b>	PTO drive/input	540 RPM / 1000 RPM
	Metal thickness, tub floor (AR400 grade metal)*	3/4" (1,9 cm)
	Metal thickness, tub walls (AR235 grade metal)*	1/4" (0,6 cm)
	Metal thickness of the auger (AR400 grade metal)*	5/8" (1,5 cm)
	Weighing computer system	DG500 standard (SMART CONTROL optional)
	TRUE-CUT™ restrictor blades	Standard

\* Details and technical specifications of the metal, see pages 8 and 9.

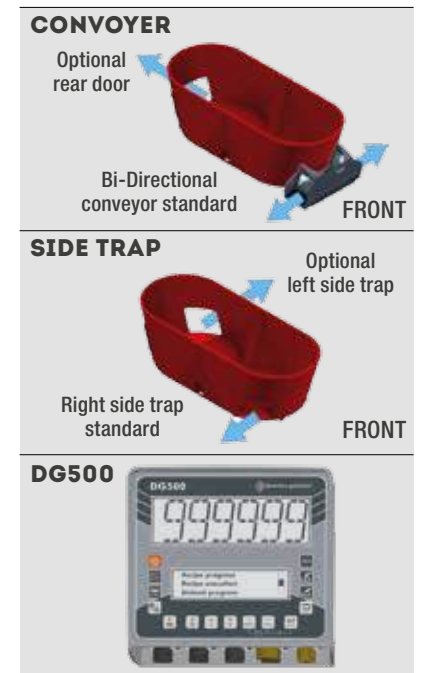

## A950

### TRIPLE AUGER VERTICAL TMR MIXER

Anderson knows it is with high quality raw materials that we manage to achieve nutritional goals and high production. The mixing rate should be adapted to avoid any risk of over heating and grinding that could lead to diminished efficiency of the TMR. The pull type A950 triple auger mixer becomes an ideal solution with their distribution conveyor ideal for fibrous rations. The cross conveyor ensures even and prompt distribution to the left or right regardless of the prepared ration.



### FEATURES AND OPTIONS

1. Capacity 953 pi<sup>3</sup> à 1 212 pi<sup>3</sup>.
2. Reinforced tub floor provides longevity of the tub and also to the load cells by equalizing the weight uniformly.
3. TRI-CUT™, auger with 2-position adjustable and reversible knives (10 standard) and 2 sweeping dispensers ensuring a 30% faster and more consistent discharge.
4. Discharge options: front conveyor, rear trap optional.
5. Carbide treated self-sharpening tungsten knives.
6. Industry's first hydraulic TRUE-CUT™ restrictor blades allows the operator to engage and disengage during the mixing process preventing all risks of overprocessing feed.
7. The DG500 indicator is a universal, programmable weighing indicator for recipes, dispensing and data storage. It guarantees an extremely precise weighing thanks to the protected load cells and strategically located under the tank. Compatible with the DTM suite.
8. 6-point scale system.
9. Rolled side walls (not bent) for better flow of material, avoiding restriction around auger and naturally increased sturdiness.
10. SMART CONTROL remote control (optional) provides you full wireless control to: customize weighing system and recipe, hydraulics, speed of belt etc.
11. Standard 2 speed gearbox.

## A1230

### TRIPLE AUGER VERTICAL TMR MIXER

The pull type A1230 triple auger mixer become a perfect solution with their distribution conveyor ideal for fibrous rations. The cross conveyor ensures even and prompt distribution to the left or right regardless of the prepared ration. Anderson knows it is with high quality raw materials that we manage to achieve nutritional goals and high production. The mixing rate should be adapted to avoid any risk of overheating and grinding that could lead to diminished efficiency of the TMR.



### FEATURES AND OPTIONS

1. Capacity 1 236 pi<sup>3</sup> à 1 575 pi<sup>3</sup>.
2. Reinforced tub floor provides longevity of the tub and also to the load cells by equalizing the weight uniformly.
3. TRI-CUT™, auger with 2-position adjustable and reversible knives (10 standard) and 2 sweeping dispensers ensuring a 30% faster and more consistent discharge.
4. Discharge options: front conveyor
5. Carbide treated self-sharpening tungsten knives.
6. Industry's first hydraulic TRUE-CUT™ restrictor blades allows the operator to engage and disengage during the mixing process preventing all risks of overprocessing feed.
7. The DG500 indicator is a universal, programmable weighing indicator for recipes, dispensing and data storage. It guarantees an extremely precise weighing thanks to the protected load cells and strategically located under the tank. Compatible with the DTM suite.
8. 6-point scale system.
9. Rolled side walls (not bent) for better flow of material, avoiding restriction around auger and naturally increased sturdiness.
10. SMART CONTROL remote control (optional) provides you full wireless control to: customize weighing system and recipe, hydraulics, speed of belt etc.
11. Standard 2 speed gearbox.

SMARTMIX™		A950
CAPACITY	Capacity – Without extension / with 6" / 12" / 18"	953 / 1038 / 1125 / 1212 pi <sup>3</sup> 27 / 29,4 / 31,9 / 34,3 m <sup>3</sup>
	Total height – Without extension / with 6" / 12" / 18"	9' 9" / 10' 3" / 10' 9" / 11' 3" (2,97 m) / (3,12 m) / (3,27 m) / (3,42)
	Number of augers (10 adjustable and reversible knives/auger)	3
	PTO HP required (41 RPM on auger)	145 HP
	PTO HP required with 2 speed gearbox (27 RPM on auger)	95 HP
	Discharge options	Rear trap or front conveyor
SPECIFICATIONS	PTO drive/input	1000 RPM
	Metal thickness, tub floor (AR400 grade metal)*	3/4" (1,9 cm)
	Metal thickness, tub walls (AR235 grade metal)*	1/4" (0,6 cm)
	Metal thickness of the auger (AR400 grade metal)*	5/8" (1,5 cm)
	Weighing computer system	DG500 standard (SMART CONTROL optional)
	TRUE-CUT™ restrictor blades	Standard

\* Details and technical specifications of the metal, see pages 8 and 9.



SMARTMIX™		A1230
CAPACITY	Capacity – Without extension / with 6" / 12" / 18"	1236 / 1348 / 1461 / 1575 pi <sup>3</sup> 35 / 38,2 / 41,4 / 44,6 m <sup>3</sup>
	Total height – Without extension / with 6" / 12" / 18"	9' 9" / 10' 3" / 10' 9" / 11' 3" (2,97 m) / (3,12 m) / (3,27 m) / (3,42)
	Number of augers (10 adjustable and reversible knives/auger)	3
	PTO HP required (41 RPM on auger)	180 HP
	PTO HP required with 2 speed gearbox (27 RPM on auger)	125 HP
	Discharge options	Front conveyor
SPECIFICATIONS	PTO drive/input	1000 RPM
	Metal thickness, tub floor (AR400 grade metal)*	3/4" (1,9 cm)
	Metal thickness, tub walls (AR235 grade metal)*	1/4" (0,6 cm)
	Metal thickness of the auger (AR400 grade metal)*	5/8" (1,5 cm)
	Weighing computer system	DG500 standard (SMART CONTROL optional)
	TRUE-CUT™ restrictor blades	Standard

\* Details and technical specifications of the metal, see pages 8 and 9.



## M600

### TWIN AUGER SELF-PROPELLED TMR MIXER

Anderson's self-propelled and self-loading M600 mixers have been developed to save time when feeding large herds. These models perform a number of functions including loading and mixing different ingredients and finally distributing the rations accurately using a built-in weighing system. The M600 is a machine powered by a Deutz 6 cylinder engine and automatically driven via hydrostatic traction by the two gear motors placed on the rear wheels.



### FEATURES AND OPTIONS

1. Capacity 600 pi<sup>3</sup>.
2. Reinforced tub floor provides longevity of the tub and also to the load cells by equalizing the weight uniformly.
3. TRI-CUT™, auger with 2-position adjustable and reversible knives (10 standard) and 2 sweeping dispensers ensuring a 30% faster and more consistent discharge.
4. Discharge options: rear conveyor.
5. Deutz 217 HP 6 cylinder engine tier IV final.
6. Industry's first hydraulic TRUE-CUT™ restrictor blades allows the operator to engage and disengage during the mixing process preventing all risks of overprocessing feed.
7. Milling head cutting width 6' 6" (2 m).

8. 4-point scale system.
9. Rolled side walls (not bent) for better flow of material, avoiding restriction around auger and naturally increased sturdiness.

SMARTMIX™		M600
CAPACITY	Capacity of the tub – Including 12" extension	600 pi <sup>3</sup>
	Total height	10' 5" (3 m)
	Number of augers (10 adjustable and reversible knives/auger)	2
	Engine	Deutz 217 HP 6 cylinders
	Discharge options	Rear conveyor
SPECIFICATIONS	Hydrostatic drive	Standard
	Touch screen in-cab controls	Standard
	TRUE-CUT™ restrictor blades	Standard



## M800

### TWIN AUGER SELF-PROPELLED TMR MIXER

Thanks to the speed and ease of operating of the twin auger self-propelled M800 is perfectly suited for large dairy or cattle farms who are looking for a high-precision, efficient method of feeding. Equipped with latest generation Deutz Tier IV final engines, these self-propelled mixers are known to have low fuel consumption.



### FEATURES AND OPTIONS

1. Capacity 822 pi<sup>3</sup>.
2. Reinforced tub floor provides longevity of the tub and also to the load cells by equalizing the weight uniformly.
3. TRI-CUT™, auger with 2-position adjustable and reversible knives (10 standard) and 2 sweeping dispensers ensuring a 30% faster and more consistent discharge.
4. Discharge options: rear conveyor.
5. Deutz 245 HP 6 cylinder engine tier IV final.
6. Industry's first hydraulic TRUE-CUT™ restrictor blades allows the operator to engage and disengage during the mixing process preventing all risks of overprocessing feed.
7. Easy access to the engine and important parts for maintenance.
8. 4-point scale system.
9. Rolled side walls (not bent) for better flow of material, avoiding restriction around auger and naturally increased sturdiness.
10. Milling head cutting width 6' 6" (2 m).

SMARTMIX™		M800
CAPACITY	Capacity of the tub – Including 12" extension	822 pi <sup>3</sup>
	Total height	9' 7" (2,7 m)
	Number of augers (10 adjustable and reversible knives/auger)	2
	Engine	Deutz 245 HP 6 cylinders
	Discharge options	Rear conveyor
SPECIFICATIONS	Hydrostatic drive	Standard
	Touch screen in-cab controls	Standard
	TRUE-CUT™ restrictor blades	Standard



# QUICK AND EASY DISTRIBUTION



**BALE PROCESSOR**

# WHAT SETS US APART PRO-CHOP 150

## BALE PROCESSOR

### EVEN MORE CONTROL

New electric controls of the rear loading door were installed on this year's model. These controls allow the user to operate the conveyor as well as to open and close the door. Useful when a bale is not placed properly or to remove the net or string from the bale at the beginning of the process. It can all be done directly next to the machine.



### UNMATCHED VISION

The inside camera allows the operator to see the bales on the conveyor, the rotor and the loading. The new rearview cameras offer a perfect view of the loading process.




### BETTER DISTRIBUTION

The chute makes the distribution in troughs near the machine very precise and comfortable. It allows spreading up to 60 feet on the right and 40 feet on the left. For bedding, livestock is cleaner and healthier and the straw is finely chopped to increase its absorbency to moisture. By improving the comfort of cows, the risks of mastitis and health problems are reduced. The speed and ease of making bedding also saves straw and time. Also it is easy to pretreat the straw for RTM mixers. Consumption is then increased and waste is reduced.



### BETTER CUT


The rotor is equipped with 264 heavy duty knives that can shred round or square bales of silage, hay or straw. Even frozen bales will have no problem being processed. Its diameter ensures constant flow.

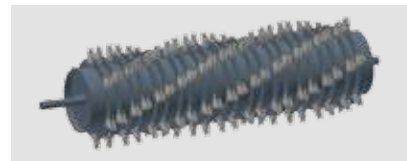

### HIGH LOADING CAPACITY

The 5' chamber is suitable for use with all bale sizes.

- Capacity of 2 bales (1 X 6' round, 2 X 5' round and square bales up to 4' X 4' X 8') reducing the risk of overflow.
- Load the bales with the rear door using the camera.
- Possibility of having 2 bales at the same time. The loading door allows a bale to sit on the door while the other is getting processed inside.

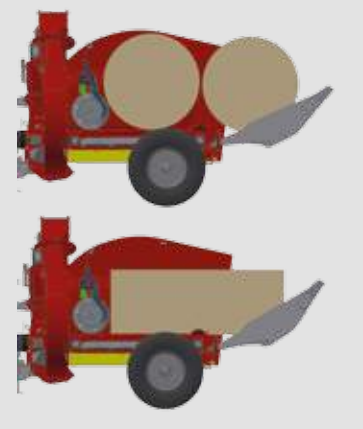



### SETTINGS WITHOUT TOOLS

4 possible settings: change settings without tools in less than 15 seconds.

1. NEW more aggressive rotor with 22 discs and 264 knives for more effective processing.
2. The top gate when engaged will be used to help chop down fiber more efficiently. On the other hand when disengaged it will allow material to go through without cutting it leaving it pretty much intact.
3. Counter knife setting is always used along with the top gate to chop down finer material.
4. The removable recutter screen is used ONLY when processing straw. The screen with its 2 inch holes, will prevent longer fiber of straw to go through and will be forced back into the knives's path and be cut.
5. The comb is part of the rotor and allows the bales to be perfectly fed through the rotor. Prevents the bales to come in too quickly and creating plugging.
6. Showing the counter knife disengaged.
7. Showing the top gate disengaged.

### BETTER EQUIPPED

The PRO-CHOP 150 is equipped with a clean out under the frame at the back of the machine, allowing to clean foreign bodies or other debris. Can also be opened for cleaning residual buildup without removing the fan or opening the machine.

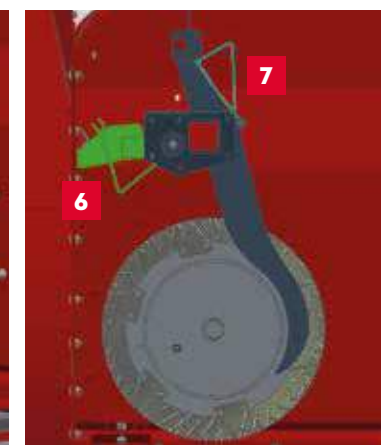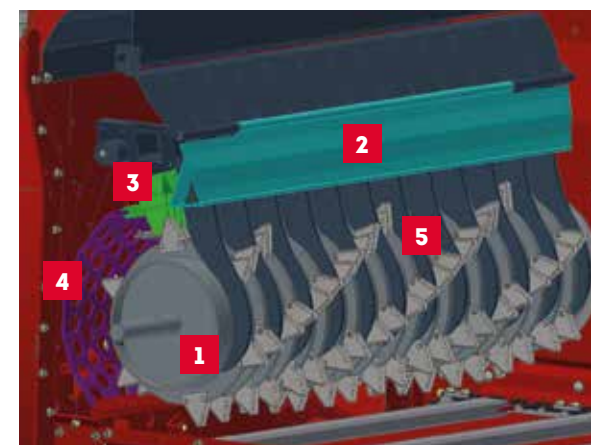

## PRO-CHOP 150 BALE PROCESSOR

The PRO-CHOP 150 is a bale feeder and chopper that provide an ideal bedding or feeding solution for bales of hay, straw, silage. The Anderson improved model is now the only model on the market able to process different material in different length: Haylage - full length down to 5", Hay - full length down to 3", Straw - full length down to 1". Perfect for processing round and square bales.



### FEATURES AND OPTIONS

1. NEW more aggressive rotor with 22 discs and 264 knives for more effective processing.
2. The top gate when engaged will be used to help chop down fiber more efficiently. On the other hand when disengaged it will allow material to go through without cutting it leaving it pretty much intact. Counter knife setting is always used along with the top gate to chop down finer material.
3. The removable recutter screen is used ONLY when processing straw. The screen with its 2 inches wholes, will prevent longer fiber of straw to go through and will be forced back into the knives's path and be cut.
4. The comb is part of the rotor and allows the bales to be perfectly fed through the rotor. Prevents the bales to come in too quickly and creating blocages.

5. 68 inches Blower made with steel AR400 ensuring the best quality and resistance to wear. Side wall fan in steel AR400 also.
6. Large wheels for muddy terrain.



BALE PROCESSOR		PRO-CHOP 150
CAPACITY	Type of bale	Straw-hay-baleage
	Round bale capacity	1 bale up to 6' x 5' long (1,9 m x 1,5 m) or 2 bales up to 5' x 5' long (1,5 m x 1,5 m)
	Square bale capacity	4' x 4' x 9' (1,2 m x 1,3 m x 2,8 m)
	Maximum spreading distance	Up to 60' (18 m) on the right Up to 40' (12 m) on the left
	Chute rotation	270 degrees
SPECIFICATIONS	Controls	Electrical
	Number of knives	264
	Number of discs on the rotor	22
	Number of cameras	2
	Manual control of the rear door	Electrical
	Metal thickness of the fan	1/4" (0,6 cm) AR400
	Required PTO	540 RPM
	PTO HP required	70 HP

\* Details and technical specifications, see pages 20 and 21.

# BEDDING AND FEEDING AT ITS BEST



**WORKING  
AS HARD  
AS YOU DO**



**SELF-LOADING  
BALE CARRIERS**

# WHAT SETS US APART SELF-LOADING BALE CARRIERS

## SELF-LOADING BALE CARRIERS

### DO MORE WITH ONE TRACTOR AND ONE OPERATOR!

#### EASY LOADING

The TSR3450 self-loading arm allows 19 square bales to be picked up and can easily be adjusted to fit different bales sizes. The round tubular self-loading arm of the TRB series is designed to quickly collect round bales of silage and dry hay while protecting the net. No tears or broken net or twine. The loading arm has been designed to be able to follow the path of the baler for fast, nonstop loading, saving field loading time and picking up an extra load of bales. The arm as well as the sides of the platform are adjustable to fit your type of bales. Power and maneuverability provide Anderson trailers with unmatched efficiency.

#### TSR3450



#### TRB SERIES



#### HIGH FLOTATION TIRES

High flotation tires reduce compaction while providing safe transport of wet or dry bales.



#### EFFORTLESS UNLOADING

The hydraulic unloading system is made by tilting the platform and accurately and gently deposits the bales on the ground. The bales are left on the ground linearly and perfectly positioned to facilitate their subsequent wrapping.



#### EFFICIENCY AND SPEED

These heavy-duty self-loading trailers are designed to pick up and transport wet or dry hay, allowing you to be faster and more efficient in the field. The hydraulic bale receiving platform makes it possible to position them perfectly on the trailer and to maximize the quantity transported. With its manufacturing profile, the operator maintains optimum visibility of its load even on rough terrain. Models available with or without brakes.







#### OPTIMAL PERFORMANCE

Accurate steering and a full load indicator allow you to continue working efficiently for many hours. The tandem axle provides stable and optimum machine performance. The Stackpro7200 allows 90 degree unloading (stacking) of square bales.



#### BALES MOVED PER HOUR AND CYCLE TIME


##### COMPARING STANDARD SYSTEM AND ANDERSON'S TRB SERIES SELF-LOADING BALE MOVERS

		STANDARD	WITH A TRB1000	WITH A TRB1400	WITH A TRB2000
					
		1 tractor - 1 operator 2 wagons of 10 round bales each	1 tractor - 1 operator 1 self-loading trailer 10 round bales	1 tractor - 1 operator 1 self-loading trailer 14 round bales	1 tractor - 1 operator 1 self-loading trailer 20 round bales
DISTANCE FROM FIELD TO STORAGE LOCATION	1 mile (1,6 km)	39	50	62	75
	2 miles (3,2 km)	32	31	40	51
	3 miles (4,8 km)	26	23	30	40
	4 miles (6,4 km)	23	18	24	32
	5 miles (8 km)	20	15	20	27
TIME	Travel to field	3 min.	3 min.	3 min.	3 min.
	Loading bales	20 min.	4 min.	6 min.	8 min.
	Return to storage site	4,3 min.	4,3 min.	4,3 min.	4,3 min.
	Unloading	3,3 min.	0,5 min.	0,5 min.	0,5 min.
	<b>TOTAL CYCLE TIME</b>	<b>30,6 min./mile</b>	<b>11,8 min./mile</b>	<b>13,8 min./mile</b>	<b>15,8 min./mile</b>

INFO USED FOR CALCULATION: Travel speed with empty load on carrying unit: 20 miles/h (32 km/h) - Travel speed with full load on carrying unit: 14 miles/h (22 km/h)



# A FORCE IN NATURE

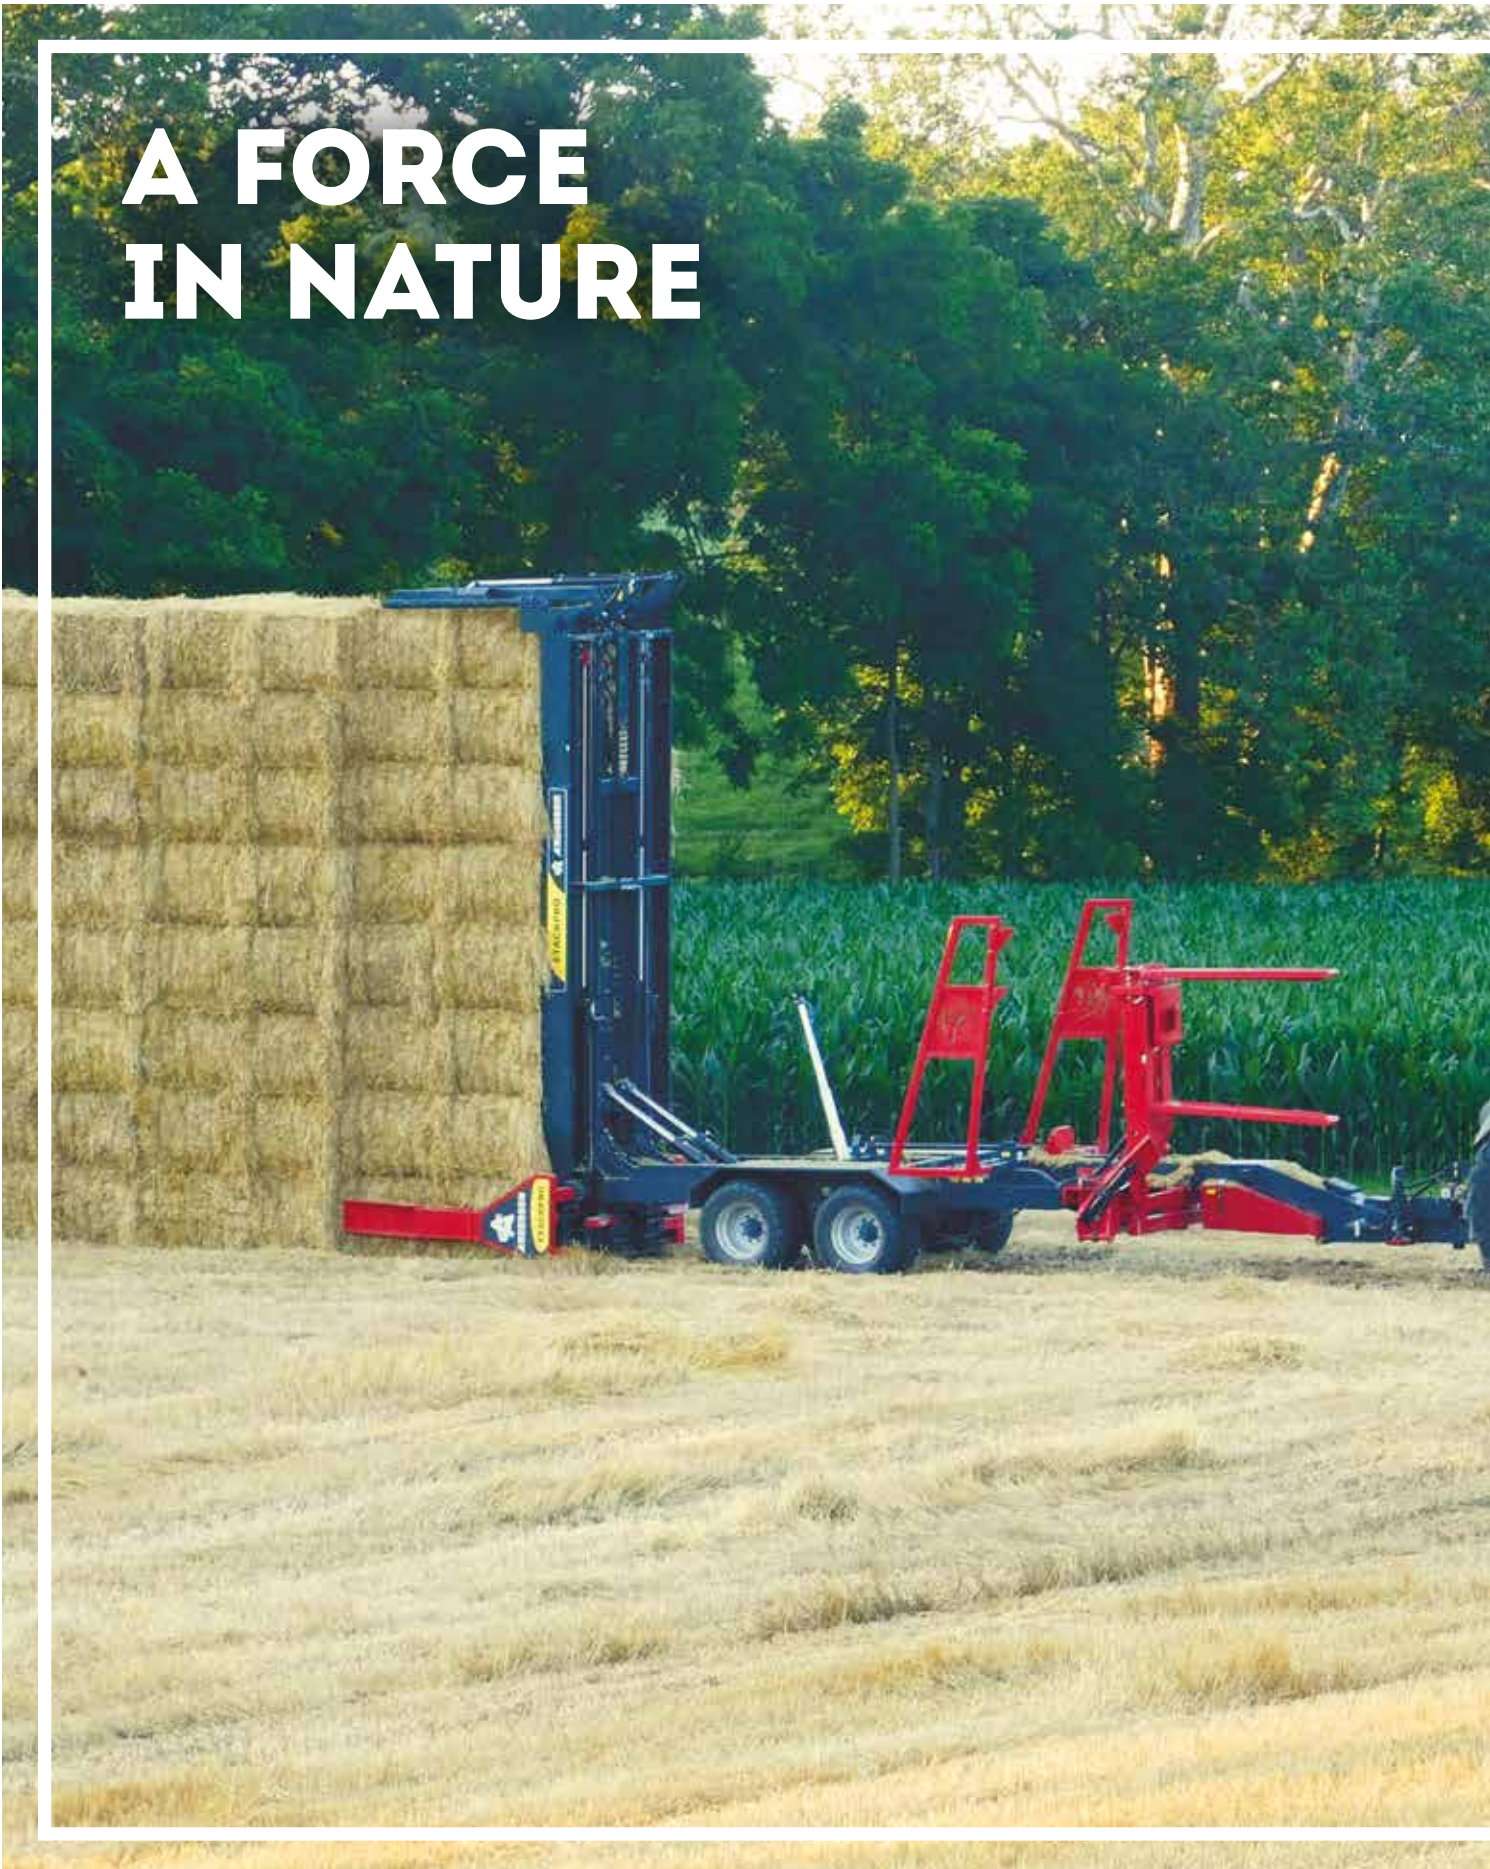

## STACKPRO7200 SQUARE BALE SELF-LOADING CARRIER AND STACKER

The Stackpro7200 is an innovative system that incorporates square bale collecting and stacking for farmers who are conscious about saving time in the logistics of their bales all year round. The Stackpro7200's rugged design is built to handle almost all bale types and bale sizes. The Stackpro7200's high speed and smooth transitions allows to easily carry and stack bales.



### FEATURES AND OPTIONS

1. Tandem axle for stable and optimal performance of the machine.
2. Designed with lubrication-free pivot system for moving parts, the Stackpro7200 is virtually maintenance free.
3. Two rear clamps support the complete weight of the load when lowering down the stack and retrieving bales.
4. Unique adjustable self-loading heavy duty clamp capable of handling bales up to 1100 kg (2400 lbs) without damaging twine.
5. Fully electronically control panel, weighs bales and total load.
6. High floatation tires.
7. Rugged frame and steel bed supporting wet and dry bales.
8. Hydraulic unloading and stacking system.



	SQUARE BALE CARRIER	STACKPRO7200
<b>CAPACITY</b>	Tractor minimum HP requirements	175 HP
	Square bale 3' x 3' x 8' long (90 cm x 90 cm x 2,4 m)	27
	Square bale 4' x 3' x 8' long (1,2 m x 90 cm x 2,4 m)	16
	Square bale 4' x 4' x 8' long (1,2 m x 1,2 m x 2,4 m)	12
<b>SPECIFICATIONS</b>	Bales transported per hour on a distance of 0,62 mile (1 km)	3' x 3' / 4' x 3' / 106 / 78
	Bales transported per hour on a distance of 1,24 mile (2 km)	3' x 3' / 4' x 3' / 85 / 60
	Bales transported per hour on a distance of 1,86 mile (3 km)	3' x 3' / 4' x 3' / 71 / 49
	Bales transported per hour on a distance of 2,48 miles (4 km)	3' x 3' / 4' x 3' / 61 / 41
	Bales transported per hour on a distance of 3,10 miles (5 km)	3' x 3' / 4' x 3' / 53 / 35
	Tires	550 / 45-22,5
	Maximum speed with a load of 25 000 lbs	30 km per hour
Maximum speed with a load of 21 000 lbs	45 km per hour	



## TRB1000

SELF-LOADING ROUND BALE CARRIER

These self-loading trailers are designed to collect up to 10 round bales of wet or dry hay in a simpler and faster way. Reliable durability and optimum machine handling offers unmatched efficiency in the field.



### FEATURES AND OPTIONS

- 1. High floatation tires.
- 2. Adjustable self-loading arm tubular round-shaped designed for bale net protection.
- 3. Hydraulic unloading system.
- 4. Hydraulic push off system.
- 5. Full charge indicator.
- 6. Tandem axle.
- 7. Rugged frame to support wet bales.



ROUND BALE CARRIER		TRB1000
<b>CAPACITY</b>	Tractor minimum HP requirements	100 HP*
	Round bale 4' x 4' diameter (1,2 m x 1,2 m)	10
	Round bale 4' x 5' diameter (1,2 m x 1,5 m)	10
	Round bale 4' x 5' 6" diameter (1,2 m x 1,6 m)	10**
	Round bale 5' x 5" diameter (1,5 m x 1,5 m)	8
	Round bale 5' x 5' 6" diameter (1,5 m x 1,6 m)	8**
<b>SPECIFICATIONS</b>	Bales transported per hour on a distance of 0,62 mile (1 km)	55
	Bales transported per hour on a distance of 1,24 mile (2 km)	36
	Bales transported per hour on a distance of 1,86 mile (3 km)	26
	Bales transported per hour on a distance of 2,48 miles (4 km)	21
	Bales transported per hour on a distance of 3,10 miles (5 km)	17
	Tires	400 / 60-22,5
	Maximum speed with a load of 25 000 lbs	30 km per hour
Maximum speed with a load of 21 000 lbs	45 km per hour	

\* Based on flat terrain  
\*\* Must be equipped with T3-ELARG (ELARG-10)

## TRB1400

SELF-LOADING ROUND BALE CARRIER

These self-loading trailers are designed to collect up to 14 round bales of wet or dry hay in a simpler and faster way. Reliable durability and optimum machine handling offers unmatched efficiency in the field.



### FEATURES AND OPTIONS

- 1. High floatation tires.
- 2. Adjustable self-loading arm tubular round-shaped designed for bale net protection.
- 3. Hydraulic unloading system.
- 4. Hydraulic push off system.
- 5. Full charge indicator.
- 6. Tandem axle.
- 7. Rugged frame to support wet bales.



ROUND BALE CARRIER		TRB1400
<b>CAPACITY</b>	Tractor minimum HP requirements	100 HP*
	Round bale 4' x 4' diameter (1,2 m x 1,2 m)	14
	Round bale 4' x 5' diameter (1,2 m x 1,5 m)	14
	Round bale 4' x 5' 6" diameter (1,2 m x 1,6 m)	14**
	Round bale 5' x 5" diameter (1,5 m x 1,5 m)	12***
	Round bale 5' x 5' 6" diameter (1,5 m x 1,6 m)	12**/***
<b>SPECIFICATIONS</b>	Bales transported per hour on a distance of 0,62 mile (1 km)	65
	Bales transported per hour on a distance of 1,24 mile (2 km)	45
	Bales transported per hour on a distance of 1,86 mile (3 km)	34
	Bales transported per hour on a distance of 2,48 miles (4 km)	27
	Bales transported per hour on a distance of 3,10 miles (5 km)	23
	Tires	550 / 45-22,5
	Maximum speed with a load of 25 000 lbs	30 km per hour
Maximum speed with a load of 21 000 lbs	45 km per hour	

\* Based on flat terrain  
\*\* Must be equipped with T3-ELARG (ELARG-10)  
\*\*\* Must be equipped with T2-X72F

## TRB2000

### SELF-LOADING ROUND BALE CARRIER

These self-loading trailers are designed to collect up to 20 round bales of wet or dry hay in a simpler and faster way. Reliable durability and optimum machine handling offers unmatched efficiency in the field.



### FEATURES AND OPTIONS

1. High floatation tires.
2. Adjustable self-loading arm tubular round-shaped designed for bale net protection.
3. Hydraulic unloading system.
4. Hydraulic push off system.
5. Full charge indicator.
6. Tandem axle.
7. Rugged frame to support wet bales.



	ROUND BALE CARRIER	TRB2000
<b>CAPACITY</b>	Tractor minimum HP requirements	130 HP*
	Round bale 4' x 4' diameter (1,2 m x 1,2 m)	20
	Round bale 4' x 5' diameter (1,2 m x 1,5 m)	20
	Round bale 4' x 5' 6" diameter (1,2 m x 1,6 m)	14
	Round bale 5' x 5" diameter (1,5 m x 1,5 m)	17
	Round bale 5' x 5' 6" diameter (1,5 m x 1,6 m)	12**
<b>SPECIFICATIONS</b>	Bales transported per hour on a distance of 0,62 mile (1 km)	75
	Bales transported per hour on a distance of 1,24 mile (2 km)	55
	Bales transported per hour on a distance of 1,86 mile (3 km)	43
	Bales transported per hour on a distance of 2,48 miles (4 km)	36
	Bales transported per hour on a distance of 3,10 miles (5 km)	30
	Tires	550 / 45-22,5
	Maximum speed with a load of 25 000 lbs	30 km per hour
Maximum speed with a load of 21 000 lbs	45 km per hour	


\* Based on flat terrain

\*\* Must be equipped with T3-ELARG (ELARG-10)

## TSR3450

### SELF-LOADING SQUARE BALE CARRIER

The TSR3450 is a self-loading bale carrier enabling you to pick up and carry square bales quickly and effectively. Completely remote controlled from the safety and comfort of cab of your tractor. The rugged frame and steel bed will support wet and dry bales. The adjustable bale clamp allows you to load different size bale sizes. The TSR3450 has no comparison.

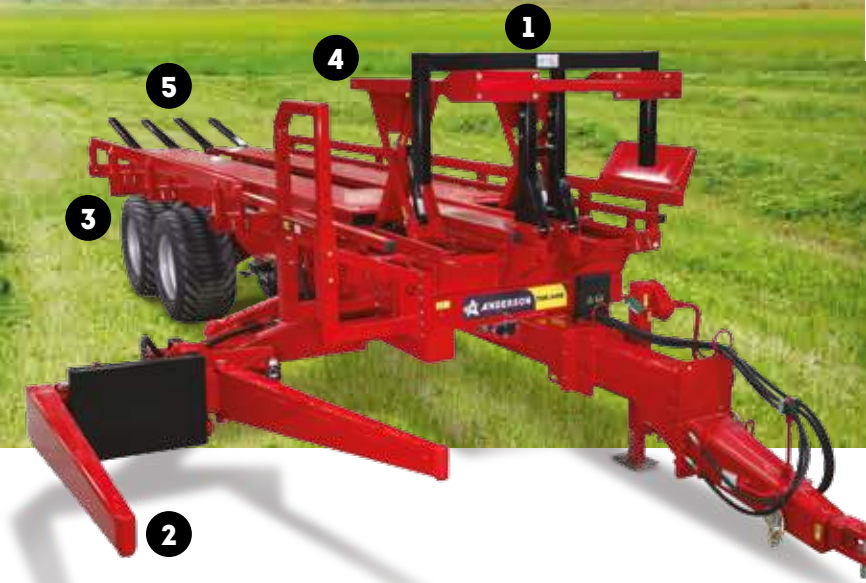

### FEATURES AND OPTIONS

1. High floatation tires.
2. Adjustable self-loading arm tubular round-shaped designed for bale net protection.
3. Hydraulic unloading system.
4. Hydraulic push off system.
5. Full charge indicator.
6. Tandem axle.
7. Rugged frame to support wet bales.



	SQUARE BALE CARRIER	TSR3450
<b>CAPACITY</b>	Tractor minimum HP requirements	130 HP*
	Square bale 3' x 3' x 8' long (90 cm x 90 cm x 2,4 m)	19
	Square bale 4' x 3' x 8' long (1,2 m x 90 cm x 2,4 m)	14
	Square bale 4' x 4' x 8' long (1,2 m x 1,2 m x 2,4 m)	7
<b>SPECIFICATIONS</b>	Bales transported per hour on a distance of 0,62 mile (1 km)	3' x 3' / 4' x 3' / 75 / 65
	Bales transported per hour on a distance of 1,24 mile (2 km)	3' x 3' / 4' x 3' / 55 / 45
	Bales transported per hour on a distance of 1,86 mile (3 km)	3' x 3' / 4' x 3' / 43 / 34
	Bales transported per hour on a distance of 2,48 miles (4 km)	3' x 3' / 4' x 3' / 36 / 27
	Bales transported per hour on a distance of 3,10 miles (5 km)	3' x 3' / 4' x 3' / 30 / 23
	Tires	550 / 45-22,5
	Maximum speed with a load of 25 000 lbs	30 km per hour
Maximum speed with a load of 21 000 lbs	45 km per hour	

\* Based on flat terrain



**HAUL MORE.  
WRAP MORE.**



**WRAPTOR™**

# WHAT SETS US APART THE WRAPTOR™



## ALL-IN-ONE

The WRAPTOR™ is the ultimate system for loading, transporting and wrapping. Designed to collect dry or wet hay and wrap without stopping or wasting time, it offers the fastest performance on the market. With the fastest bale wrapping system, transport 14 bales in less than 4 minutes with only one operator and a single tractor. The WRAPTOR™ is the combination of a self loading bale carrier and an in-line wrapper.

## BOTH SELF LOADING CARRIER... AND INLINE WRAPPER

The WRAPTOR™ includes two unique machines that are not designed to be sold separately. The self loading carrier collects and transports 14 bales (4 ft x 4 ft.) at a time. Its loading arm allows it to follow the baler and collect the bales directly in their position by gently rotating the bales before picking them up and loading them. No wasting time zigzagging in the field to collect the bales.

When the load is complete, the trailer is then attached to the wrapper without additional equipment and without having to leave the tractor seat. The pusher then allows the trailer to push the bales directly into the wrapper for a process without interruption. Also, the self-loading carrier attaching to the wrapper allows to transport it from one site to another. Only one tractor and one operator!

Like inline wrappers, the WRAPTOR™ has a simple and fully automatic wrapping system. It can wrap 14 bales in less than 4 minutes with only one operator and one tractor!

When labor is hard to find or you need to do things quickly, this all-in-one system offers you the perfect solution.

- 4 tensioners
- Adjustable bale guide rollers
- Adjustable hoop speed with flow control valve
- Hydraulic bale compaction system
- Honda 13 HP Engine
- Remote control of the wrapping process



## FASTER WITH LESS LABOR



POWERED by **HONDA**™

**WRAPTOR™**  
THE ALL-IN-ONE SYSTEM



**FEATURES AND OPTIONS**

1. Pick-up and transport faster with one operator.
2. Tilting tow bar for easy hook-up to the wrapper.
3. Bale pusher for quickly pushing and unloading bales.
4. 4 stretchers replace rolls less often, wrap faster.
5. Adjustable self-loading arm tubular round-shaped designed for bale net protection.
6. Bale guide rollers. Keep each bale centered on the roller bed when wrapping on a slope.
7. Hydraulic jack leveling system. Insures the 2 first bales stay together until lowered down to the ground.



**EFFICIENTLY TRANSPORT AND WRAP.**

The high-performance WRAPTOR™ is the combination of a self-loading trailer and an in-line wrapper. When labor is hard to find or you need to do things quickly, this all-in-one system allows you to do the transportation and wrapping with only one operator and one tractor.

The WRAPTOR™ is the ultimate system for loading, transporting and wrapping. Designed for collecting wet or dry hay, it offers the fastest performance on the market. The trailer collects and transports 14 bales (4 ft x 4 ft.) at a time and attaches to the wrapper without additional equipment. The remote control offers the possibility to do everything from the seat of the tractor.

	BALE CARRIER	WRAPTOR™
<b>CAPACITY</b>	Tractor minimum HP requirements	100 HP
	Round bale diameter	Up to 5' (1,5 m)
	Square bale	N/A
	Tires	500 / 45-22,5
	Maximum speed with a load of 25 000 lbs	30 km per hour
	Maximum speed with a load of 21 000 lbs	45 km per hour
	Camera	Standard

<b>SPECIFICATIONS</b>	Bales transported per hour on a distance of 0,62 mile (1 km)	59
	Bales transported per hour on a distance of 1,24 mile (2 km)	39
	Bales transported per hour on a distance of 1,86 mile (3 km)	29
	Bales transported per hour on a distance of 2,48 miles (4 km)	23
	Bales transported per hour on a distance of 3,10 miles (5 km)	19

**BALES TRANSPORTED AND WRAPPED WITH ONE TRACTOR AND ONE OPERATOR**

	WRAPPER	WRAPTOR™
<b>CAPACITY</b>	Round bale diameter	Up to 5' (1,5 m)
	Square bale	N/A
	Wrapping speed	Wrap 14 bales in less than 4 minutes*
	Final bale push off system	With the trailer pusher
	Aluminum stretcher	4 x 30" (750 mm)
	Leveling system	Hydraulic jack
<b>SPECIFICATIONS</b>	Traction tires	29 x 12,5-15
	Rear tires	11 L-15
	Bed shape	V shaped for round bales
	Bale guide rollers	Standard
	Mechanical and automatic wrapping system	Standard
	Adjustable hydraulic compaction system	Hydraulic

\* Speed based on wrapping 4' bales.



POWERED by  
**HONDA™**

**STILL THE BEST  
YOU CAN GET.**



**INLINE WRAPPER**

# WHAT SETS US APART INLINE WRAPPERS

## INLINE WRAPPER

### XTRACTOR™: UNIQUE TO ANDERSON

XTRACTOR™, a patented and exclusive Anderson system, allows a quick and easy extraction of the last bale in less than a minute. A simple lever allows you to do everything. Only one step is needed to push the last bale. Anderson is the only manufacturer to offer you a fully automatic, effortless last bale pushing system.



U.S. Patent No. 9,374,946

### MECHANICAL AND HYDRAULIC SYSTEM

The Anderson inline wrappers are reliable, easy to use and easy to adjust. They are also more reliable than systems that use electronics. Good weather or bad weather, they will never let you down. Highest reliability on the market.

### LEVELING SYSTEM

With a hydraulic jack and hydraulic lift axle, they provide greater stability on soft or sloping terrain. Lifting the machine to the desired height is effortless, while moving through the field or even when connecting to a truck.

### AUTOGUIDING

The autopilot is an optical sensor that allows the machine to automatically guide itself to the adjacent row, for optimization of the storage area. It gives you straight rows, with the same spacing between them.



### FUEL TANK

The large capacity gas tank (25L, 6.6 gal) ensures you greater autonomy and fewer stops to refuel when you work and minutes count.



### THE REMOTE

The remote control allows you to steer the wrapper and start or stop the engine at the push of a button without leaving the tractor seat. It also makes it possible to control the wrapping process. The Anderson Inline wrappers are all manufactured standard self-propelled. No additional steps are required. When it comes time to move the machine, takes a few seconds and you are gone! Very easy to tow.

### V-SHAPED OR FLAT DECK

Easily move from round to square bales by simply lifting a lever so that the V-shaped platform becomes flat. The quick-change system and the adjustable bale-guide rollers make it possible to go from round to square bales and even to wrapping double stacked bales in 2 minutes.



### DAY AND EVENING

Work lights also offer increased visibility when wrapping early in the morning or late at night.

### MORE COMPACT BALES

The hydraulically adjustable compacting system is the most important feature of an inline wrapper, enabling the operator to put the right amount of brake pressure on the machine in order to achieve perfect bale compaction in all terrain conditions. For the wrapping of 2 stacked bales, it is suggested to wrap dry hay instead of silage for a better conservation of the nutritional value.

### KEEP NUTRIENTS IN!

Aluminum stretchers provide compact and waterproof bales by eliminating oxygen and increasing the quality of feed for greater nutritional value. Enhanced wrapping speed is achieved with 4 aluminum stretchers, allowing you to replace your plastic rolls less often. Increase the amount of film applied to the bales for a better seal in less time. Anderson is the only manufacturer able to offer a system of 4 independent stretchers installed at the factory ensuring better seal and better overlap of plastic layers. This will also help prevent puncture when it comes time to protect the corners of square bales.



### PLASTIC FILM WATCH

The plastic detector automatically stops the wrapping when the plastic runs out or tears, preventing the cycle from continuing without plastic and damaging the already started tube.

### FLEX HOOP TECHNOLOGY

The HYBRID X XTRACTOR™ inline wrapper is designed with advanced Flex Hoop technology that allows you to wrap round or square bales with the same machine. The exclusive feature of the Flex Hoop technology ensures that the corners are wrapped precisely for square bales. All our models feature a larger hoop allowing you to wrap 6-foot bales. The bale pusher is faster than ever with its improved integrated cylinders.

COMBOS	NATURAL BORN LEADER COMBO	FARM KING COMBO	CUSTOM OPERATOR COMBO	CUSTOM OPERATOR PLUS + COMBO
Plastic film watch	•	•	•	•
Working light	•	•	•	•
Remote stop and start	•	•	•	•
Remote steering		•	•	•
Large fuel tank (25 L 6.6 Gal.)		•	•	•
Electronic bale counter			•	•
Automatic pilot			•	•
2 extra stretchers (available only for IFX660, standard on HYBRID X)				•
20 HP engine (only available on HYBRID X)				•

ADDITIONAL OPTIONS





## NWS660

INLINE WRAPPER FOR ROUND BALES

Whether you are looking to wrap 50 or 5000 bales, this model has the features to handle wrapping round bales up to 6' in diameter. No compromises have been made in manufacturing the NWS660 providing you the same quality wrapping speed and high-volume capacity of up to 180 bales per hour, as all other inline wrapper models at an economical price point.



Model shown: Farm King Combo

### FEATURES AND OPTIONS

1. Remote control for starting, and stopping the unit remotely without leaving the tractor.
2. Work lights.
3. Large fuel tank (25 L, 6.6 GAL.) Wrap 5 times more bales than with regular tank with less down time.
4. Film watch sensor automatically shuts down the wrapping cycle when the machine runs out of film or film breaks.
5. Bale guide rollers keep each bale centered on the roller bed when wrapping on a slope.
6. V-Shaped roller bed for round bales.
7. Hydraulic jack leveling system prevents the first bales from tumbling down and keeps them together for an easy row start.
8. New larger hoop to wrap 6' bales.
9. The Honda engine offers high power, exceptional adaptability, quiet operation and fuel efficiency.

POWERED by  
**HONDA**™

UP TO  
5' 6'



	INLINE WRAPPER	NWS660
CAPACITY	Round bale diameter	Up to 6' (1,8 m)**
	Round bale length	Up to 5' (1,5 m)
	Square bale	N/A
	Wrapping speed	Up to 180 bales/h*
	Final bale push off system	Manually
	Aluminum stretcher	2 x 30" (750 mm)
	Leveling system	Hydraulic jack
SPECIFICATIONS	Traction tires	29 x 12,5-15
	Rear tires	11 L-15
	Bed shape	V shaped for round bales
	Bale guide rollers	Standard
	Mechanical and automatic wrapping system	Standard
	Adjustable hydraulic compaction system	Hydraulic

\* Speed based on wrapping 4' bales.  
\*\* Based on perfectly shaped 6' bales.

## IFX660 XTRACTOR™

INLINE WRAPPER FOR ROUND BALES

The IFX660 XTRACTOR™ model offers the versatility and power which will help you reach another level of performance. This model stems from the tested and proven NWS660 using the same manufacturing quality and precision. The new features of the IFX660 include: larger hoop capabilities for wrapping 6' round bales, new faster than ever pusher allowing you to wrap more bales per minute. Increased speed and performance for high quality feed and to protect nutrient value of your silage bales.



Model shown: Farm King Combo

### FEATURES AND OPTIONS

1. XTRACTOR™ final bale push off system with a simple pull of a lever.
2. Hydraulic lifting axles allow to overcome obstacles when moving the machine.
3. Film watch sensor automatically shuts down the wrapping cycle when the machine runs out of film or film breaks.
4. 4 stretchers.
5. Autopilot the automatic pilot system allows the wrapper to precisely steer itself by following the adjacent bale row, maximizing the space needed to store your bales.
6. Remote control for starting, steering, and stopping the unit remotely without leaving the tractor.
7. Work lights.
8. Large fuel tank (25 L, 6.6 GAL.) wrap 5 times more bales than with regular tank with less down time.
9. Bale guide rollers keep each bale centered on the roller bed when wrapping on a slope.
10. V-Shaped roller bed for round bales.
11. The Honda engine offers high power, exceptional adaptability, quiet operation and fuel efficiency.

POWERED by  
**HONDA**™

UP TO  
5' 6'



	INLINE WRAPPER	IFX660
CAPACITY	Round bale diameter	Up to 6' (1,8 m)**
	Round bale length	Up to 5' (1,5 m)
	Square bale	N/A
	Wrapping speed	Up to 180 bales/h*
	Final bale push off system	XTRACTOR™ patented unique system
	Aluminum stretcher	2 x 30" (750 mm) or 4 x 30" (optional)
	Leveling system	Hydraulic lifting axle
SPECIFICATIONS	Traction tires	29 x 12,5-15
	Rear tires	11 L-15
	Bed shape	V shaped for round bales
	Bale guide rollers	Standard
	Mechanical and automatic wrapping system	Standard
	Adjustable hydraulic compaction system	Hydraulic

\* Speed based on wrapping 4' bales.  
\*\* Based on perfectly shaped 6' bales.

## HYBRID X XTRACTOR™

INLINE WRAPPER FOR ROUND AND SQUARE BALES

Make sure all your hard work does not go to waste, wrap silage bales with the HYBRID X XTRACTOR™ for round and square bales. Combining the features of both a round and square bale wrapper, this model delivers dramatically higher efficiency ensuring perfectly wrapped bales every time. Its versatility makes it ideal for custom operators.



Model shown: Custom Operator

### FEATURES AND OPTIONS

1. XTRACTOR™ final bale push off system with a simple pull of a lever
2. 4 stretchers.
3. Easily switch from round to square bales by simply lifting a lever to go from a v-strapped bed to a flat bed.
4. Autopilot the automatic pilot system allows the wrapper to precisely steer itself by following the adjacent bale row, maximizing the space needed to store your bales.
5. Remote control for starting, steering, and stopping the unit remotely without leaving the tractor.
6. Large fuel tank (25 L, 6.6 GAL.) wrap 5 times more bales than with regular tank with less down time.
7. Film watch sensor automatically shuts down the wrapping cycle when the machine runs out of film or film breaks.
8. Bale guide rollers keep each bale centered on the roller bed when wrapping on a slope.
9. Hydraulic lifting axles allow to overcome obstacles when moving the machine.
10. 20 HP engine.

POWERED by **HONDA™**



	INLINE WRAPPER	HYBRID X
CAPACITY	Round bale diameter	Up to 6' (1,8 m)**
	Round bale length	Up to 5' (1,5 m)
	Square bale	3' x 3' (80 x 90 cm) or 4' x 3' (90 x 120 cm) up to 6' (1,8 m)
	Wrapping speed	Up to 180 bales/h*
	Final bale push off system	XTRACTOR™ patented unique system
	Aluminum stretcher	4 x 30" (750 mm)
	Leveling system	Hydraulic lifting axle
SPECIFICATIONS	Traction tires	29 x 12,5-15
	Rear tires	11 L-15
	Bed shape	Ajustable V shaped for round bales or flat for square bales
	Bale guide rollers	Standard
	Mechanical and automatic wrapping system	Standard
	Adjustable hydraulic compaction system	Hydraulic

\* Speed based on wrapping 4' bales.  
\*\* Based on perfectly shaped 6' bales.

## EVOLUTION XTRACTOR™

INLINE WRAPPER FOR ROUND AND SQUARE BALES

The Evolution XTRACTOR™ has the capacity to meet the highest demand in wrapping. The maximized size of the rigid hoop and the enhanced flat shaped roller bed performs consistently with every type of bales. With the best manufacturing process, Anderson ensures the highest quality for long-lasting products.



Model shown: Evolution 1

### FEATURES AND OPTIONS


1. XTRACTOR™ final bale push off system with a simple pull of a lever
2. Film watch sensor automatically shuts down the wrapping cycle when the machine runs out of film or film breaks.
3. Remote control for starting, steering, and stopping the unit remotely without leaving the tractor.
4. 20 HP engine.
5. Autopilot the automatic pilot system allows the wrapper to precisely steer itself by following the adjacent bale row, maximizing the space needed to store your bales.
6. 4 stretchers.

POWERED by **HONDA™**



	INLINE WRAPPER	EVOLUTION
CAPACITY	Round bale diameter	Up to 6' (1,8 m)**
	Round bale length	Up to 5' (1,5 m)
	Square bale	3' x 3' (80 x 90 cm) or 4' x 3' (90 x 120 cm) up to 6' (1,8 m) (wrap double stacked or single bale)
	Wrapping speed	Up to 120 bales/h*
	Final bale push off system	XTRACTOR™ patented unique system
	Aluminum stretcher	4 x 30" (750 mm)
	Leveling system	Hydraulic jack
SPECIFICATIONS	Traction tires	31 x 15,5-15
	Rear tires	12,5 L-15
	Bed shape	Flat for square bales
	Bale guide rollers	Standard
	Mechanical and automatic wrapping system	Standard
	Adjustable hydraulic compaction system	Hydraulic

\* Speed based on wrapping 4' bales.  
\*\* Based on perfectly shaped 6' bales.

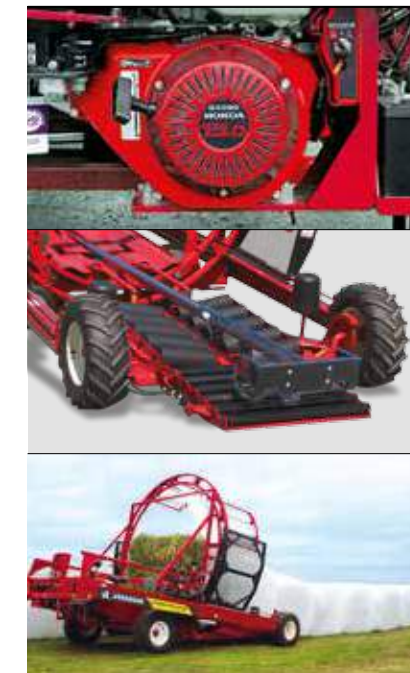

# A SIMPLE WAY TO GET PEACE OF MIND



**SINGLE BALE WRAPPERS**

# WHAT SETS US APART SINGLE BALE WRAPPERS

## SINGLE BALE WRAPPERS

### OPTIMIZED WRAPPING

#### WRAP EFFORTLESSLY

We offer models that are fully automated and remotely controlled. No need to come down from the tractor to select or change the configuration, changes can be made with the remote directly from the tractor cab. It is thus possible to start the wrapping cycle, to pause it and to reactivate it at any time. It is also possible to start or stop the engine remotely, to select the number of rotations, ie the number of layers of plastic, to choose the rotation speed of the table, the number of wrapped bales per day and the total number of bales.



#### MORE OPTIONS

Possibility of adding a 1 position or 3 positions bale dumper. When you are wrapping on an incline terrain, the 3-position bale receiver allows you to unload the bale to the right, left or back, and let it roll gently to the ground. Also available on some models, the front and rear stabilizers provide perfect stationary wrapping on any surface.

The RB200 unloading system (3-point hitching machine) differs from the competition in the stability of its table. While other products will tend to twist and turn when unloading, the Anderson RB200 keeps the table hydraulically in a stable position for the bale to be unloaded in a straight line.



50

### THE MOST EQUIPPED IN THE INDUSTRY

- Possibility to have a Honda 13 HP 18 amp engine offering greater freedom of operation.
- Bale guide rollers and seamless belts keep the bales centered on the machine, even when wrapping on slopes or rough terrain.
- Electronic bale counter allows you to select the number of turns and inform you when this number is reached. It also tracks the number of wrapped bales per day and per year.
- High-quality 30-inch aluminum stretchers increase the wrapping speed with the second stretcher by 40% (available on some models).
- We offer mechanical or hydraulic plastic cutting systems (depending on the model) that allows the operator to remain on the tractor to perform the maneuver.




POWERED by  
**HONDA**™



51



# WRAP SIMPLY AND EASILY

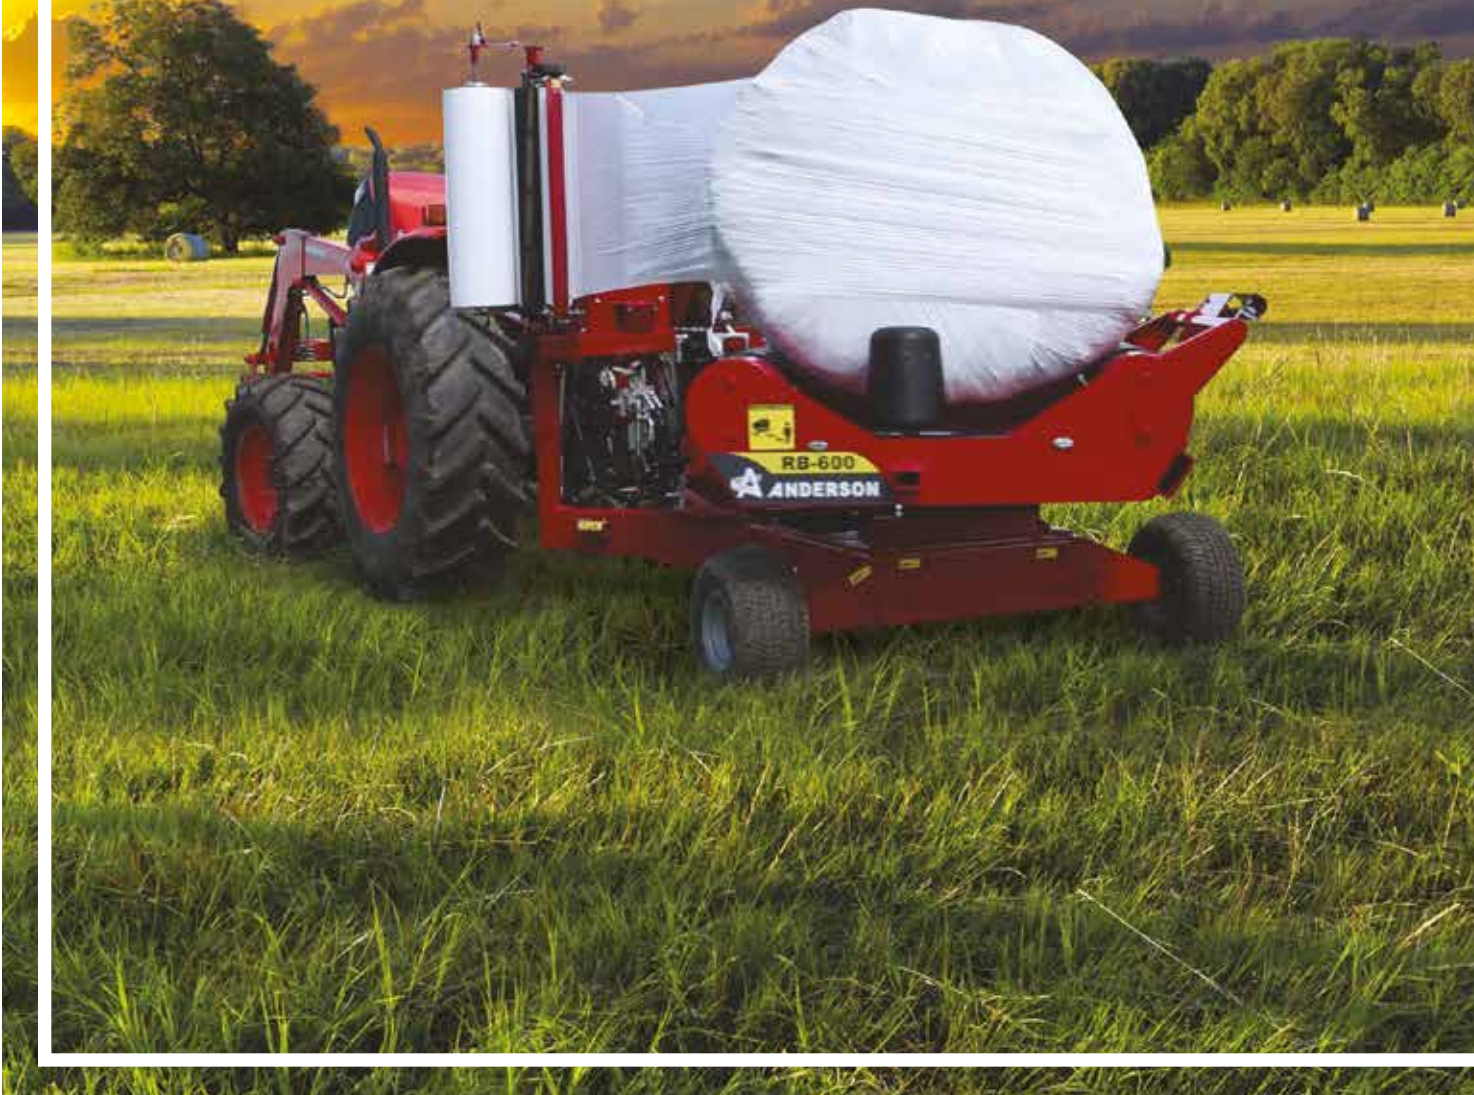

## RB200 SINGLE BALE WRAPPER FOR ROUND BALES

The RB200 3 point hitch single bale wrapper will be suited for small farm operations who want quality and dependability. Intended to be used as a stationary equipment and connected to a tractor using a 3 point mounting system. Unlike other products on the market, the RB200 will not limit you to wrapping a limited number of bales per year, the Anderson manufacturing quality gives you peace of mind and insures an long-lasting unlimited use of the wrapper.

### FEATURES AND OPTIONS

1. Knife cutting the plastic film after a new bale has been placed on the wrapper's table.
2. Table with seamless belts allowing each type of bales to rotate and be wrapped evenly. The unloading system RB200 differs from the competition in the stability of its table. While other products on the market will tend to twist and turn when they unload, the Anderson RB200 keeps the table hydraulically in a stable position for the bale to be unloaded in a straight line.
3. The RB200 is connected to the tractor by means of a 3-point hitch system, powered by the tractor's hydraulic pump motor.
4. World class aluminum stretcher.
5. Bale counter displaying the number of bale wrapped.
6. Bale guide rollers keep the bales centered on the wrapper even when on a slope.
7. Manual wrapping process via the hydraulic control levers of the tractor.

POWERED by  
**HONDA**™

UP TO  
**5' 6"**

	SINGLE BALE WRAPPER	RB200
<b>CAPACITY</b>	Diameter of the round bale	Up to 5' 6" (1,65 m)
	Length of the round bale	Up to 5' (1,5 m)
	Square bale	N/A
	Wrapping speed	Up to 30 bales/h*
	Wrapping process	Manual
	Honda engine	N/A
	Aluminum stretcher	1 x 30" (750 mm)
	Plastic cut and hold system	Plastic cut only
<b>SPECIFICATIONS</b>	Leveling system	N/A
	Bale guide rollers	Standard
	Bale counter	Standard



Details and technical specifications, see pages 50 et 51.  
\* Speed based on wrapping 4' bales.

## RB400

SINGLE BALE WRAPPER FOR ROUND BALES

These pull type individual wrapper models are compact and simple to operate. Outstanding stability and wrapping performance that can be operated manually or automatically. They will deliver perfectly air-tight wrapped baleage ensuring nutritional value of your bales.



### FEATURES AND OPTIONS

1. Proven high quality aluminum stretcher.
2. Bale guide rollers keep the bales centered on the wrapper even when on a slope.
3. Electronic bale counter.
4. Turntable's belts allow for any type of bales to rotate be wrapped evenly regardless of their shape or condition.
5. Manual wrapping process via the control levers directly on the machine..

POWERED by  
**HONDA**™

UP TO  
5' 5'6"



SINGLE BALE WRAPPER		RB400
CAPACITY	Diameter of the round bale	Up to 5' 6" (1,65 m)
	Length of the round bale	Up to 5' (1,5 m)
	Square bale	N/A
	Wrapping speed	Up to 40 bales/h*
	Wrapping process	Manual
	Honda engine	N/A
	Aluminum stretcher	1 x 30" (750 mm)
	Plastic cut and hold system	N/A
Leveling system	N/A	
SPECIFICATIONS	Bale guide rollers	Standard
	Bale counter	Standard

Details and technical specifications, see pages 50 et 51.  
\* Speed based on wrapping 4' bales.

## RB500

SINGLE BALE WRAPPER FOR ROUND BALES

These pull type individual wrapper models are compact and simple to operate. Outstanding stability and wrapping performance that can be operated manually or automatically. They will deliver perfectly air-tight wrapped baleage ensuring nutritional value of your bales.




### FEATURES AND OPTIONS

1. Mechanical cut and hold system holds the film in place and cuts it automatically at the end of the cycle.
2. Proven high quality aluminum stretcher.
3. Bale guide rollers keep the bales centered on the wrapper even when on a slope.
4. Hydraulic table dumper.
5. Electronic bale counter.
6. Turntable's belts allow for any type of bales to rotate be wrapped evenly regard-less of their shape or condition.
7. Manual wrapping process via the control levers directly on the machine.

POWERED by  
**HONDA**™

UP TO  
5' 5'6"

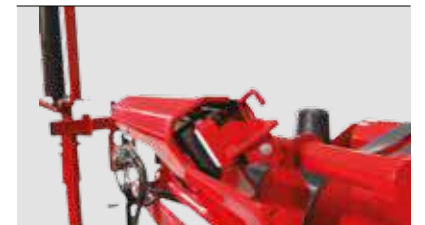

SINGLE BALE WRAPPER		RB500
CAPACITY	Diameter of the round bale	Up to 5' 6" (1,65 m)
	Length of the round bale	Up to 5' (1,5 m)
	Square bale	N/A
	Wrapping speed	Up to 40 bales/h*
	Wrapping process	Manual
	Honda engine	N/A
	Aluminum stretcher	1 x 30" (750 mm)
	Plastic cut and hold system	Mechanical
Leveling system	N/A	
SPECIFICATIONS	Bale guide rollers	Standard
	Bale counter	Standard

Details and technical specifications, see pages 50 et 51.  
\* Speed based on wrapping 4' bales.

## RB580

SINGLE BALE WRAPPER FOR ROUND BALES

Make sure all your hard work does not go to waste, wrap individual silage bales with the RB580. The aluminium stretcher maintains a consistent stretch, which maximises film usage. This model provides the most consistent wrapping system and smoothest lowering of the bale to the ground at the same time eliminating stress on the machine.



### FEATURES AND OPTIONS

1. Loading arm that rotates the bale and loads it onto the wrapper. It allows the operator to load the bale and wrap it while moving to the next.
2. Bale receiver 3 positions, deposits the bale on the ground, on one of the two sides or standing. It unloads the bale to the right, to the left or to the rear when you wrap on a slope, will let it roll gently directly to the ground.
3. Electronic bale counter.
4. Designed for field wrapping, it can follow the baler with its loading arm.
5. Manual wrapping process via the hydraulic controls of the tractor
6. Mechanical plastic cutting system that holds the plastic in place and automatically cuts it at the end of the cycle.

POWERED by  
**HONDA**™

UP TO  
5' 6"




Details and technical specifications, see pages 50 et 51.  
\* Speed based on wrapping 4' bales.

## RB600

SINGLE BALE WRAPPER FOR ROUND BALES

These pull type individual wrapper models are compact and simple to operate. Outstanding stability and wrapping performance that can be operated automatically. They will deliver perfectly air-tight wrapped baleage ensuring nutritional value of your bales.

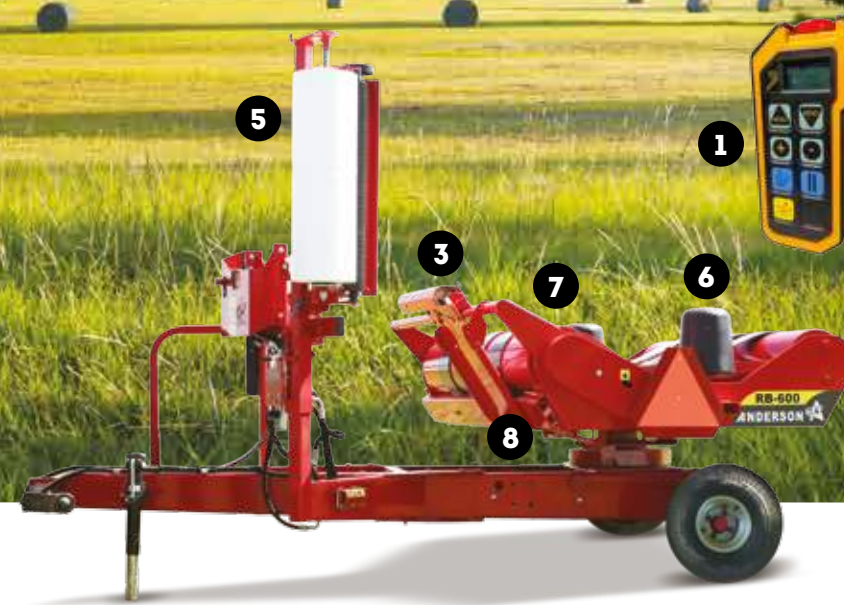

### FEATURES AND OPTIONS

1. Remote control to control wrapping.
2. Designed to wrap stationary and automatically with a single operator.
3. Mechanical cut and hold system holds the film in place and cuts it automatically at the end of the cycle.
4. Honda engine offers high horsepower, exceptional adaptability, quiet operation, great fuel efficiency.
5. Proven high quality aluminum stretcher.
6. Bale guide rollers keep the bales centered on the wrapper even when on a slope.
7. Hydraulic table dumper.
8. Turntable's belts allow for any type of bales to rotate be wrapped evenly regard-less of their shape or condition.
9. Automatic wrapping process.

POWERED by  
**HONDA**™

UP TO  
5' 6"



SINGLE BALE WRAPPER		RB600
CAPACITY	Diameter of the round bale	Up to 5' 6" (1,65 m)
	Length of the round bale	Up to 5' (1,5 m)
	Square bale	N/A
	Wrapping speed	Up to 40 bales/h*
	Wrapping process	Automatic
	Honda engine	13 HP (18 A) (included with model RB600E)
	Aluminum stretcher	1 x 30" (750 mm)
	Plastic cut and hold system	Mechanical
	Leveling system	N/A
SPECIFICATIONS	Bale guide rollers	Standard
	Bale counter	Standard

Details and technical specifications, see pages 50 et 51.  
\* Speed based on wrapping 4' bales.

## RB680

SINGLE BALE WRAPPER FOR ROUND BALES

Make sure that all your efforts are not wasted with the individual RB680 wrapper. The aluminum tensioner maintains constant tension on the bale, maximizing the use of plastic. This model provides a uniform wrapping system and unloads the bale on the ground in a gentle way to eliminate stress on the machine.



Model shown: Farm King Combo

### FEATURES AND OPTIONS

1. Front and rear stabilizer keep the wrapper level and stable
2. 3 position bale dumper deposits bales onto the ground in 3 different positions including on either end.
3. Since the machine is fully automated and remotely controlled, no need to go down from the tractor to select or change the configuration; Changes can be made with the remote from the tractor cab.
4. Electronic bale counter.
5. Designed to wrap stationary with a single operator.
6. Increase wrapping speed by 40% with the optional second stretcher.
7. Hydraulic plastic cut and hold system.

POWERED by  
**HONDA**™

UP TO  
5' 6'



SINGLE BALE WRAPPER		RB680
CAPACITY	Diameter of the round bale	Up to 6' (1,8 m)
	Length of the round bale	Up to 5' (1,5 m)
	Square bale	N/A
	Wrapping speed	Up to 65 bales/h*
	Wrapping process	Automatic
	Honda engine	13 HP (18 A)
	Aluminum stretcher	1 x 30" (750 mm) or 2 x 30" (optional)
	Plastic cut and hold system	Hydraulic
SPECIFICATIONS	Leveling system	Front and rear stabilizers
	Bale guide rollers	Standard
	Bale counter	Standard

Details and technical specifications, see pages 50 et 51.  
\* Speed based on wrapping 4' bales.

## 780SB

SINGLE BALE WRAPPER FOR ROUND & SQUARE BALES

The 780SB fully automated wrapper for square and round bales. The rotating rollers ensure an even rotation of the bale and the efficient application of the film. Versatile too, with a simple adjustment the square bale wrapper will equally and efficiently wrap large round bales.



Model shown: Custom Operator

### FEATURES AND OPTIONS

1. Bale receiver.
2. Front and rear stabilizer keep the wrapper level and stable.
3. 40% faster with 2 stretchers.
4. Hydraulic cut and hold system.
5. Remote control controls the complete wrapping process from your tractor seat.
6. Hybrid wrapper for both square and round bales.
7. Automatic wrapping process.

POWERED by  
**HONDA**™

UP TO  
5' 6' 3' 3'


ROUND AND SQUARE SINGLE BALE WRAPPER		780SB
CAPACITY	Diameter of the round bale	Up to 6' (1,8 m)
	Length of the round bale	Up to 5' (1,5 m)
	Square bale	3' x 3' up to 6'
	Wrapping speed	Up to 65 bales/h*
	Wrapping process	Automatic
	Honda engine	13 HP (18 A)
	Aluminum stretcher	1 x 30" (750 mm) or 2 x 30" (optional)
	Plastic cut and hold system	Hydraulic
SPECIFICATIONS	Leveling system	Front and rear stabilizers
	Bale guide rollers	Standard
	Bale counter	Standard

Details and technical specifications, see pages 50 et 51.  
\* Speed based on wrapping 4' bales.





# ACCESSORIES

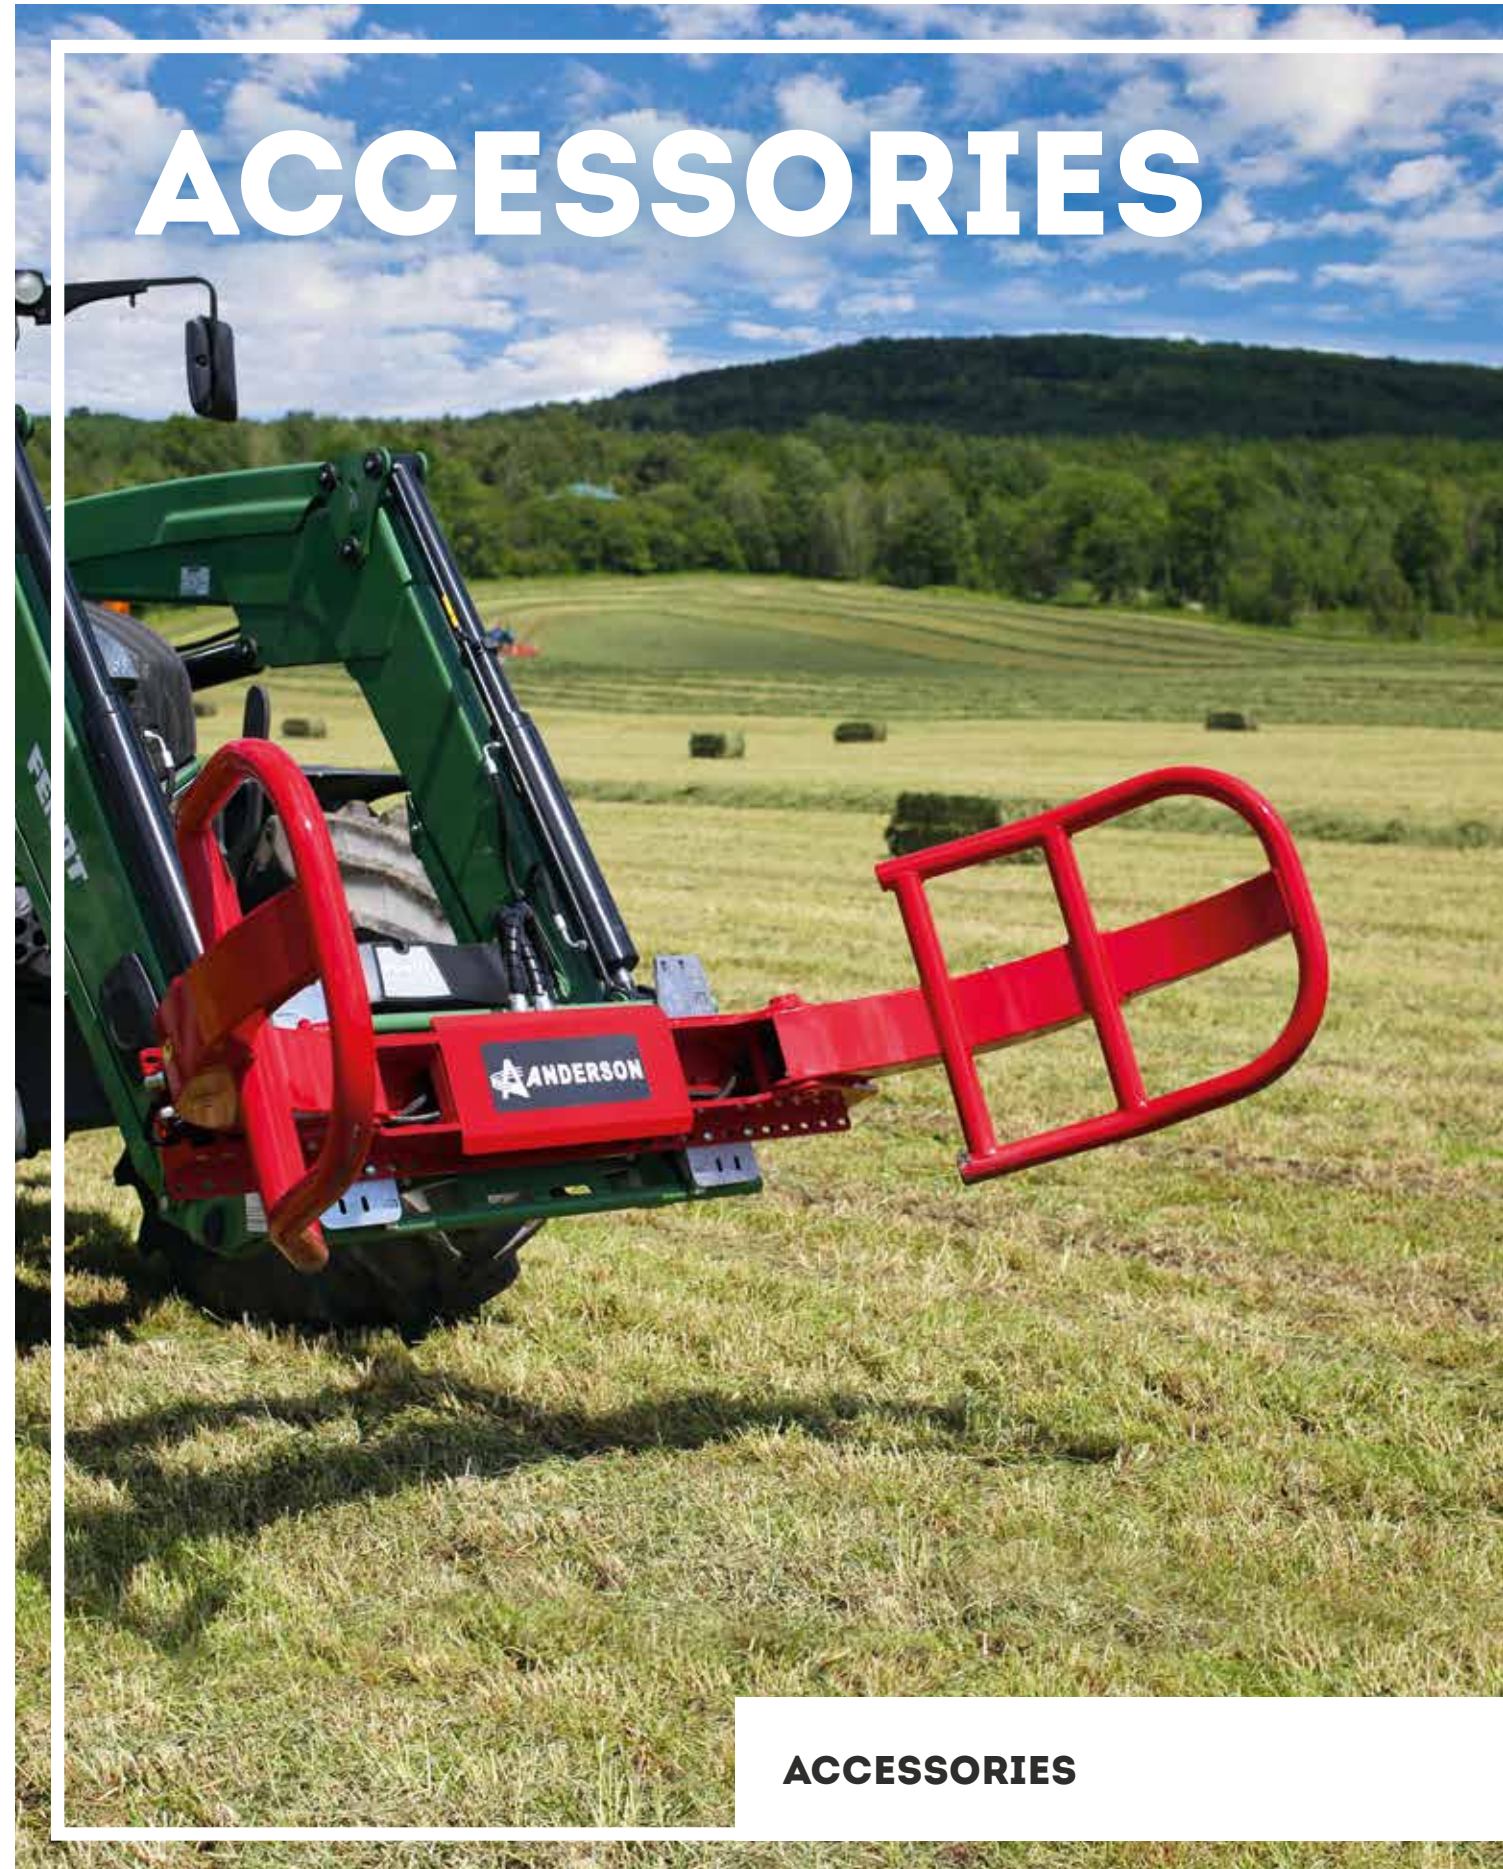


**ACCESSORIES**

## BALE GRABBERS



**MODEL 4000**

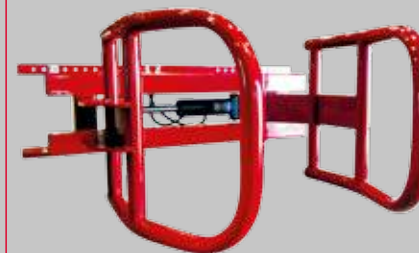

**MODEL 5000**



**MODEL 6000**

## FEATURES AND OPTIONS

Anderson bale grabbers are available in several models to meet the needs of your farm. They are operated gently for wrapped bales or with a net.

### BALE GRABBERS - MODEL 4000

For round bales up to 60" (1.5 m) diameter.

Include the following features:

- Minimum opening: 33.5" (86 cm)
- Maximum opening: 68" (173 cm)
- 2 cylinder
- Frame dimension: 66.75" (167 cm)

### BALE GRABBERS - MODEL 5000

For round bales up to 63" (1.57 m) diameter.

Include the following features:

- Minimum opening: 33.5" (86 cm)
- Maximum opening: 84" (213 cm)
- 1 cylinder
- Frame dimension: 65" (165 cm)

### BALE GRABBERS - MODEL 6000

For round and square bales up to 84" (2.1 m) diameter.

Include the following features:

- Minimum opening: 19" (48 cm)
- Maximum opening: 90" (229 cm)
- 2 cylinder
- Frame dimension: 66.75" (167 cm)

Anderson bale spears are a simple and sturdy tool for handling square or round bales.

Bale spear = 1 spear (round bale)

Bale spear = 2 spears (round and square bale)

Protector shield for spears.

Quick attach available.




# NATURALLY INNOVATIVE



**TECHNICAL SPECIFICATIONS**

# TECHNICAL SPECIFICATIONS


## SMARTMIX™

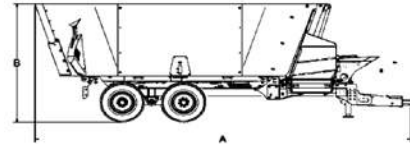

SMARTMIX™	A280 PULLED TYPE	A380 PULLED TYPE	A520 PULLED TYPE
<b>DIMENSIONS</b>			
Overall length (m) - A	4,44 m (14' 7")	<b>A380ST</b> - 4,80 m (15' 9") <b>A380FD</b> - 5,61 m (18' 5")	<b>A520ST</b> - 6,15 m (20' 2") <b>A520FD</b> - 7,01 m (23')
Overall width (m) - B	2,47 m (8' 1")	2,54 m (8' 4")	2,59 m (8' 6")
Overall height (m) - C	2,29 m (7' 6")	<b>A380ST</b> - 2,67 m (8' 9") <b>A380FD</b> - 2,46 m (8' 1")	<b>A520ST</b> - 2,59 m (8' 6") <b>A520FD</b> - 2,57 m (8' 5")
Distance between wheels and discharge point (D)	Incline conveyor 3': 0,77 m (2' 6") Incline conveyor 4': 0,97 m (3' 2") Incline conveyor 5': 1,26 m (4' 2")	Incline conveyor 3': <b>A380ST</b> - 0,84 m (2' 9") <b>A380FD</b> - 0,97 m (3' 2") Incline conveyor 4': <b>A380ST</b> - 1,02 m (3' 4") <b>A380FD</b> - 1,16 m (3' 9") Incline conveyor 5': <b>A380ST</b> - 1,33 m (4' 4") <b>A380FD</b> - 1,48 m (4' 10")	Incline conveyor 3': <b>A520ST</b> - 0,7 m (2' 4") <b>A520FD</b> - 0,76 m (2' 6") Incline conveyor 4': <b>A520ST</b> - 0,89 m (2' 11") <b>A520FD</b> - 0,95 m (3' 1") Incline conveyor 5': <b>A520ST</b> - 1,2 m (3' 11") <b>A520FD</b> - 1,27 m (4' 2")
Discharge height (E)	Incline conveyor 3': 1,05 m (3' 5") Incline conveyor 4': 1,22 m (4' 0") Incline conveyor 5': 1,48 m (4' 10")	Incline conveyor 3': <b>A380ST</b> - 1,04 m (3' 5") <b>A380FD</b> - 0,9 m (2' 11") Incline conveyor 4': <b>A380ST</b> - 1,21 m (4') <b>A380FD</b> - 1,05 m (3' 5") Incline conveyor 5': <b>A380ST</b> - 1,48 m (4' 10") <b>A380FD</b> - 1,3 m (4' 3")	Incline conveyor 3': <b>A520ST</b> - 1,13 m (3' 9") <b>A520FD</b> - 1,01 m (3' 4") Incline conveyor 4': <b>A520ST</b> - 1,29 m (4' 3") <b>A520FD</b> - 1,17 m (3' 10") Incline conveyor 5': <b>A520ST</b> - 1,56 m (5' 1") <b>A520FD</b> - 1,43 m (4' 8")
<b>CAPACITY</b>			
Volume capacity (no extension)	8 m³ (282 pi³)	10,8 m³ (380 pi³)	14,7 m³ (520 pi³)
Capacity 6" extension	8,8 m³ (310 pi³)	11,8 m³ (416 pi³)	16 m³ (568 pi³)
Capacity 12" extension	9,5 m³ (338 pi³)	12,8 m³ (453 pi³)	17,5 m³ (617 pi³)
Capacity 18" extension	10,4 m³ (367 pi³)	13,8 m³ (490 pi³)	18,8 m³ (666 pi³)
Auger	1	1	2
<b>SPECIFICATIONS</b>			
PTO	540 RPM - 1" 3/8 Z6	540 RPM - 1" 3/8 Z6	540 RPM - 1" 3/8 Z6
2 speed Gear Box	N/A	Optional	Optional
2 Speed Gear Box and ratio	N/A	D732, 1;1,5	C3A-R, 1;1,5
PTO HP Requirement (High Speed)	70/75/80/85	85/90/95/100	100/110/120/130
PTO HP Requirement (Low Speed)	N/A	60/65/70/75	65/75/85/95
Auger RPM – Standard High speed	41 RPM	41 RPM	41 RPM
Auger RPM – Low Speed	N/A	27 RPM	27 RPM
Planetary model and ratio	2002 @ 13,4	2002 @ 13,4	2002 @ 13,4
Floor Thickness (AR400 grade)	5/8"	5/8"	5/8"
Sidewall Thickness (AR235 grade)	1/4"	1/4"	1/4"
Flighting Thickness (AR400 grade)	5/8"	5/8"	5/8"
Standard knives per auger	10	10	10
Drive line	In-line	In-line	In-line
Drive line security	Shear bolt	Shear bolt	Shear bolt
Hydraulic flow requirement	10 US gal/min - 15 US gal/min	10 US gal/min - 15 US gal/min	10 US gal/min - 15 US gal/min
Hydraulic pressure	160-200 bars (2300-2900 psi)	160-200 bars (2300-2900 psi)	160-200 bars (2300-2900 psi)
Load cell	3	3	3
Scale system	DG500/SMART CONTROL optional	DG500/SMART CONTROL optional	DG500/SMART CONTROL optional
Axle	Single	Single	Single
Machine Weight	2950 kg (6490 lb)	<b>A380ST</b> - 3700 kg (8140 lb) <b>A380FD</b> - 4000 kg (8800 lb)	<b>A520ST</b> - 5700 kg (12 540 lb) <b>A520FD</b> - 6000 kg (13 200 lb)
Utility load capacity	3820 kg (8405 lb)	<b>A380ST</b> - 5310 kg (11682 lb) <b>A380FD</b> - 5010 kg (11020 lb)	<b>A520ST</b> - 7120 kg (15 665 lb) <b>A520FD</b> - 6820 kg (15 000 lb)
Maximum speed	40 km/h (25 mph)	40 km/h (25 mph)	40 km/h (25 mph)
Tire specifications	15,0/55-17	28/12,5-15	315/80R22,5 L
Tire pressure specifications	9,5 bar (94 psi)	10 bar (145 psi)	8,5 bar (123 psi)

\*No capacity extension - \*\*No option

## SMARTMIX™

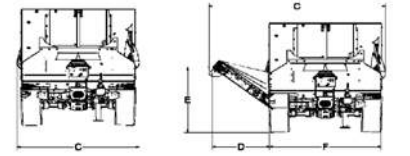


SMARTMIX™	A700 PULLED TYPE	A950 PULLED TYPE	A1230 PULLED TYPE
<b>DIMENSIONS</b>			
Overall length (m) - A	<b>A700ST</b> - 7,32 m (24') <b>A700FD</b> - 7,98 m (26' 2")	9,55 m (31' 8")	10,64 m (34' 11")
Overall width (m) - B	2,80 m (9' 2")	3 m (9' 9")	3 m (9' 9")
Overall height (m) - C	<b>A700ST</b> - 2,68 m (8' 9") <b>A700FD</b> - 2,67 m (8' 1")	2,58 m (8' 6")	2,85 m (9' 4")
Distance between wheels and discharge point (D)	Incline conveyor 3': <b>A700ST</b> - 0,64 m (2' 1") <b>A700FD</b> - 0,77 m (2' 6") Incline conveyor 4': <b>A700ST</b> - 0,83 m (2' 8") <b>A700FD</b> - 0,96 m (3' 2") Incline conveyor 5': <b>A700ST</b> - 1,13 m (3' 9") <b>A700FD</b> - 1,28 m (4' 2")	Incline conveyor 3': <b>A950FD</b> - 0,65 m (2' 2") Incline conveyor 4': <b>A950FD</b> - 0,82 m (2' 8") Incline conveyor 5': <b>A950FD</b> - 1,1 m (3' 7")	Incline conveyor 3': <b>A1230FD</b> - 0,66 m (2' 2") Incline conveyor 4': <b>A1230FD</b> - 0,83 m (2' 9") Incline conveyor 5': <b>A1230FD</b> - 1,11 m (3' 8")
Discharge height (E)	Incline conveyor 3': <b>A700ST</b> - 1,4 m (4' 7") <b>A700FD</b> - 1,26 m (4' 2") Incline conveyor 4': <b>A700ST</b> - 1,57 m (5' 2") <b>A700FD</b> - 1,41 m (4' 8") Incline conveyor 5': <b>A700ST</b> - 1,84 m (6') <b>A700FD</b> - 1,67 m (5' 6")	Incline conveyor 3': <b>A950FD</b> - 1,4 m (4' 7") Incline conveyor 4': <b>A950FD</b> - 1,59 m (5' 2") Incline conveyor 5': <b>A950FD</b> - 1,89 m (6' 2")	Incline conveyor 3': <b>A1230FD</b> - 1,39 m (4' 7") Incline conveyor 4': <b>A1230FD</b> - 1,57 m (5' 2") Incline conveyor 5': <b>A1230FD</b> - 1,87 m (6' 2")
<b>CAPACITY</b>			
Volume capacity (no extension)	19,7 m³ (695 pi³)	27,0 m³ (953 pi³)	35,0 m³ (1236 pi³)
Capacity 6" extension	21,6 m³ (762 pi³)	29,4 m³ (1038 pi³)	38,2 m³ (1348 pi³)
Capacity 12" extension	23,5 m³ (829 pi³)	31,9 m³ (1125 pi³)	41,4 m³ (1461 pi³)
Capacity 18" extension	25,4 m³ (897 pi³)	34,3 m³ (1212 pi³)	44,6 m³ (1575 pi³)
Auger	2	3	3
<b>SPECIFICATIONS</b>			
PTO	540 RPM / 1000 RPM	1000 RPM - 1" 3/4 Z20	1000 RPM - 1" 3/4 Z20
2 speed Gear Box	Optional	Standard	Standard
2 Speed Gear Box and ratio	C3A-R, 1;1,5 540 RPM C3A-R, 1,8;2,7 1000 RPM	A613, 1,8;2,7	A613, 1,8;2,7
PTO HP Requirement (High Speed)	120/130/140/150	145/160/175/190	180/200/220/240
PTO HP Requirement (Low Speed)	85/95/105/115	95/105/115/125	125/140/155/170
Auger RPM – Standard High speed	41 RPM	41 RPM	41 RPM
Auger RPM – Low Speed	27 RPM	27 RPM	27 RPM
Planetary model and ratio	2002 @ 13,4 / 2102 @ 13,6 (option)	2102 @ 13,6	2102 @ 13,6
Floor Thickness (AR400 grade)	3/4"	3/4"	3/4"
Sidewall Thickness (AR235 grade)	1/4"	1/4"	1/4"
Flighting Thickness (AR400 grade)	5/8"	5/8"	5/8"
Standard knives per auger	10	10	10
Drive line	In-line	In-line	In-line
Drive line security	Shear bolt	Shear bolt	Shear bolt
Hydraulic flow requirement	10 US gal/min - 15 US gal/min	10 US gal/min - 15 US gal/min	10 US gal/min - 15 US gal/min
Hydraulic pressure	160-200 bars (2300-2900 psi)	160-200 bars (2300-2900 psi)	160-200 bars (2300-2900 psi)
Load cell	4	6	6
Scale system	DG500/SMART CONTROL optional	DG500/SMART CONTROL optional	DG500/SMART CONTROL optional
Axle	Tandem	Tridem/self steering axle	Tridem/self steering axle
Machine Weight	<b>A700ST</b> - 7230 kg (15 910 lb) <b>A700FD</b> - 8090 kg (17 800 lb)	11 500 kg (25 300 lb)	13 000 kg (28 600 lb)
Utility load capacity	<b>A700ST</b> - 10 410 kg (22 900 lb) <b>A700FD</b> - 9550 kg (21 010 lb)	16 500 kg (36 300 lb)	16 500 kg (36 300 lb)
Maximum speed	40 km/h (25 mph)	40 km/h (25 mph)	40 km/h (25 mph)
Tire specifications	445/45R19,5	445/45R19,5	445/45R19,5
Tire pressure specifications	9 bar (130 psi)	9 bar (130 psi)	9 bar (130 psi)

\*No capacity extension - \*\*No option

# TECHNICAL SPECIFICATIONS

## SMARTMIX™

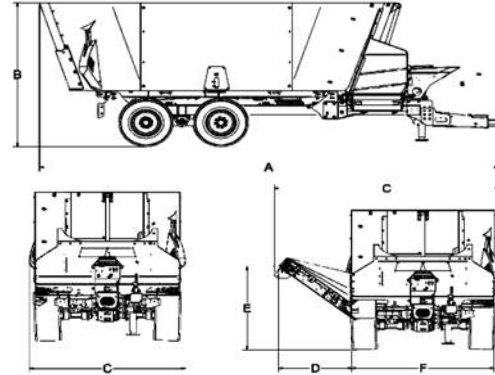

SMARTMIX		M600 SELF-PROPELLED	M800 SELF-PROPELLED
DIMENSIONS	Overall length (m) - A	34' 5" (10,3 m)	37' 4" (11,2 m)
	Overall width (m) - B	8' 1" (2,4 m)	8' 1" (2,4 m)
	Overall height (m) - C	10' 5" (3 m)	9' 7" (2,7 m)
	Overall weight (kg)	14 000 kg (30 864 lb)	14 500 kg (31 967 lb)
CAPACITY	Capacity 12" extension	600 cu <sup>3</sup> (16,9 m <sup>3</sup> )	822 cu <sup>3</sup> (23,2 m <sup>3</sup> )
	Auger	2	2
SPECIFICATIONS	HD planetary gear box	2	2
	Hydrostatic drive	Standard	Standard
	TRUE-CUT™ restrictor blades	Standard	Standard
	Cutting knife (10/Auger)	Standard	Standard
	Light kit	Standard (6)	Standard (6)
	(4) Tires 495/45R22.5 Goodyear (4 wheel drive - 4 direction wheels)	Standard	Standard
	Ladder	Standard	Standard
	Touch screen in-cab controls	Standard	Standard
	Engine	Deutz 217 HP 6 Cyl	Deutz 245 HP 6 Cyl


\*Sans rehausse - \*\*Sans option

## BALE BLOWER

BALE BLOWER/FEEDER		PRO-CHOP 150
DIMENSIONS	Overall width (m)	7' 11" (2.41 m)
	Overall height (m)	8' 10" (2.69 m)
	Overall length (m)	14' 8" (4.52 m)
	Overall weight (kg)	2550 kg (5621 lb)
	Bale chamber (W × H × L)	5' 4" × 3' 9" × 6' 5" (1.65 x 1.20 x 2 m)
	Bale chamber capacity	152 cu ft (4 m <sup>3</sup> )
BALE	Type of bales	Straw-hay-baleage
	Round Bale Capacity	1 bale up to 6' × 5' long (1.9 m × 1.5 m) or 2 bales 5' × 5' long (1.5 m × 1.5 m)
	Square Bale Capacity	4' × 4' × 9' (1.2 m × 1.3 m × 2.8 m)
	Maximum bale(s) weight	1250 kg (2755 lb)
SPECIFICATIONS	Maximum discharge distance	Up to 60' (18 m) on the right side and up to 40' (12 m) on the left side
	Controls	Electrical with conveyor speed adjustment
	Chute rotation	270°
	Tires	315 × 80 R 22.5 L
	Tractor mounting	Double plate hitch
	Number of blower paddles	8
	Number of knives	264
	Number of discs on rotor	22
	Tractor Minimum Hydraulic Flow	9 Gal/min (35 litres/min)
Tractor Minimum Hydraulic Pressure	2300-2900 psi	
Tractor Minimum HP requirements	70 HP	
Tractor hydraulic requirements	1	
PTO requirement	540 RPM	

# TECHNICAL SPECIFICATIONS

## SELF-LOADING TRAILERS

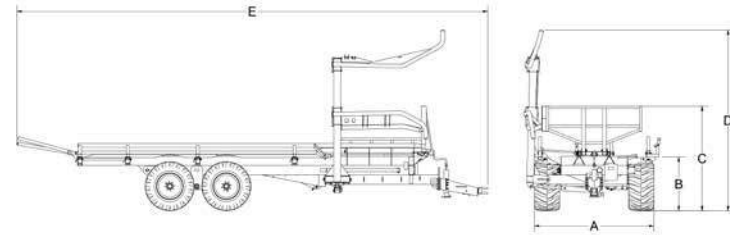

		TRB1000	TRB1400	TRB2000	TSR3450	STACKPRO 7200
<b>DIMENSIONS</b>	Width – A	8' 5" (2,6 m)	8' 5" (2,6 m)	8' 5" (2,6 m)	8' 5" (2,6 m)	8' 3" (243 cm)
	Overall width (including loading arm)	9' 1" (2,8 m)	9' 5" (2,9 m)	9' 5" (2,9 m)	9' 8" (3 m)	8' 3" (243 cm)
	Height – C	7' 5" (2,3 m)	7' 7" (2,4 m)	11' 1" (3,4 m)	7' 9" (2,4 m)	12' 8" (365 cm)*
	Overall height (including loading arm)	12' 6" (3,8 m)	12' 1" (3,6 m)	12' 1" (3,6 m)	9' 8" (3 m)	12' 8" (365 cm)
	Bed height	3' 9" (1,2 m)	3' 9" (1,2 m)	3' 9" (1,2 m)	4' 4" (1,4 m)	5' 3" (1,62 m)
	Overall length – E	24' 9" (7,6 m)	33' 5" (10,2 m)	33' 5" (10,2 m)	37' 6" (11,5 m)	39' (11,96 cm)
	Overall weight	3010 kg (6636 lb)	4620 kg (10 185 lb)	4940 kg (10 890 lb)	6890 kg (15 189 lb)	11 350 kg (25 022 lb)
	Weight on tow bar	680 kg (1499 lb)	1185 kg (2608 lb)	1363 kg (3000 lb)	1290 kg (2844 lb)	1261 kg (2782 lb)
<b>BALE CAPACITY</b>	Round bale diameter	Up to 5' (1,5 m)	Up to 5' (1,5 m)	Up to 5' (1,5 m)	N/A	N/A
	Round bale diameter (with side extension option)	Up to 5' 6" (1,65 m)	Up to 5' 6" (1,65 m)	Up to 5' 6" (1,65 m)	N/A	N/A
	Square bale	N/A	N/A	N/A	Up to 4' x 4' (120 cm x 120 cm)	Up to 4' x 4' (120 cm x 120 cm)
	Bale type	Baleage & dry hay	Baleage & dry hay	Baleage & dry hay	Baleage & dry hay	Baleage & dry hay
<b>SPECIFICATIONS</b>	Loading capacity on axle (including bale carrier weight)	12 247 kg (27 000 lb)	18 144 kg (40 000 lb)	18 144 kg (40 000 lb)	18 144 kg (40 000 lb)	21 772 kg (47 998 lb)
	Hydraulic unloading	Standard	Standard	Standard	Standard	Standard
	Unloading angle	40°	35°	35°	35°	90°
	Pusher travel stroke	6' 5" (1,98 m)	6' 5" (1,98 m)	6' 5" (1,98 m)	6' 5" (1,98 m)	Automatic
	Hydraulic push ramp system	Standard	Standard	Standard	Standard	Automatic
	Full charge indicator	Standard	Standard	Standard	Standard	Standard
	Double plate hitch	Standard	Standard	Standard	Standard	Standard
	Road lights	Standard	Standard	Standard	Standard	Standard
	Tandem axle	Standard	Standard	Standard	Standard	Standard
	Safety chain	Standard	Standard	Standard	Standard	Standard
	Self-loading arm design	Tubular round	Tubular round	Tubular round	Hydraulic clamp arm	Hydraulic clamp arm
	Able to load a second row of bales	N/A	N/A	Telescopic arm	Scissor platform	Platform
	Pole extension	N/A	N/A	N/A	Standard	N/A
	Tires	400/60-22,5	550/45-22,5	550/45-22,5	550/45-22,5	550/45-22,5
	Tractor Minimum Hydraulic Flow	10 gal/min (37 litres/min)	10 gal/min (37 litres/min)	10 gal/min (37 litres/min)	10 gal/min (37 litres/min)	10 gal/min (37 litres/min)
	Tractor Minimum Hydraulic Pressure	2200 psi	2200 psi	2500 psi	2500 psi	2500 psi
	Tractor Minimum HP requirements	100 HP	100 HP	130 HP	130 HP	175 HP
	Tractor Remote outlets required	3	3	2	2	2
	PTO Speed / PTO shaft	N/A	N/A	N/A	N/A	1000 RPM/1 3/4-Z21

\* This model requires a total unloading height of 334" (8,52 m).

## BALE LOADING CAPACITY AND SPEED


	TRB1000	TRB1400	TRB2000	TSR3450	STACKPRO 7200		
<b>CAPACITY</b>							
Round bale 4' x 4' diameter (1.2 m x 1.2 m)	10	14	20	N/A	N/A		
Round bale 4' x 5' diameter (1.2 m x 1.5 m)	10	14	20	N/A	N/A		
Round bale 4' x 5' 6" diameter (1.2 m x 1.6 m)	10 **	14 **	14	N/A	N/A		
Round bale 5' x 5" diameter (1.5 m x 1.5 m)	8	12 *	17	N/A	N/A		
Round bale 5' x 5' 6" diameter (1.5 m x 1.6 m)	8 **	12 */**	12 **	N/A	N/A		
Square bale 3' x 3' x 8' long (90 cm x 90 cm x 2.4 m)	N/A	N/A	N/A	19	27		
Square bale 4' x 3' x 8' long (1.2 m x 90 cm x 2.4 m)	N/A	N/A	N/A	14	16		
Square bale 4' x 4' x 8' long (1.2 m x 1.2 m x 2.4 m)	N/A	N/A	N/A	7	12		
Maximum loading capacity (lb)	20 000 lb	30 000 lb	29 000 lb	26 350 lb	22 967 lb		
Maximum weight per round bale (lb) (4' x 4/4' x 5' 1/4 x 5' 6")	2000 lb	2143 lb	1450 lb / 2071 lb	N/A	N/A		
Maximum weight per round bale (lb) (5' x 5' 1/5 x 5' 6")	2500 lb	2500 lb	1706 lb / 2417 lb	N/A	N/A		
Maximum weight per square bale (lb) (3' x 3')	N/A	N/A	N/A	1387 lb	1100 kg (2400 lb)		
Maximum weight per square bale (lb) (4' x 3')	N/A	N/A	N/A	1882 lb	1100 kg (2400 lb)		
Maximum weight per square bale (lb) (4' x 4')	N/A	N/A	N/A	2500 lb	1100 kg (2400 lb)		
<b>BALES PER HOUR TRANSPORTED</b>							
				3' x 3'	4' x 3'	3' x 3'	4' x 3'
On a distance of 0.62 mile (1 km)	55	65	75	75	65	106	78
On a distance of 1.24 mile (2 km)	36	45	55	55	45	85	60
On a distance of 1.86 mile (3 km)	26	34	43	43	34	71	49
On a distance of 2.48 miles (4 km)	21	27	36	36	27	61	41
On a distance of 3.10 miles (5 km)	17	23	30	30	23	53	35

\* Must be equipped with T2-X72F  
 \*\* Must be equipped with T3-ELARG (ELARG-10)

<b>TIRE CHART</b>						
Dimensions	Rim	Width inches (mm)	Diameter inches (mm)	Maximum load per wheels at 40 km/hr lb (kg)	Inflation pressure psi (bar)	Ply plys
400/60-22,5	22,5	16 po (400 mm)	42,1 po (1070 mm)	8820 lb (4000 kg)	51 psi (3,5 bar)	16
550/45-22,5	22,5	22 po (550 mm)	42,1 po (1070 mm)	8050 lb (3650 kg)	30 psi (2,1 bar)	16

# TECHNICAL SPECIFICATIONS


## INLINE WRAPPERS

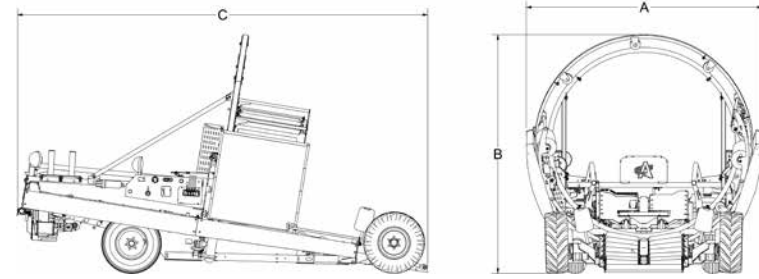

	NWS660	IFX660	HYBRID X	EVOLUTION	
<b>DIMENSIONS</b>	Overall width – A	9' 10" (2,99 m)	9' 10" (2,99 m)	9' 8" (3 m)	12' 1" (3,73 m)
	Overall width (in transport mode)	9' 1" (2,77 m)	9' 1" (2,77 m)	8' 5" (2,56 m)	11' (3,35 m)
	Overall height – B	9' 9" (2,98 m)	9' 9" (2,98 m)	9' 4" (2,87 m)	12' (3,67 m)
	Overall length	18' 5" (5,64 m)	17' (5,18 m)	18' 9" (5,74 m)	21' (6,43 m)
	Overall length (in transport mode)	16' 9" (5,12 m)	17' (5,18 m)	16' 9" (5,12 m)	17' 3" (5,29 m)
	Overall weight	2200 kg (4840 lb)	2200 kg (4840 lb)	2644 kg (5830 lb)	2960 kg (6525 lb)
	Weight on tow bar	440 kg (970 lb)	420 kg (924 lb)	409 kg (902 lb)	758 kg (1672 lb)
<b>BALE CAPACITY</b>	Round bale diameter**	Up to 6' (1,8 m)	Up to 6' (1,8 m)	Up to 6' (1,8 m)	Up to 6' (1,8 m)
	Round bale length	Up to 5' (1,5 m)	Up to 5' (1,5 m)	Up to 5' (1,5 m)	Up to 5' (1,5 m)
	Square bale	N/A	N/A	3' x 3' (80 x 90 cm) or 4' x 3' (90 x 120 cm) up to 6' (1,8 m)	3' x 3' (80 x 90 cm) or 4' x 3' (90 x 120 cm) up to 6' (1,8 m) (single or double stacked)
	Wrapping speed*	Up to 180 bales/h	Up to 180 bales/h	Up to 180 bales/h	Up to 120 bales/h
<b>SPECIFICATIONS</b>	Aluminum film stretcher	2 x 30" (750 mm)	2 x 30" (750 mm) or 4 x 30" (optional)	4 x 30" (750 mm)	4 x 30" (750 mm)
	Engine	13 HP Honda	13 HP Honda	13 HP Honda (20 HP optional)	20 HP Honda
	Final bale push off	Manual	XTRACTOR™ automatic system	XTRACTOR™ automatic system	XTRACTOR™ automatic system
	Bed shape	V-shaped for round bales	V-shaped for round bales	Flat or V-shaped for all type bales	Flat for square bales
	Bale guides for alignment	Ajustable	Ajustable	Ajustable	Ajustable
	Bale guides rollers	2	2	2	2
	Leveling system	Hydraulic jack	Hydraulic lifting axle	Hydraulic lifting axle	Hydraulic jack
	Road lights	Standard	Standard	Standard	Standard
	Hoop speed	Adj. flow control valve	Adj. flow control valve	Adj. flow control valve	Adj. flow control valve
	Traction Tires	29 x 12,5-15	29 x 12,5-15	29 x 12,5-15	31 x 15,5-15
	Rear tires	11L-15	11L-15	11L-15	12,5L-15
	Hydraulic tail gate	Standard	Fixed	Standard	Standard
	Auto-locking wheels	Standard	Standard	Standard	Standard
Adjustable hydraulic compaction system	Standard	Standard	Standard	Standard	

\* Speed based on wrapping 4' bales.  
 \*\* Based on perfectly shaped 6' bales

## INDIVIDUAL WRAPPERS

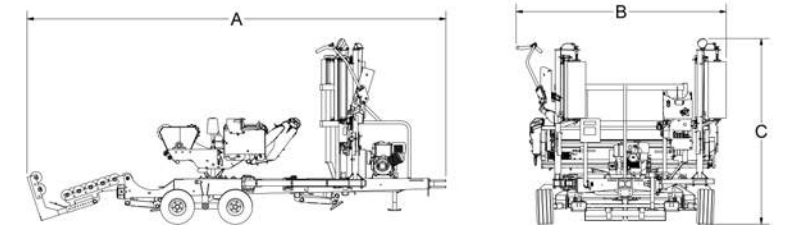


	RB200	RB400	RB500	RB600	RB600 E	RB580	RB680	780SB	
<b>DIMENSIONS</b>	Overall width – B	62 1/4" (1,53 m)	6' 9" (2,1 m)	6' 9" (2,1 m)	6' 9" (2,1 m)	6' 9" (2,1 m)	8' 5" (2,56 m)	7' 4" (2,26 m)	7' 6" (2,34 m)
	Overall height – C	73" (1,85 m)	6' 8" (2,1 m)	6' 8" (2,1 m)	6' 8" (2,1 m)	6' 8" (2,1 m)	9' 8" (2,98 m)	8' 5" (2,60 m)	8' 4" (2,57 m)
	Overall length – A	100 7/8" (2,54 m)	10' 10" (3,3 m)	10' 10" (3,3 m)	10' 10" (3,3 m)	10' 10" (3,3 m)	15' 7" (4,77 m)	15' 7" (4,77 m)	18' 2" (5,56 m)
	Overall weight	612 kg (1350 lb)	800 kg (1763 lb)	800 kg (1763 lb)	800 kg (1763 lb)	800 kg (1763 lb)	1455 kg (3202 lb)	941 kg (2071 lb)	2170 kg (4784 lb)
	<b>BALE CAPACITY</b>	Round bale diameter	Up to 5' 6" (1,65 m)	Up to 5' 6" (1,65 m)	Up to 5' 6" (1,65 m)	Up to 5' 6" (1,65 m)	Up to 5' 6" (1,65 m)	Up to 6' (1,8 m)	Up to 6' (1,8 m)
Round bale length		Up to 5' (1,5 m)	Up to 5' (1,5 m)	Up to 5' (1,5 m)	Up to 5' (1,5 m)	Up to 5' (1,5 m)	Up to 5' (1,5 m)	Up to 5' (1,5 m)	Up to 5' (1,5 m)
Square bale		N/A	N/A	N/A	N/A	N/A	N/A	N/A	3' x 3' up to 6'
Wrapping speed		Up to 30 bales/h	Up to 40 bales/h	Up to 40 bales/h	Up to 40 bales/h	Up to 40 bales/h	Up to 40 bales/h	Up to 65 bales/h	Up to 65 bales/h
Wrapping process		Manual	Manual	Manual	Automatic	Automatic	Manual	Automatic	Automatic
Mode	3 point hitch	Stationary	Stationary	Stationary	Stationary	Pulled behind	Stationary	Stationary	
<b>SPECIFICATIONS</b>	Aluminum film stretcher	1 x 30" (750 mm)	1 x 30" (750 mm)	1 x 30" (750 mm)	1 x 30" (750 mm)	1 x 30" (750 mm)	1 x 30" (750 mm)	1 x 30" (750 mm) or 2 x 30" (optional)	1 x 30" (750 mm) or 2 x 30" (optional)
	Engine	N/A	N/A	N/A	N/A	13 HP Honda (18 A)	N/A	13 HP Honda (18 A)	13 HP Honda (18 A)
	Bale dumper	N/A	N/A	N/A	N/A	N/A	3 positions	1 position or 3 positions (optional)	Bale receiver platform
	Bale guides rollers	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
	Leveling system	N/A	N/A	N/A	N/A	N/A	N/A	Front & rear stabilizers	Front & rear stabilizers
	Road lights	N/A	N/A	N/A	N/A	N/A	For truck	For truck	For truck
	Night Work lights	N/A	N/A	N/A	N/A	Standard	N/A	Standard	Standard
	Tires	N/A	18,5 x 8,5-8 (215/60-8)	18,5 x 8,5-8 (215/60-8)	18,5 x 8,5-8 (215/60-8)	18,5 x 8,5-8 (215/60-8)	26 x 12-12 (300/60-12)	26 x 12-12 (300/60-12)	20,5 x 8-10 (205/65-10)
	High floatation Tires	N/A	N/A	N/A	N/A	N/A	Standard	Standard	Standard
	Plastic cut & hold system	Plastic cut only	N/A	Mechanical	Mechanical	Mechanical	Mechanical	Hydraulic	Hydraulic
	Self-loading arm	N/A	N/A	N/A	N/A	N/A	Standard	N/A	N/A
	Electronic bale counter	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
	Tractor Minimum Hydraulic Flow	8 gal/min (30 litres/min)	8 gal/min (30 litres/min)	8 gal/min (30 litres/min)	8 gal/min (30 litres/min)	Not required	8 gal/min (30 litres/min)	Not required	Not required
Tractor Minimum Hydraulic Pressure	2200 psi	2200 psi	2200 psi	2200 psi	Not required	2200 psi	Not required	Not required	


# TECHNICAL SPECIFICATIONS

## WRAPTOR™

### TRAILER

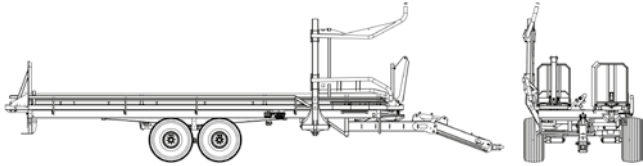

### INLINE WRAPPER

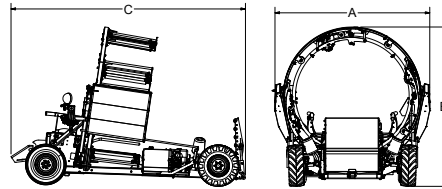

POWERED by  
**HONDA**

WRAPTOR™		TRAILER	INLINE WRAPPER
DIMENSIONS	Width	8' 4" (2,5 m)	9' 6" (2,8 m)
	Overall width (including loading arm) – A	9' 8" (3 m)	In transport mode 8' 5" (2,5 m)
	Height – B	8' 8" (2,7 m)	9' 7" (2,9 m)
	Overall height (including loading arm) – C	12' (3,6 m)	9' 7" (2,9 m)
	Bed height	4' 6" (1,4 m)	N/A
	Overall length – D	41' 3" (12,6 m)	14' 6" (4,4 m)
	Overall weight	4870 kg (10 800 lb)	1620 kg (3571 lb)
BALE	Round bale diameter	Up to 5' (1,5 m)	Up to 5' (1,5 m)
	Square bale	N/A	N/A
	Bale type	Baleage & dry hay	Baleage & dry hay

TRAILER		INLINE WRAPPER		
SPECIFICATIONS	Loading capacity on axle (including bale carrier weight)	18 143 kg (40 000 lb)	Aluminum film stretcher	4 × 30" (750 mm)
	Hydraulic unloading	Standard	Engine	13 HP Honda
	Pusher travel stocke	5' 1" à 7' (1,5 à 2,1 m)	Final bale push off	With the trailer pusher
	Hydraulic push ramp system	Standard	Bed shape	V-shaped for round bales
	Full charge indicator	Standard	Bale guides for alignment	Ajustable
	Double plate hitch	Standard	Bale guides rollers	2
	Road lights	Standard	Leveling system	Hydraulic jack
	Steerable Tandem axle	Standard	Road lights for tractor	Standard
	Self-loading arm design	Tubular round	Hoop speed	Adj. flow control valve
	Tilting tow bar for easy hook-up to wrapper	Standard	Traction Tires	29 × 12,5-15
	Adjustable lateral ramp according to bale dimension	Standard	Rear tires	11 L-15
	Camera	Standard	Hydraulic tail gate	Standard
	Tires	550/45-22,5	Auto-locking wheels	Standard
	Minimum Hydraulic Flow	10 gal/min (37 litres/min)	Adjustable hydraulic compaction system	Standard
	Minimum Hydraulic Pressure	2200 psi	Plastic film watch	N/A
	Minimum HP requirements	100 HP	Working light	N/A
	Remote outlets required	2	Remote control wrapping	Standard
			Large fuel Tank	N/A
			Automatic pilot sensors	N/A
		20 HP Honda engine	N/A	



**Anderson Group**

5125, rue de la Plaisance  
Chesterville, Québec G0P 1J0  
Canada

**T:** 1 888 833-2952

**F:** 1 819 382-2643

**WWW.GRPANDERSON.COM**

---

**GENERAL** Office: 1 888 833-2952  
Email: [info@grpanderson.com](mailto:info@grpanderson.com)  
Website: [www.grpanderson.com](http://www.grpanderson.com)

**SALES** Office: 1 888 833-2952  
Email: [usa@grpanderson.com](mailto:usa@grpanderson.com)

**PARTS AND SERVICE** Office: 1 888 833-2952  
Fax: 1 819 382-2643  
Email: [service@grpanderson.com](mailto:service@grpanderson.com)

**MARKETING** Office: 1 888 833-2952  
Email: [marketing@grpanderson.com](mailto:marketing@grpanderson.com)




GroupAnderson



Anderson Group

All illustrations, photographs and specifications within this catalog are based on the latest product information and may be changed at any time without prior notification or obligation. Anderson Group makes no representation as to the accuracy of this information and reserves the right to make changes at any time, without notice.

**DISCOVER OUR LINE  
OF FORESTRY PRODUCTS:**

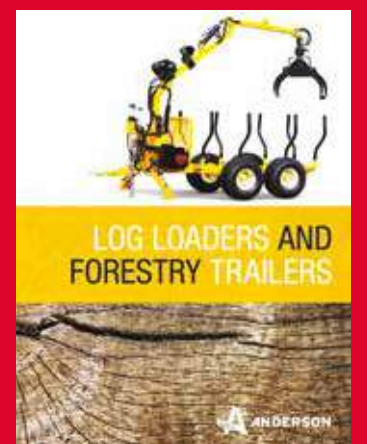





**STORAGE**

**LOGISTIC**

**FEEDING**

**GRPANDERSON.COM**

