MINITRACTOR VERSIONS





ENGINE LOMBARDINI	TRACTION HYDROSTATICS WITH REDUCERS	O.	<u></u>	THIRD HYDRAULIC POINT CONNECTION 12	N ° OF FILES APPLICABLE
18 HP - 2 CIL	4x4	ø760x180	90-130	1 = 550 Kg 2 = 150 Kg	1 FILE
27 HP - 3 CIL	4x4	ø760x180	130-220	1 = 550 Kg 2 = 150 Kg	2 FILES
40 HP - 4 CIL	4x4	ø760x180	130-220	1 = 550 Kg 2 = 150 Kg	3/4 FILES

ON RANGE AND POSSIBLE COMBINATIONS










Ø40



(L) FROM 15 TO 35

N.B. Work on all crops in narrow rows with distance between the rows spacing of 8 to 35 cm.



(L1) DA 8 A 35

OPTIONAL

New 2019 !!!























































Via Torre, 350 - 37056 ENGAZZA' DI SALIZZOLE (VERONA) - ITALY Tel. +39 045 6954392 - Fax. +39 045 6954408 info@dittaoliver.com - www.oliveragro.com





ELFURBO minitractor self-propelled and multi-purpose tool-holder, designed to perform the weeding inside of the rows with maximum practicality and with the help of a single operator.


COMPACTNESS

COMFORT

VISIBILITY

SAVINGS OF TIME AND COST OF STAFF

position rear

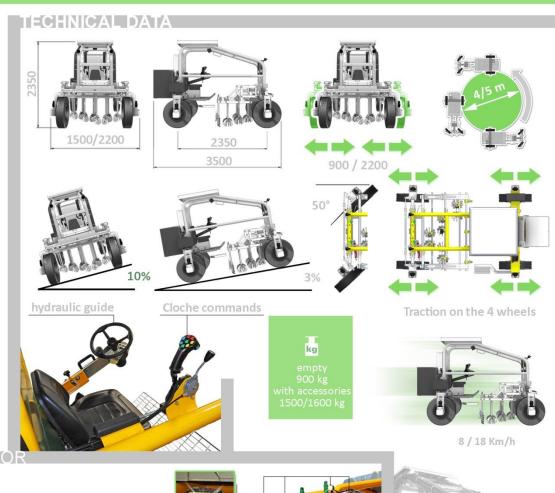



MINITRACTOR APPLICATIONS

ELFURBO supports the Rotoblizz / Rotovert / Colibrì, applications, which act directly on the transplant row without damaging the root and leaf apparatus, eradicating weeds, thus reducing the need for chemical herbicides.









2 Structure supports elements

- Flexible structure One single register key
- Fully adjustable
- Supports basic and optional equipment
















Internal connection consisting of a square bar for fixing rotosark elements with a vertical travel of 300 mm.

ylinders from

18-27-40 hp, respectively