



# Roller

Front-Cutter • Ring roller





# Front-Cutter

The wave crumbling discs in two rows enable a good crumbling effect. Through their cutting function an effective crushing can be guaranteed also on heavy soils .


The wave profil of the discs enable a good levelling, blockages can be avoided through the running into each other. Big dimensioned bearing spots and the robust construction care for a high durability.

## Front-Cutter T

- A 2-part tube roller serves as depth guidance.
- They can be adjusted infinitely via a spindle.
- A considerably advantage is that the depth guidance can be used as an additional re-solidification.



Front-Cutter WW T with tube roller and front knife tine

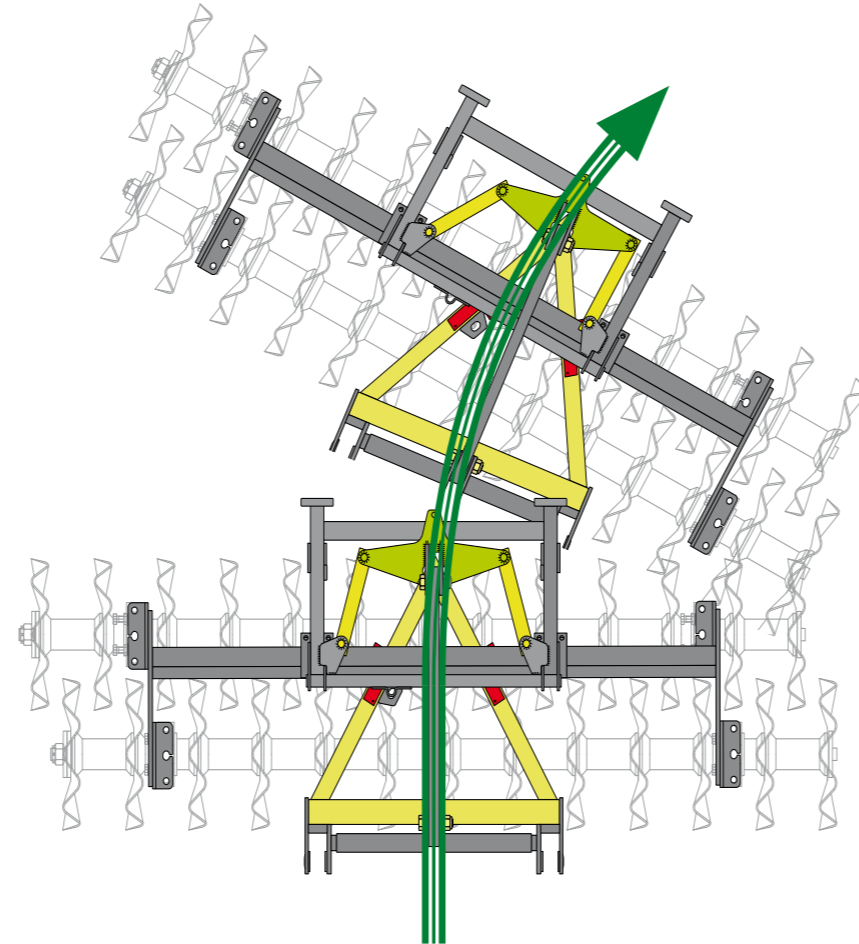

Through the trapezium guide the rollers are directed automatically into the direction of motion.


- easily guidable
- fuel saving
- low-wear

At heavy soils only partly suitable with GPS

# Ring roller

The big dimensioned ring profile roller (600 mm) enables easy pulling and a good re-solidification. Twisted welded spokes care for a self-cleaning effect, an additional scraper bar avoids clogging in front of the roller. For each soil structure the crushing effect can be adjusted through the cleaning tines, which are adjustable between the rings. If you place them high you will have a coarse soil structure, if you place them low you will have a slighter soil structure. With the front weight box you can apply additional ballast weight.

Multifunctional utilisation of the front roller as trailing tool for the cultivator Tukan

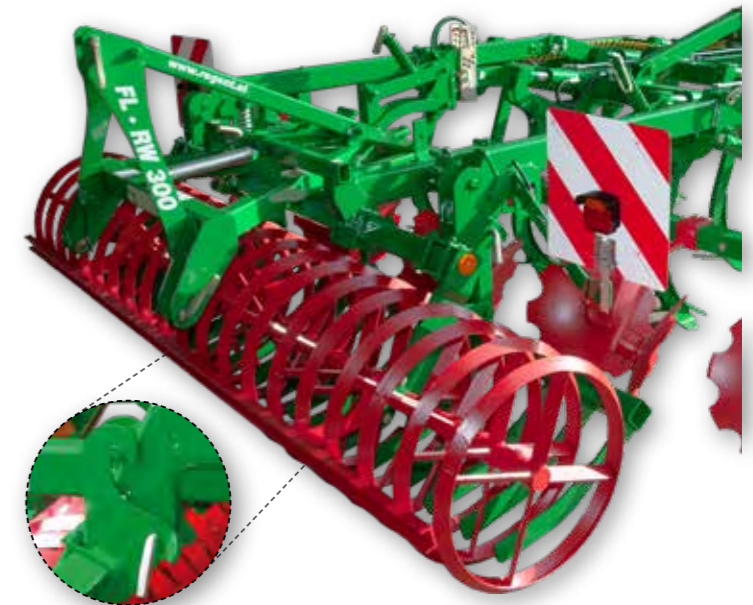

## Front tools for Front-cutter and packer

- Front plate spring section, in 1 row for light to middle soils
- Front knife tine section, in 2 rows for oily soils
- Front spring tine section, in 2 rows for middle soils



Front-Cutter WW T with front plate spring section



Front-packer with front knife tine section in 2 rows



Front-packer with knife tine section



Cutting and crumbling for a good seedbed preparation.





Front-Cutter	Working width cm	Transport width cm	guideable	Discs / rollers ø mm	Weight kg			
					Without front tool	With front balk with spring tines	With front knife tine section	With front plate spring section
F-WW 300	300	300	✓	510	770	880	870	910
F-WW T 300	300	300	✓	510	900	1030	1020	1060
<b>Front-Packer</b>								
FL-RW 250	250	250	✓	600	470	540	530	560
FL-RW 300	300	300	✓	600	530	640	630	670

Subject to technical changes and misprint.

Regent Pflugfabrik GmbH  
Bahnhofstr. 105  
4800 Attnang-Puchheim  
Austria



Tel. +43 7674 62661  
Fax. +43 7674 62207  
info@regent.at  
www.regent.at

