




Round balers

A range to satisfy all harvesting requirements

4

HARVESTING



TOP CUT

EASY MAX

MASTER PLUS

The reduced dimension of the pick-up facilitates the taking up of the product and the feed of the pressing chamber is lightened by the fork introduction device which has strong guides teeth thereby eliminating the risk of clogging caused by irregular windrows and it keeps the feed constant without any interruptions, guaranteeing an improved bale formation.

The top Cut cutting system consists of a rotary feeder, with spirally positioned teeth of the profile of which ensures a clean cut without any pressure, by means of 14 knives with undulating toothing positioned on the frame behind the pick-up. The knives can be either hydraulically engaged or disengaged from the tractor cab. Safety is guaranteed thanks to knives springs.




The pick-up of the latest design makes it possible to adjust the cams externally. The side screws of large diameter convey the picked product towards the centre. The 2200-mm width guarantees perfect harvesting, whilst the rotary feeder avoids entrapment and guarantees feeding of any product.





The net binder with direct introduction in the chamber (net is introduced by the rollers) assures tension right from the start of the binding and thanks to the controlled braking system it improves the binding quality of the external borders.

Introduction of the product into the chamber is completed by the alternative feeder which guarantees constant feeding in order to obtain improved baling.

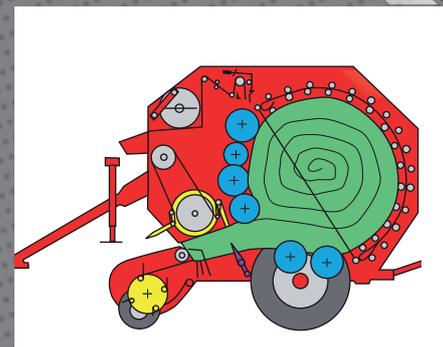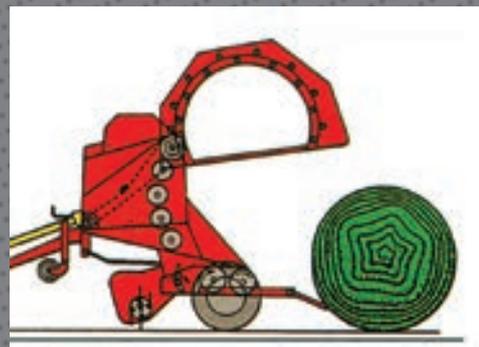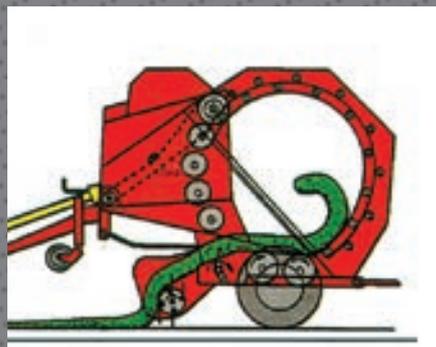


The roller-chain system does not require the disengagement of the PTO at the moment of the opening of the chamber.



- Electronic control box:
- Partial and total counter of the bales
 - Acoustic signal of bale ending
 - Manual or automatic starting of net binding



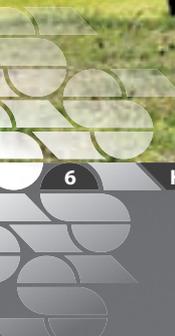

6

HARVESTING

R 170

One single rubber belt

**Great advantages
for high
performances**



170 R

THE UTILITY OF A VARIABLE CHAMBER
More compact bales.
Uniformity of the product rolling.
Easy unrolling of the bale.
Less space for storage.

Unloading of the bale is indicated by a visual warning on the machine.



Electronic control box with the following functions



- Setting of bale's diameter
- Automatic or manual starting of the net binding
- Indicator of bale's making
- Pressure setting
- Bales counter partial or total
- Command for Knives (Top Cut) (if machine is provided)






DENSITY ADJUSTABLE

Adjustable diameter of the bale from 90 till 170 cm.

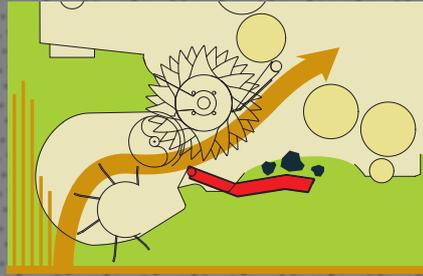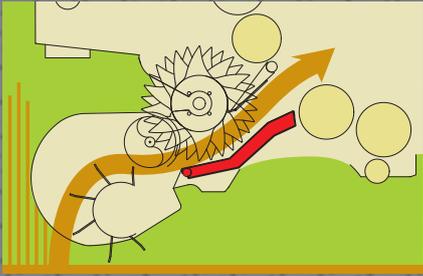


The standard mobile plate Non-Stop (against entrapment) increase the reliability of the machine in baling any type of products

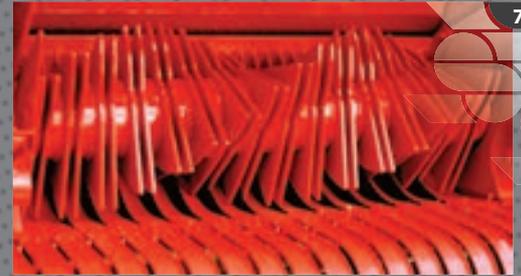

The rotativ feeder guarantees feeding of any products.

Upon request, TOP CUT cutting system with 13 knives hydraulically engaged.

1

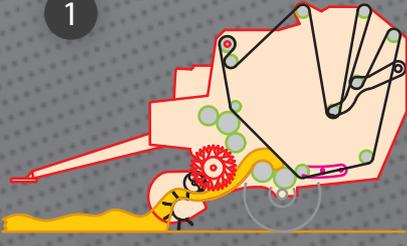

2



3

