

one-axle

one-axle series 2017

Since 1960

ZACCARIA
QUALITY TRAILERS



Since 1960

ZACCARIA

QUALITY TRAILERS

2017 Series

One-axle



Forestry trailers



Platforms



Dumpers



2-3 Axles



Zootechincs



Grape trailers



Special trailers



-60 years of experience

-More than 30.000 trailers sold

-Producing more than 100 models

-6 prize Eima for technical innovation





ZAM 20 M

Standard equipment includes:

- Hydraulic three-way tipping system.
- Mechanical braking system.
- Hydraulic hose with coupling for tipping device.
- Attachment for extension side.
- Nr. 4 winches. Galvanised sides.
- Two bushes to insert vertical poles for timber haulage.
- PTO shaft on driving wheels.

Accessories on demand:

- Front bar for timber haulage.
- Tool box on chassis.
- Additional hydraulic brake.
- Extensions sides.
- Special draw bar eye for export.
- Lateral and rear vertical poles for timber haulage.

STANDARD EQUIPMENT

| MODEL | BODY SIZE <i>cm.</i> | GROSS WEIGHT <i>tons</i> | TARE <i>tons</i> | TYRES | PLATFORM HEIGHT <i>cm.</i> | BRAKE SYSTEM |
|----------|-------------------------|-----------------------------|---------------------|------------|-------------------------------|--------------|
| ZAM 10 N | 210x140x30 | 1.0 | 0.37 | 195-15 | 74 | Mechanical |
| ZAM 15 N | 230x150x35 | 1.5 | 0.5 | 10.0/80-12 | 74 | Mechanical |
| ZAM 20 N | 230x150x35 | 2.0 | 0.5 | 10.0/80-12 | 74 | Mechanical |

DRIVING VERSION

| MODEL | BODY SIZE <i>cm.</i> | GROSS WEIGHT <i>tons</i> | TARE <i>tons</i> | TYRES | PLATFORM HEIGHT <i>cm.</i> | BRAKE SYSTEM |
|----------|-------------------------|-----------------------------|---------------------|------------|-------------------------------|--------------|
| ZAM 10 M | 210x140x30 | 1.0 | 0.47 | 27x8.50-15 | 74 | Mechanical |
| ZAM 15 M | 230x150x35 | 1.5 | 0.6 | 27x8.50-15 | 74 | Mechanical |
| ZAM 20 M | 230x150x35 | 2.0 | 0.6 | 27x8.50-15 | 74 | Mechanical |

The maximum load capacity of trailers can be adapted in conformity with the regulations in force in your country.

one axle

trailers

2



ZAM 50/40 MS
with extensions sides

Standard equipment includes:

- Hydraulic three-way tipping system.
- Mechanical or hydraulic braking system.
- Hydraulic hose with coupling for tipping device.
- Attachments with extension sides.
- Nr. 4 winches. Nr. 2 bushes to insert vertical poles for timber haulage.
- Painted sides.
- PTO shaft available on the article with driving wheels.
- Chequered steel loading platform, facing down.
- Rear columns.
- The rear side opens upwards and downwards.

On demand:

- Lateral sides opens upward and downward.
- Rear door for grain.
- Tool box on chassis.
- Additional hydraulic brake.
- Special draw bar eye for export.
- Vertical poles for timber haulage h. 1,5 mt. Extensions sides.
- Bushes for insert poles at the back or/and on the sides, for timber haulage.

DRIVING VERSION

| MODEL | BODY SIZE cm. | GROSS WEIGHT tons | TARE tons | TYRES | TYRES ON REQUEST | PLATFORM HEIGHT cm. | BRAKING SYSTEM |
|---------------|------------------|----------------------|--------------|--------------|---------------------|---------------------------|----------------|
| ZAM 25 MS | 260x140x40 | 3.0 | 0.77 | 10.0/80-12 | - | 76 | Mechanical |
| ZAM 25 M | 260x160x40 | 3.0 | 0.8 | 10.0/80-12 | - | 76 | Mechanical |
| ZAM 30 M | 280x180x50 | 4.0 | 0.95 | 10.0/75-15.3 | - | 83 | Mechanical |
| ZAM 50/40 MS | 300x160x50 | 4.5 | 0.98 | 10.0/75-15.3 | - | 83 | Mechanical |
| ZAM 50/40 M | 300x185x50 | 4.5 | 1.0 | 10.0/75-15.3 | - | 83 | Mechanical |
| ZAM 50/45 SM | 335x195x50 | 6.0 | 1.2 | 11.5/80-15.3 | 14 - 17,5 forestal | 92/98 | Hydraulic |
| ZAM 50/50 SMS | 350x180x50 | 6.0 | 1.25 | 11.5/80-15.3 | 14 - 17,5 forestal | 92/98 | Hydraulic |
| ZAM 50/50 SM | 350x200x50 | 6.0 | 1.28 | 11.5/80-15.3 | 14 - 17,5 forestal | 92/98 | Hydraulic |

The maximum load capacity of trailers can be adapted in conformity with the regulations in force in your country.



ZAM 50/50 N

Standard equipment includes:

- Hydraulic three-way tipping system.
- Mechanical or hydraulic braking system.
- Hydraulic hose with coupling for tipping device.
- Attachment for extension sides.
- Nr. 4 winches.
- Nr. 2 front bushes to insert poles.
- Galvanised sides.
- Chequered steel loading platform facing down.
- Rear columns.
- The rear side opens upward and downward.

On demand:

- Lateral sides open upward and downward.
- Front bar for timber haulage.
- Rear door for grain. Tools box on chassis.
- Special draw bar eye for export.
- Additional hydraulic brake.
- Vertical poles for timber haulage h. 1,5 mt.
- Extension sides. Net extension sides h. 80 cm.
- Sides made of rectangular tubular steel.
- Bushes to insert poles at the back/on the sides for timber haulage.

STANDARD VERSION

| MODEL | BODY SIZE cm. | GROSS WEIGHT tons | TARE tons | TYRES | TYRES ON REQUEST | PLATFORM HEIGHT cm. | BRAKE SYSTEM |
|---------------|------------------|----------------------|--------------|--------------|--|---------------------------|--------------|
| ZAM 25 NS | 260x140x40 | 3.0 | 0.67 | 10.0/80-12 | - | 76 | Mechanical |
| ZAM 25 N | 260x160x40 | 3.0 | 0.7 | 10.0/80-12 | - | 76 | Mechanical |
| ZAM 30 N | 280x180x50 | 4.0 | 0.85 | 10.0/75-15.3 | 13.0/55-16 | 83 | Mechanical |
| ZAM 50/40 NS | 300x160x50 | 4.5 | 0.88 | 10.0/75-15.3 | 13.0/55-16 | 83 | Mechanical |
| ZAM 50/40 N | 300x185x50 | 4.5 | 0.9 | 10.0/75-15.3 | 13.0/55-16 | 83 | Mechanical |
| ZAM 50/45 N | 335x195x50 | 5.0 | 1.0 | 11.5/80-15.3 | 400/60-15.5 or 285/70R19,5 used | 92/95 | Mechanical |
| ZAM 50/45 SN | 335x195x50 | 6.0 | 1.02 | 11.5/80-15.3 | | 92/95 | Hydraulic |
| ZAM 50/50 N | 350x200x50 | 5.0 | 1.05 | 11.5/80-15.3 | | 92/95 | Mechanical |
| ZAM 50/50 SNS | 350x180x50 | 6.0 | 1.03 | 11.5/80-15.3 | | 92/95 | Hydraulic |
| ZAM 50/50 SN | 350x200x50 | 6.0 | 1.08 | 11.5/80-15.3 | | 92/95 | Hydraulic |

The maximum load capacity of trailers can be adapted in conformity with the regulations in force in your country.

one axle

trailers

4



On demand:

- Lateral sides opens upward and downward.
- Front bar for bales.Front bar for timber haulage.
- Special draw bar eye for export.
- Rear door for grain.
- Tools box on chassis.
- Vertical poles for timber haulage h. 1,5 mt.
- Industrial columns ZAM 70.
- Extension sides.
- Net extension sides h. 80 cm.
- Aluminium sides.
- Sides made of rectangular tubular steel.
- Bushes to insert poles at the back or/and on the sides , for timber haulage.
- Forestry tyres.

ZAM 70 SM
with aluminium sides
and industrial columns

DRIVING VERSION

| MODEL | BODY SIZE cm. | GROSS WEIGHT tons | TARE tons | TYRES | PLATFORM HEIGHT cm. | TYRES ON REQUEST | PLATFORM HEIGHT cm. | BRAKE SYSTEM |
|-----------|------------------|----------------------|--------------|----------------------|------------------------|-------------------------|------------------------|--------------|
| ZAM 60 M | 400x220x50 | 8.0 | 1.8 | 8.5R-17,5 twins news | 92 | 385/55R19,5 simple used | 102 | Hydraulic |
| ZAM 70 M | 470x240x50 | 8.5 | 2.2 | 9.5R-17,5 twins news | 94 | 445/45R19,5 simple used | 102 | Hydraulic |
| ZAM 70 SM | 500x240x50 | 8.5 | 2.3 | 9.5R-17,5 twins news | 94 | | 102 | Hydraulic |

The maximum load capacity of trailers can be adapted in conformity with the regulations in force in your country.

one axle

5 trailers



ZAM 70 N
with extension sides
and industrial columns

Standard equipment includes:

- Hydraulic three-way tipping system.
- Hydraulic hose with coupling for tipping device.
- Hydraulic braking system.
- Attachment for extension sides. Nr. 5 winches.
- Nr. 2 bushes to insert vertical poles for timber haulage.
- Painted sides.
- Chequered steel loading platform, facing down.
- Rear columns. The rear side opens upward and downward.
- PTO shaft available on driving wheels models.
- On models ZAM 70 lateral sides are divided in two parts with industrial columns.

STANDARD VERSION

| MODEL | BODY SIZE cm. | GROSS WEIGHT tons | TARE tons | TYRES | PLATFORM HEIGHT cm. | TYRES ON REQUEST | PLATFORM HEIGHT cm. | BRAKE SYSTEM |
|-----------|------------------|----------------------|--------------|------------------------|------------------------|--------------------------|------------------------|--------------|
| ZAM 60 N | 400x220x50 | 8.0 | 1.5 | 215/75R-17,5 twins new | 92 | 385/55R-19,5 simple used | 102 | Hydraulic |
| ZAM 70 N | 470x240x50 | 8.5 | 1.9 | 245/70R-17,5 twins new | 92 | 445/45R-19,5 simple used | 102 | Hydraulic |
| ZAM 70 SN | 500x240x50 | 8.5 | 2.0 | | 92 | | 102 | Hydraulic |

The maximum load capacity of trailers can be adapted in conformity with the regulations in force in your country.

one axle

dumper 6



ZAM 70 DPN

Standard equipment :

- Hydraulic rear tipping.
- Hydraulic tipping with hoses cupling to the tractor.
- Hydraulic brake.
- PTO shaft for driving version.
- Watertight rear door with hydraulic opening system.

On demand:

- Rear door for grain.
- PVC cover manual system.
- Extension sides.
- Special draw bar eye for export.
- Reinforced body for inert waste.
- Internal body painted with food-compatible paints.



DRIVING VERSION

| MODEL | BODY SIZE cm. | N° AXLES | TARE tons | GROSS WEIGHT tons | TYRES | TYRES ON REQUEST | BRAKE SYSTEM | VOL. m ³ | TIPPING |
|------------|------------------|-------------|--------------|-------------------------|------------------|--|-----------------|------------------------|---------|
| ZAM 60 DPM | 400x220x110 | 1 | 2.1 | 8.0 | 385/55R22,5 used | 425/55R19,5 used or 550/45-22,5 Flotation | Hydraulic | 9 | Rear |
| ZAM 70 DPM | 470x240x110 | 1 | 2.5 | 8.5 | 385/55R22,5 used | | | 12 | |

STANDARD VERSION

| MODEL | BODY SIZE cm. | N° AXLES | TARE tons | GROSS WEIGHT tons | TYRES | TYRES ON REQUEST | BRAKE SYSTEM | VOL. m ³ | TIPPING |
|------------|------------------|-------------|--------------|-------------------------|------------------|--|-----------------|------------------------|---------|
| ZAM 60 DPN | 400x220x110 | 1 | 1.9 | 8.0 | 385/55R22,5 used | 495/45R22,5 used or 550/45-22,5 Flotation | Hydraulic | 9 | Rear |
| ZAM 70 DPN | 470x240x110 | 1 | 2.3 | 8.5 | 385/55R22,5 used | | | 12 | |

The maximum load capacity of trailers can be adapted in conformity with the regulations in force in your country.

one axle

7 dumper

ZAM 50 D

DUMPER WITH HYDRAULIC REAR TIPPING SYSTEM

Standard equipment:

Watertight body.
Double piston tipping device.

On request:

Galvanised body or stainless steel body.
Extension sides.
Special draw bar eye for export.
Internal food compatible paint.



ZAM 40 D

Stainless steel body

| MODEL | BODY SIZE cm. | N°AXLES | TARE tons | GROSS WEIGHT tons | TYRES | BRAKE SYSTEM | HEIGHT OF LOADING cm. | VOLUME m ³ | TIPPING |
|-------------------|------------------|---------|--------------|-------------------------|------------|-----------------|-----------------------------|--------------------------|---------|
| ZAM 25 D | 265 x 155 x 80 | 1 | 0.6 | 3.0 | 10-15 | Mechanical | 110 | 2.5 | Rear |
| ZAM 40 D | 300 x 175 x 100 | 1 | 0.75 | 4.5 | 10-15 | Mechanical | 115 | 3.6 | |
| ZAM 50 D SUPER | 340 x 190 x 114 | 1 | 1.25 | 6.0 | 13.0/65-18 | Hydraulic | 115 | 6 | |

The maximum load capacity of trailers can be adapted in conformity with the regulations in force in your country.

one axle

trailers 8



ZAM 60 BR

TRAILERS SERIES BR

Standard equipment:


Standard equipment with double effect hydraulic piston.
Rear loading boards.
Front bar for bales.

On request:

Rear bar for bales.
Tyres new.
Special draw bar eye for export.

NORMAL VERSION WITH TIPPING PLATFORM

| MODEL | BODY SIZE <i>cm.</i> | AXLE | TARE <i>tons</i> | GROSS WEIGHT <i>tons</i> | TYRES | BRAKE SYSTEM | PLATFORM HEIGHT <i>cm.</i> |
|-----------------------|-------------------------|------|---------------------|-----------------------------|---------------------------|--------------|-------------------------------|
| ZAM 60 BR | 490 x 240 | 1 | 1.5 | 8.0 | 215/75R17.5 twins used | Hydraulic | 84 |
| ZAM 60 BR MAXI | 610 x 245 | 1 | 1.8 | 8.5 | | | |

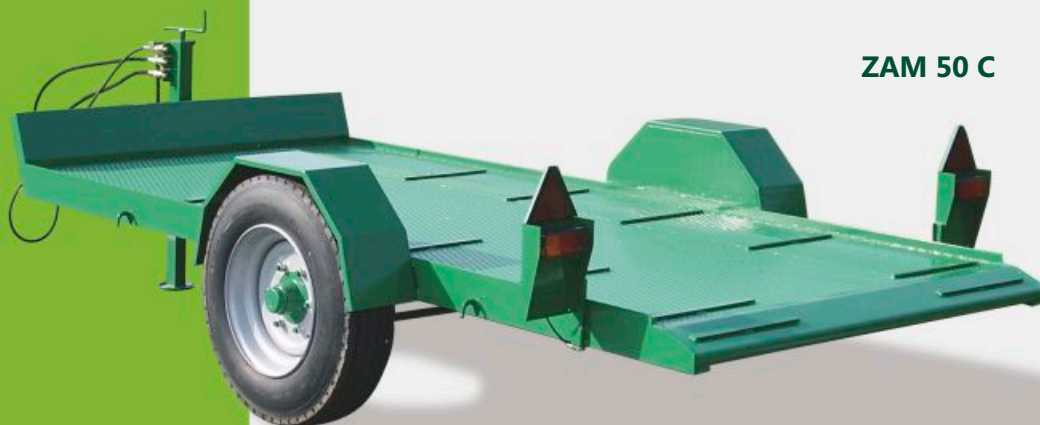

ZAM 50 C

Standard equipment:

Tipping platform with double effect hydraulic piston.

On request:

Hydraulic braking system.
Tyres new.
Special draw bar eye for export.

NORMAL VERSION WITH TIPPING PLATFORM

| MODEL | BODY SIZE <i>cm.</i> | TARE <i>tons</i> | GROSS WEIGHT <i>tons</i> | TYRES | BRAKE SYSTEM |
|-----------------------|-------------------------|---------------------|-----------------------------|---------------------|--------------|
| ZAM 50 C | 350 x 160 | 0.8 | 5.0 | 215/75R17.5 used | Mechanical |
| ZAM 50 C super | 350 x 180 | 0.9 | 5.0 | | Mechanical |

The maximum load capacity of trailers can be adapted in conformity with the regulations in force in your country.



ZAM 60 BF MAXI

TRAILERS SERIES BF

Standard equipment:

Fixed platform with front bar for bales.

On demand:

Hydraulic loading ramps adjustable for length mm 500x2000.
Removable ramps (int. ramps 1050÷650).
Rear distributor for operating the ramps.
Rear bar for bales.
Special draw bar eye for export.
Driving wheels version.
Tyres new.

FIXED PLATFORM VERSION

| MODEL | BODY SIZE <i>cm.</i> | AXLES | TARE <i>tons</i> | GROSS WEIGHT <i>tons</i> | TYRES | BRAKE SYSTEM | PLATFORM HEIGHT <i>cm.</i> |
|-----------------------|-------------------------|-------|---------------------|-----------------------------|---------------------------|--------------|-------------------------------|
| ZAM 60 BF | 490 x 240 | 1 | 1.5 | 8.0 | 215/75R17.5 twins used | Hydraulic | 84 |
| ZAM 60 BF MAXI | 610 x 245 | 1 | 1.8 | 8.5 | | | |

The maximum load capacity of trailers can be adapted in conformity with the regulations in force in your country.

ZACCARIA
QUALITY TRAILERS



ZACCARIA SRL
Via Enrico Fermi, 350
I - 41055 Montese (Modena) - Italy
Tel. +39 (0)59 981750
Fax: +39 (0)59 982353
www.zaccariarimorchi.com
info@zaccariarimorchi.com

Subsidiaries and Warehouses :

I - 41015 Nonantola (Modena)
Via Zuccola, 12 - Italy

I - 41057 Spilamberto (Modena)
Piazza Beccadori, 4 - Italy

 www.facebook.com/zaccariarimorchi

 www.linkedin.com/company/zaccaria-srl

 www.youtube.com/channel/UCe9-IOXLYuqygcinU1n51jA

